

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1245360

Luminaire Tested: PRLX-UNA-L-940-02L-U-OW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245360
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2412-299-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UNA-L-940-02L-U-OW
Description: 3D PRINTED PENDANT LED LUMINAIRE, LARGE LIGHT ENGINE, OPEN WEAVE SHADE TEXTURE LIGHT LEVEL 1
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 254.0 lumens
Efficiency: N/A
Efficacy: 45.4 lumens/watt
Spacing Criteria (0/90/45): 0.2 / 0.2 / 0.2
Luminous Opening: Rectangular w/ Sides (W: 0.58' x L: 0.58' x H: 1.92')
CIE Type: General Diffuse

Input Watts (W): 5.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

TEST NUMBER: P1245360

CATALOG NUMBER: PRLX-UNA-L-940-02L-U-OW

Luminous Intensity Polar Plot

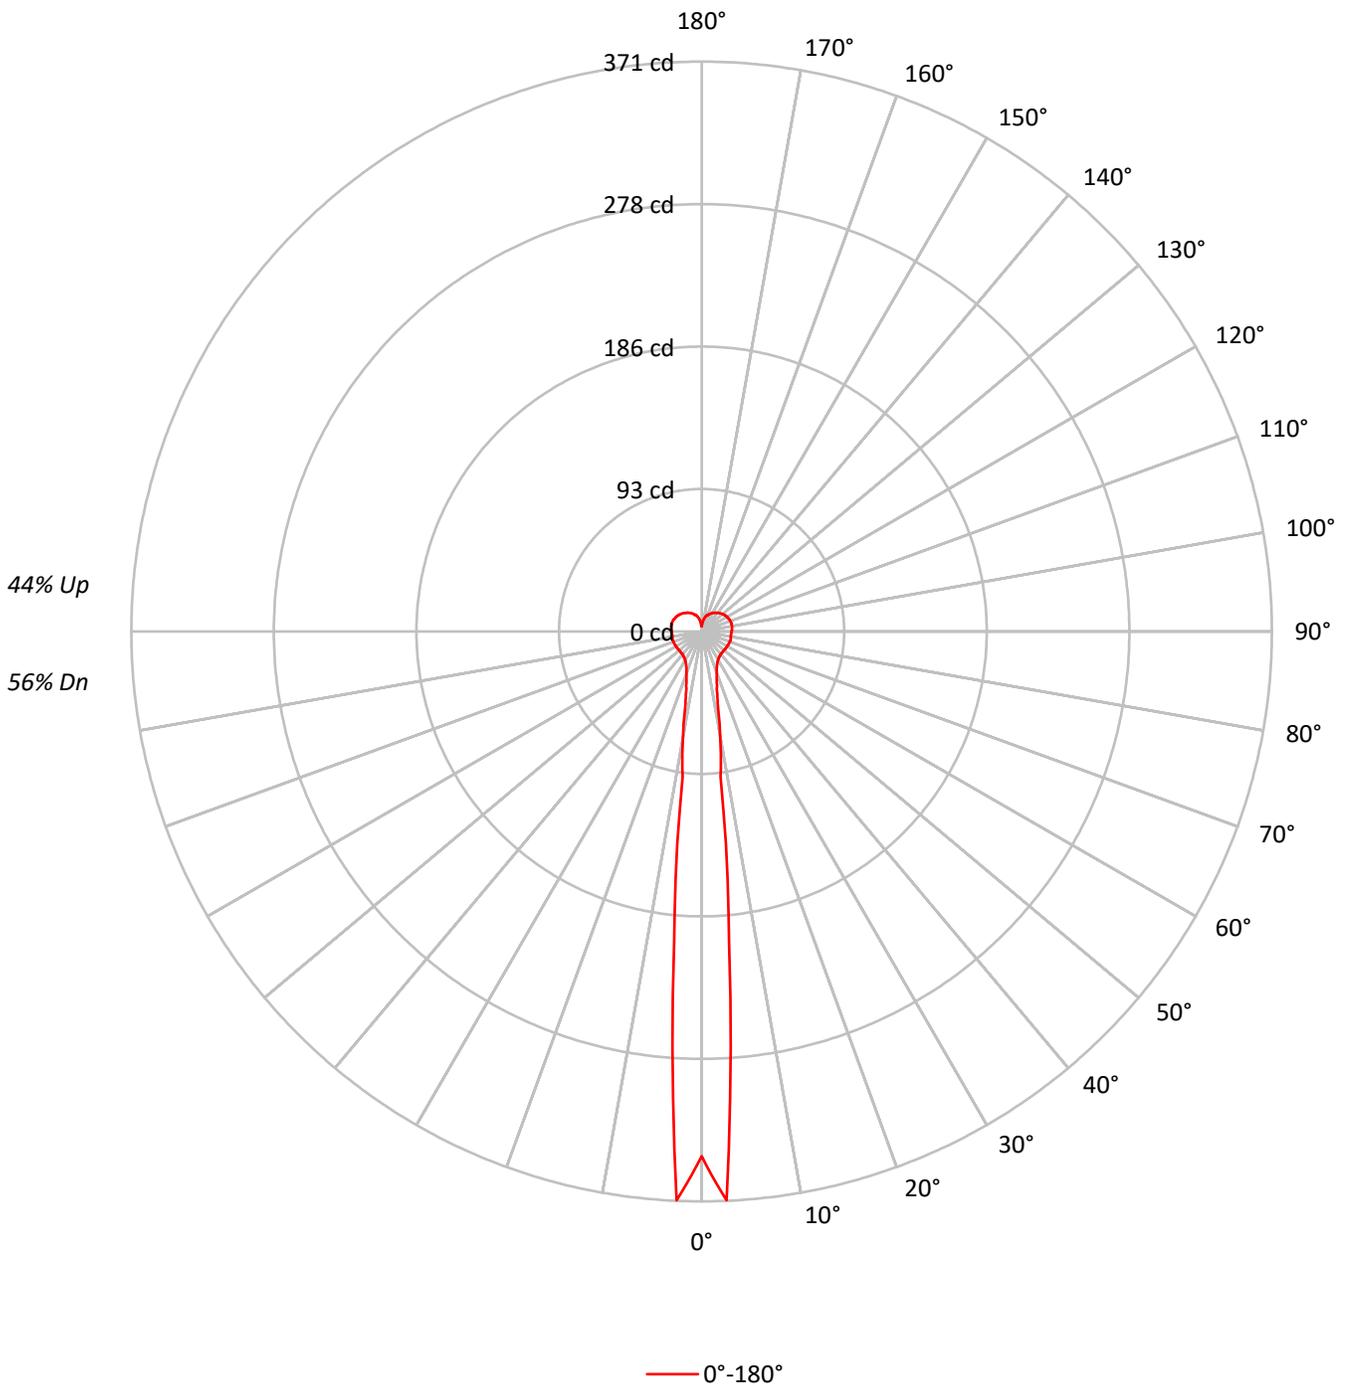



TEST NUMBER: P1245360

CATALOG NUMBER: PRLX-UNA-L-940-02L-U-OW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87		74	74	74		62	62	62	56
1	96	90	85	80	88	83	79	75	71	68	64		60	57	55		49	47	46	40
2	86	77	70	64	80	72	65	59	61	56	51		51	47	44		42	39	37	32
3	79	68	59	52	72	63	55	49	54	48	43		45	40	37		37	34	31	27
4	72	60	51	44	66	56	48	42	48	41	37		40	35	31		33	30	27	23
5	66	54	45	38	61	50	42	36	43	37	32		36	31	28		30	27	23	20
6	61	48	40	34	57	45	37	32	39	33	28		33	28	25		28	24	21	18
7	57	44	36	30	53	41	34	28	36	30	25		31	26	22		26	22	19	17
8	53	41	33	27	49	38	31	26	33	27	23		29	24	20		24	21	18	15
9	50	37	30	25	46	35	28	23	31	25	21		27	22	19		23	19	16	14
10	47	35	27	22	44	33	26	21	29	23	19		25	21	17		22	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	10807
5°	5066
10°	1424
15°	669
20°	442
25°	328
30°	270
35°	235
40°	212
45°	199
50°	190
55°	185
60°	182
65°	180
70°	180
75°	182
80°	179
85°	182

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 199 cd/sqm

TEST NUMBER: P1245360

CATALOG NUMBER: PRLX-UNA-L-940-02L-U-OW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.2	6.0
10°-20°	11.4	4.5
20°-30°	11.1	4.4
30°-40°	12.7	5.0
40°-50°	14.8	5.8
50°-60°	17.2	6.8
60°-70°	19.2	7.6
70°-80°	20.7	8.2
80°-90°	21.1	8.3
90°-100°	21.7	8.5
100°-110°	21.2	8.4
110°-120°	19.4	7.6
120°-130°	16.5	6.5
130°-140°	13.0	5.1
140°-150°	9.3	3.7
150°-160°	5.9	2.3
160°-170°	2.9	1.1
170°-180°	0.6	0.2
0°-30°	37.8	14.9
0°-40°	50.5	19.9
0°-60°	82.4	32.4
0°-90°	143.5	56.5
90°-120°	62.3	24.5
90°-150°	101.2	39.8
90°-180°	110.0	43.3
0°-180°	254.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	342	
5°	205	15
15°	38	11
25°	24	11
35°	20	13
45°	19	15
55°	19	17
65°	19	19
75°	20	21
85°	19	16
90°	20	11
95°	20	16
105°	20	21
115°	20	19
125°	18	17
135°	17	13
145°	15	9
155°	13	6
165°	10	3
175°	5	1
180°	3	

TEST NUMBER: P1245360

CATALOG NUMBER: PRLX-UNA-L-940-02L-U-OW

CANDELA DISTRIBUTION (FULL):

0°	
0°	341.6
2.5°	370.7
5°	205.4
7.5°	95.2
10°	70.0
12.5°	48.2
15°	38.4
17.5°	32.7
20°	28.8
22.5°	25.8
25°	23.8
27.5°	22.4
30°	21.4
32.5°	20.7
35°	20.1
37.5°	19.7
40°	19.3
42.5°	19.2
45°	19.1
47.5°	19.0
50°	19.0
52.5°	19.1
55°	19.1
57.5°	19.2
60°	19.2
62.5°	19.3
65°	19.4
67.5°	19.5
70°	19.5
72.5°	19.7
75°	19.7
77.5°	19.5
80°	19.3
82.5°	19.3
85°	19.3
87.5°	19.4
90°	19.5
92.5°	19.8
95°	19.9
97.5°	20.0
100°	20.1
102.5°	20.1
105°	20.1
107.5°	20.0
110°	19.9



TEST NUMBER: P1245360

CATALOG NUMBER: PRLX-UNA-L-940-02L-U-OW

CANDELA DISTRIBUTION (continued):

	0°
112.5°	19.8
115°	19.5
117.5°	19.3
120°	19.1
122.5°	18.8
125°	18.4
127.5°	18.1
130°	17.7
132.5°	17.3
135°	16.8
137.5°	16.4
140°	15.8
142.5°	15.3
145°	14.8
147.5°	14.3
150°	13.8
152.5°	13.2
155°	12.6
157.5°	12.0
160°	11.4
162.5°	10.8
165°	10.0
167.5°	9.1
170°	8.0
172.5°	6.7
175°	5.2
177.5°	3.9
180°	3.4



TEST NUMBER: P1245360

CATALOG NUMBER: PRLX-UNA-L-940-02L-U-OW

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	1.6	2.6	2.4	3.5	4.7	1.6	2.6	2.4	3.5	4.7
	3H	4.4	5.3	5.3	6.2	7.4	4.4	5.3	5.3	6.2	7.4
	4H	5.8	6.7	6.7	7.6	8.8	5.8	6.7	6.7	7.6	8.8
	6H	7.1	7.9	8.0	8.9	10.1	7.1	7.9	8.0	8.9	10.1
	8H	7.7	8.5	8.7	9.5	10.7	7.7	8.5	8.7	9.5	10.7
	12H	8.4	9.1	9.3	10.1	11.3	8.4	9.1	9.3	10.1	11.3
4H	2H	2.3	3.2	3.2	4.1	5.3	2.3	3.2	3.2	4.1	5.3
	3H	5.3	6.1	6.2	7.0	8.2	5.3	6.1	6.2	7.0	8.2
	4H	6.8	7.6	7.8	8.5	9.8	6.8	7.6	7.8	8.5	9.8
	6H	8.3	9.0	9.3	10.0	11.2	8.3	9.0	9.3	10.0	11.2
	8H	9.1	9.7	10.0	10.7	11.9	9.1	9.7	10.0	10.7	11.9
	12H	9.8	10.4	10.8	11.3	12.6	9.8	10.4	10.8	11.3	12.6
8H	4H	7.3	7.9	8.3	8.9	10.2	7.3	7.9	8.3	8.9	10.2
	6H	9.0	9.6	10.0	10.6	11.8	9.0	9.6	10.0	10.6	11.8
	8H	9.9	10.4	10.9	11.4	12.6	9.9	10.4	10.9	11.4	12.6
	12H	10.8	11.2	11.8	12.2	13.5	10.8	11.2	11.8	12.2	13.5
12H	4H	7.4	8.0	8.4	9.0	10.2	7.4	8.0	8.4	9.0	10.2
	6H	9.2	9.7	10.2	10.7	12.0	9.2	9.7	10.2	10.7	12.0
	8H	10.2	10.6	11.1	11.6	12.9	10.2	10.6	11.1	11.6	12.9

(END OF REPORT)