

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P979277

Luminaire Tested: PRLX-CYL6-927-18L-MD-U-S-X-X-WHTE

Issue Date: 4/3/2025

**Test Information**

Test Method: LM-79-2019  
Report Number: P979277  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2502-353-3)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 4/3/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PrentaLux  
Catalog Number: PRLX-CYL6-927-18L-MD-U-S-X-X-WHTE  
Description: 3D PRINTED LUMINAIRE, INTEGRAL LED LIGHT ENGINE, WHITE TRIM WITH MEDIUM OPTIC  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1633.2 lumens  
Efficiency: N/A  
Efficacy: 148.5 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44  
Luminous Opening: Circular (Dia: 1.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 11  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P979277

CATALOG NUMBER: PRLX-CYL6-927-18L-MD-U-S-X-X-WHTE

### Luminous Intensity Polar Plot

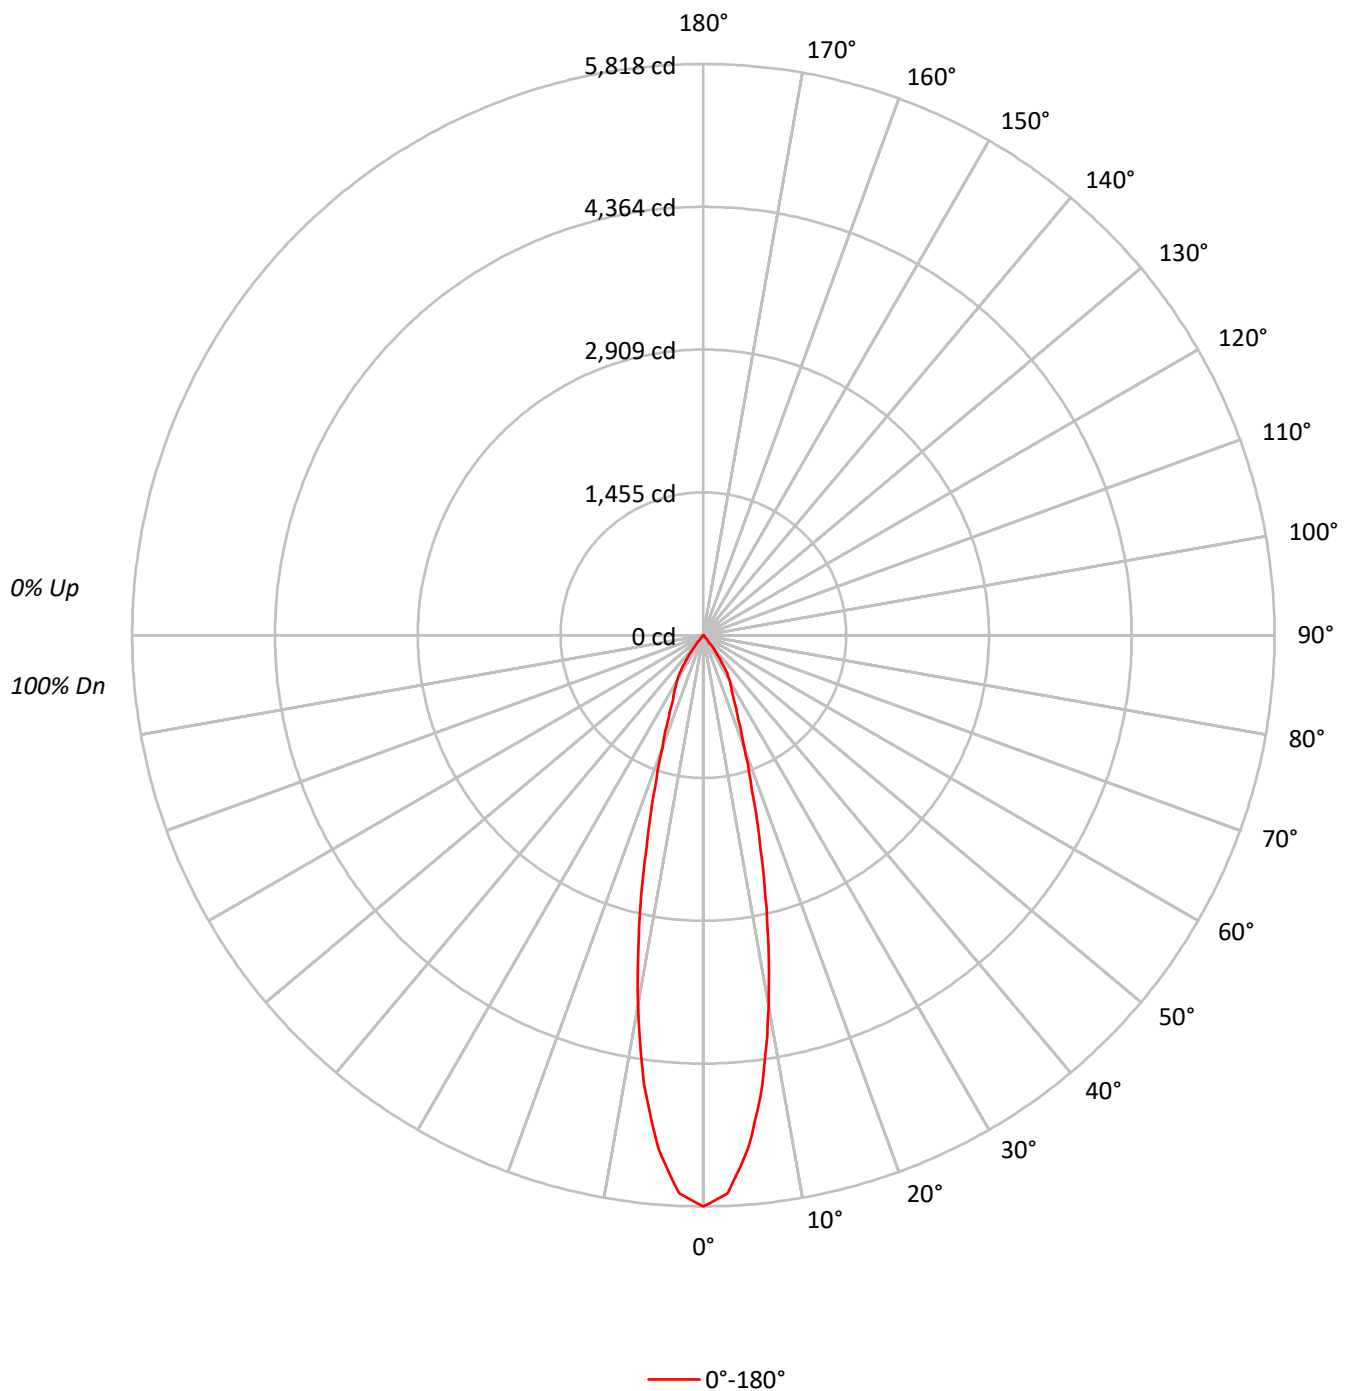

TEST NUMBER: P979277

CATALOG NUMBER: PRLX-CYL6-927-18L-MD-U-S-X-X-WHTE

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 115 | 112 | 110 | 108 | 112 | 110 | 108 | 107 | 106 | 105 | 103 |  | 103 | 101 | 100 |  | 99  |
| 2   | 110 | 106 | 103 | 100 | 108 | 105 | 102 | 99  | 102 | 99  | 97  |  | 99  | 97  | 95  |  | 96  |
| 3   | 106 | 101 | 97  | 94  | 104 | 100 | 96  | 93  | 97  | 94  | 92  |  | 95  | 93  | 90  |  | 93  |
| 4   | 102 | 96  | 92  | 89  | 101 | 95  | 91  | 88  | 93  | 90  | 87  |  | 92  | 89  | 86  |  | 90  |
| 5   | 99  | 92  | 88  | 84  | 97  | 91  | 87  | 84  | 90  | 86  | 83  |  | 88  | 85  | 83  |  | 87  |
| 6   | 95  | 88  | 84  | 80  | 94  | 88  | 83  | 80  | 86  | 83  | 80  |  | 85  | 82  | 79  |  | 84  |
| 7   | 92  | 85  | 80  | 77  | 91  | 84  | 80  | 77  | 83  | 79  | 76  |  | 82  | 79  | 76  |  | 81  |
| 8   | 89  | 82  | 77  | 74  | 88  | 81  | 77  | 74  | 80  | 76  | 73  |  | 79  | 76  | 73  |  | 78  |
| 9   | 86  | 79  | 74  | 71  | 85  | 78  | 74  | 71  | 77  | 74  | 71  |  | 77  | 73  | 71  |  | 76  |
| 10  | 84  | 76  | 72  | 69  | 83  | 76  | 71  | 68  | 75  | 71  | 68  |  | 74  | 71  | 68  |  | 74  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 58582 |
| 5°  | 53039 |
| 10° | 39150 |
| 15° | 23323 |
| 20° | 13056 |
| 25° | 8206  |
| 30° | 6256  |
| 35° | 3561  |
| 40° | 610   |
| 45° | 110   |
| 50° | 56    |
| 55° | 46    |
| 60° | 30    |
| 65° | 24    |
| 70° | 29    |
| 75° | 39    |
| 80° | 29    |
| 85° | 58    |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 87.5°  
Luminance: 115 cd/sqm

TEST NUMBER: P979277

CATALOG NUMBER: PRLX-CYL6-927-18L-MD-U-S-X-X-WHTE

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 455.6  | 27.9      |
| 10°-20°   | 629.3  | 38.5      |
| 20°-30°   | 358.5  | 22.0      |
| 30°-40°   | 175.8  | 10.8      |
| 40°-50°   | 9.2    | 0.6       |
| 50°-60°   | 2.3    | 0.1       |
| 60°-70°   | 1.2    | 0.1       |
| 70°-80°   | 0.9    | 0.1       |
| 80°-90°   | 0.5    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1443.4 | 88.4      |
| 0°-40°    | 1619.2 | 99.1      |
| 0°-60°    | 1630.7 | 99.8      |
| 0°-90°    | 1633.2 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1633.2 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 5818 |      |
| 5°  | 5248 | 456  |
| 15° | 2237 | 629  |
| 25° | 739  | 358  |
| 35° | 290  | 176  |
| 45° | 8    | 9    |
| 55° | 3    | 2    |
| 65° | 1    | 1    |
| 75° | 1    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P979277

CATALOG NUMBER: PRLX-CYL6-927-18L-MD-U-S-X-X-WHTE

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 5818.1 |
| 2.5°  | 5687.2 |
| 5°    | 5247.5 |
| 7.5°  | 4614.0 |
| 10°   | 3829.1 |
| 12.5° | 3014.2 |
| 15°   | 2237.4 |
| 17.5° | 1646.3 |
| 20°   | 1218.5 |
| 22.5° | 937.0  |
| 25°   | 738.6  |
| 27.5° | 621.6  |
| 30°   | 538.1  |
| 32.5° | 432.4  |
| 35°   | 289.7  |
| 37.5° | 145.9  |
| 40°   | 46.4   |
| 42.5° | 11.9   |
| 45°   | 7.7    |
| 47.5° | 4.6    |
| 50°   | 3.6    |
| 52.5° | 3.1    |
| 55°   | 2.6    |
| 57.5° | 2.1    |
| 60°   | 1.5    |
| 62.5° | 1.5    |
| 65°   | 1.0    |
| 67.5° | 1.0    |
| 70°   | 1.0    |
| 72.5° | 1.0    |
| 75°   | 1.0    |
| 77.5° | 0.5    |
| 80°   | 0.5    |
| 82.5° | 0.5    |
| 85°   | 0.5    |
| 87.5° | 0.5    |
| 90°   | 0.0    |

TEST NUMBER: P979277

CATALOG NUMBER: PRLX-CYL6-927-18L-MD-U-S-X-X-WHTE

**CIE UGR TABLE:**

| Reflectances:   |      |                  |      |      |      |      |                |      |      |      |      |
|-----------------|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Ceiling         |      | 0.7              | 0.7  | 0.5  | 0.5  | 0.3  | 0.7            | 0.7  | 0.5  | 0.5  | 0.3  |
| Wall            |      | 0.5              | 0.3  | 0.5  | 0.3  | 0.3  | 0.5            | 0.3  | 0.5  | 0.3  | 0.3  |
| Reference plane |      | 0.2              | 0.2  | 0.2  | 0.2  | 0.2  | 0.2            | 0.2  | 0.2  | 0.2  | 0.2  |
| Room dimensions |      | Viewed crosswise |      |      |      |      | Viewed endwise |      |      |      |      |
| X=2H            | Y=2H | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 3H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 4H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 6H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 8H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 12H  | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
| 4H              | 2H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 3H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 4H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 6H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 8H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 12H  | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
| 8H              | 4H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 6H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 8H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 12H  | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
| 12H             | 4H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 6H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 8H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |

END OF REPORT