

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503507

Luminaire Tested: PRLX-SM4-01-LS-FS-010-XXXX-DIFF-VF (3000K-650LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503507
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-2)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-01-LS-FS-010-XXXX-DIFF-VF (3000K-650LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, ROUND, DIFFUSE LENS
LIGHT LEVEL 1 - 650 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 3000K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 371.3 lumens
Efficiency: N/A
Efficacy: 57.1 lumens/watt
Spacing Criteria (0/90/45): 5.36 / 5.36 / 4.75
Luminous Opening: Vertical Cylinder (Dia: 0.5' x H: 0.14')
CIE Type: General Diffuse

Input Watts (W): 6.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503507

CATALOG NUMBER: PRLX-SM4-01-LS-FS-010-XXXX-DIFF-VF (3000K-650LM)

Luminous Intensity Polar Plot

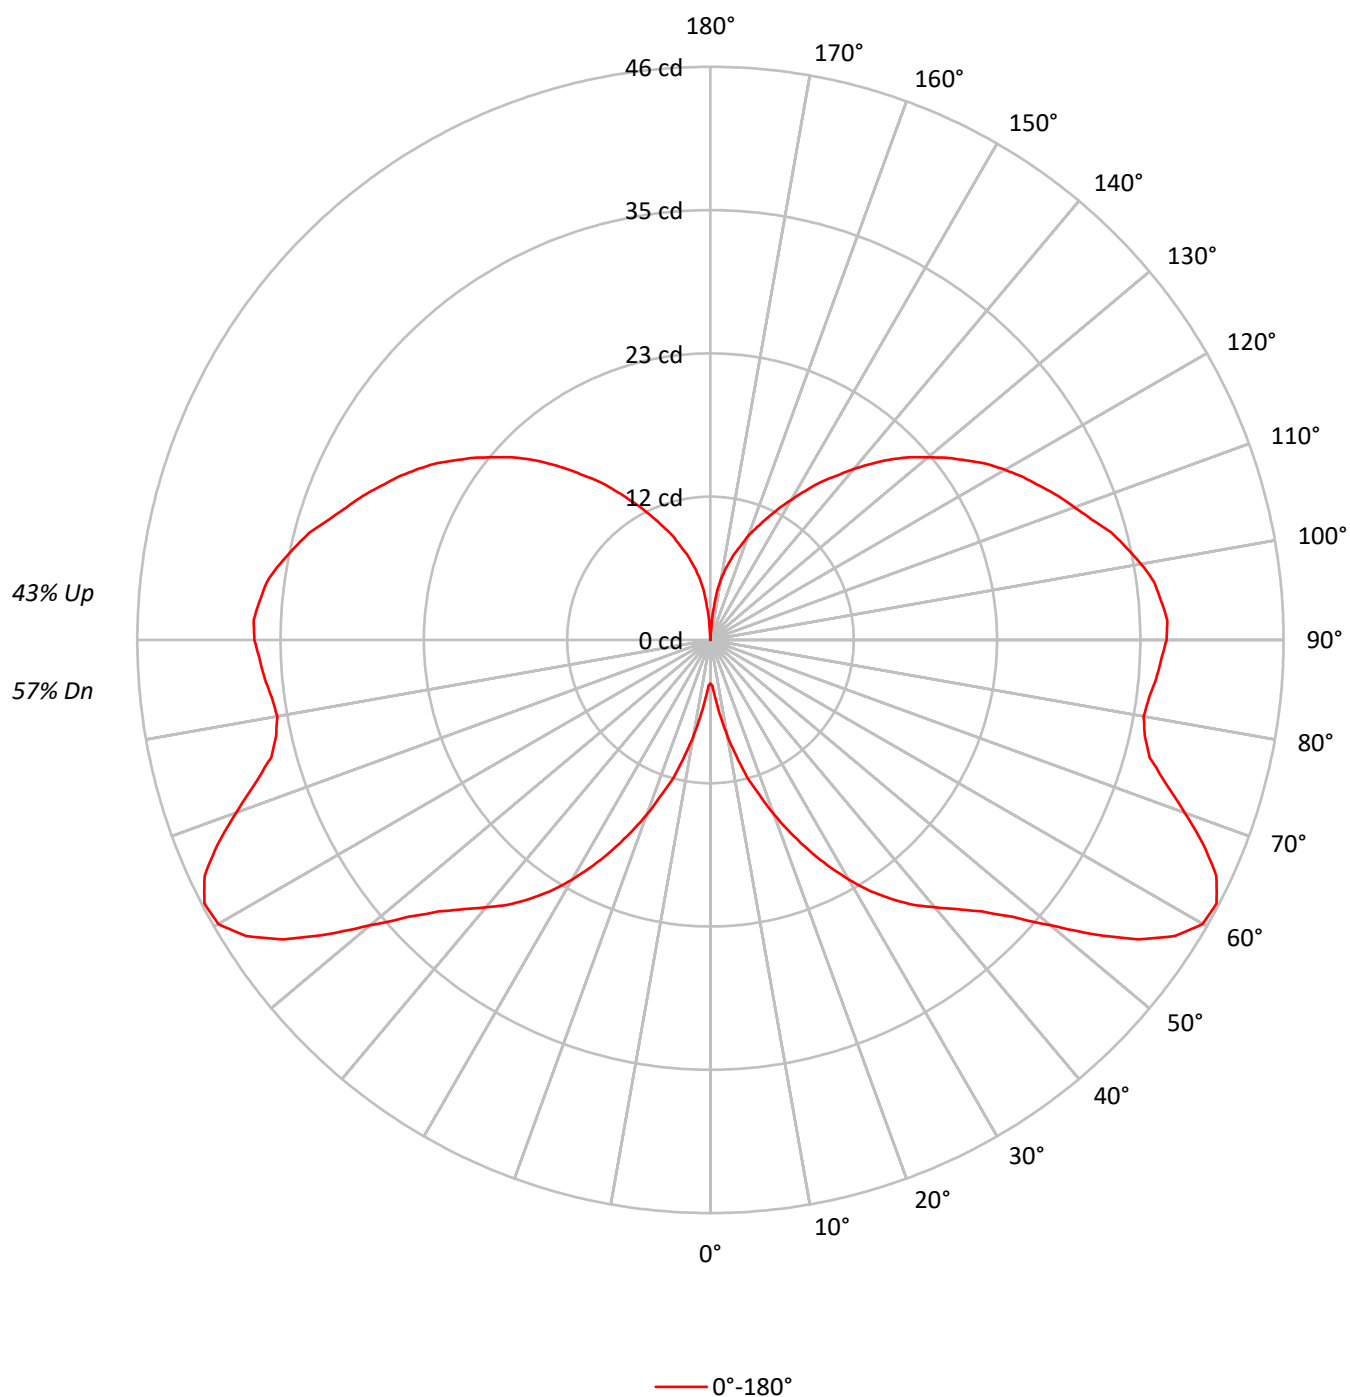



TEST NUMBER: P1503507

CATALOG NUMBER: PRLX-SM4-01-LS-FS-010-XXXX-DIFF-VF (3000K-650LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	63	63	63	57		
1	94	87	81	75	86	80	75	70	68	64	60	57	54	51	47	44	42	37		
2	83	73	64	57	76	67	59	53	56	50	45	46	42	38	37	34	31	26		
3	74	62	52	44	68	57	48	41	47	41	35	39	34	29	31	27	23	19		
4	67	53	43	36	61	49	40	33	41	34	28	33	28	23	26	22	18	14		
5	61	46	36	29	55	43	34	27	36	28	23	29	23	19	23	18	15	11		
6	55	41	31	24	51	38	29	22	31	24	19	26	20	15	20	16	12	9		
7	51	36	27	21	46	34	25	19	28	21	16	23	17	13	18	14	10	7		
8	47	33	24	18	43	30	22	16	25	19	14	21	15	11	16	12	9	6		
9	44	30	21	15	40	27	19	14	23	16	12	19	13	10	15	11	7	5		
10	40	27	19	13	37	25	17	12	21	15	10	17	12	8	14	9	6	4		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	194
5°	254
10°	413
15°	598
20°	780
25°	979
30°	1183
35°	1382
40°	1569
45°	1792
50°	2171
55°	2707
60°	3157
65°	3368
70°	3360
75°	3406
80°	3797
85°	4598

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 90°

Luminance: 5849 cd/sqm

TEST NUMBER: P1503507

CATALOG NUMBER: PRLX-SM4-01-LS-FS-010-XXXX-DIFF-VF (3000K-650LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	0.6	0.1
10°-20°	3.3	0.9
20°-30°	8.7	2.3
30°-40°	16.0	4.3
40°-50°	24.2	6.5
50°-60°	37.2	10.0
60°-70°	43.8	11.8
70°-80°	39.2	10.6
80°-90°	39.2	10.5
90°-100°	39.5	10.6
100°-110°	35.1	9.5
110°-120°	29.0	7.8
120°-130°	22.6	6.1
130°-140°	15.9	4.3
140°-150°	9.8	2.6
150°-160°	5.1	1.4
160°-170°	2.0	0.5
170°-180°	0.3	0.1
0°-30°	12.6	3.4
0°-40°	28.5	7.7
0°-60°	90.0	24.2
0°-90°	212.1	57.1
90°-120°	103.6	27.9
90°-150°	151.8	40.9
90°-180°	159.0	42.8
0°-180°	371.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4	
5°	5	1
15°	11	3
25°	19	9
35°	25	16
45°	31	24
55°	42	37
65°	45	44
75°	36	39
85°	36	29
90°	37	20
95°	36	29
105°	33	35
115°	29	29
125°	25	23
135°	20	16
145°	16	10
155°	11	5
165°	7	2
175°	2	0
180°	0	

TEST NUMBER: P1503507

CATALOG NUMBER: PRLX-SM4-01-LS-FS-010-XXXX-DIFF-VF (3000K-650LM)

CANDELA DISTRIBUTION (FULL):

0°	
0°	3.5
2.5°	3.7
5°	4.7
7.5°	6.2
10°	7.8
12.5°	9.5
15°	11.4
17.5°	13.0
20°	14.9
22.5°	16.7
25°	18.6
27.5°	20.4
30°	22.2
32.5°	23.9
35°	25.4
37.5°	26.8
40°	28.0
42.5°	29.3
45°	30.8
47.5°	32.9
50°	35.6
52.5°	38.8
55°	41.9
57.5°	44.2
60°	45.6
62.5°	45.8
65°	44.8
67.5°	42.8
70°	40.5
72.5°	38.3
75°	36.5
77.5°	35.7
80°	35.3
82.5°	35.5
85°	35.9
87.5°	36.2
90°	36.6
92.5°	36.7
95°	36.3
97.5°	35.9
100°	35.1
102.5°	34.2
105°	33.3
107.5°	32.1
110°	31.1

TEST NUMBER: P1503507

CATALOG NUMBER: PRLX-SM4-01-LS-FS-010-XXXX-DIFF-VF (3000K-650LM)

CANDELA DISTRIBUTION (continued):

	0°
112.5°	30.2
115°	29.2
117.5°	28.3
120°	27.3
122.5°	26.3
125°	25.1
127.5°	24.0
130°	22.8
132.5°	21.7
135°	20.5
137.5°	19.2
140°	17.9
142.5°	16.6
145°	15.5
147.5°	14.2
150°	13.0
152.5°	11.9
155°	10.8
157.5°	9.8
160°	8.9
162.5°	7.8
165°	7.0
167.5°	6.0
170°	5.0
172.5°	3.8
175°	2.0
177.5°	0.1
180°	0.0

(END OF REPORT)