

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503583

Luminaire Tested: PRLX-SM4-02-LS-FS-010-XXXX-BRNZ-XX (3000K-800LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503583
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-5)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-02-LS-FS-010-XXXX-BRNZ-XX (3000K-800LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, RING, BRONZE REFLECTOR
LIGHT LEVEL 2 - 800 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 3000K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 56.4 lumens
Efficiency: N/A
Efficacy: 6.8 lumens/watt
Spacing Criteria (0/90/45): 2.04 / 2.04 / 1.66
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 8.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503583

CATALOG NUMBER: PRLX-SM4-02-LS-FS-010-XXXX-BRNZ-XX (3000K-800LM)

Luminous Intensity Polar Plot

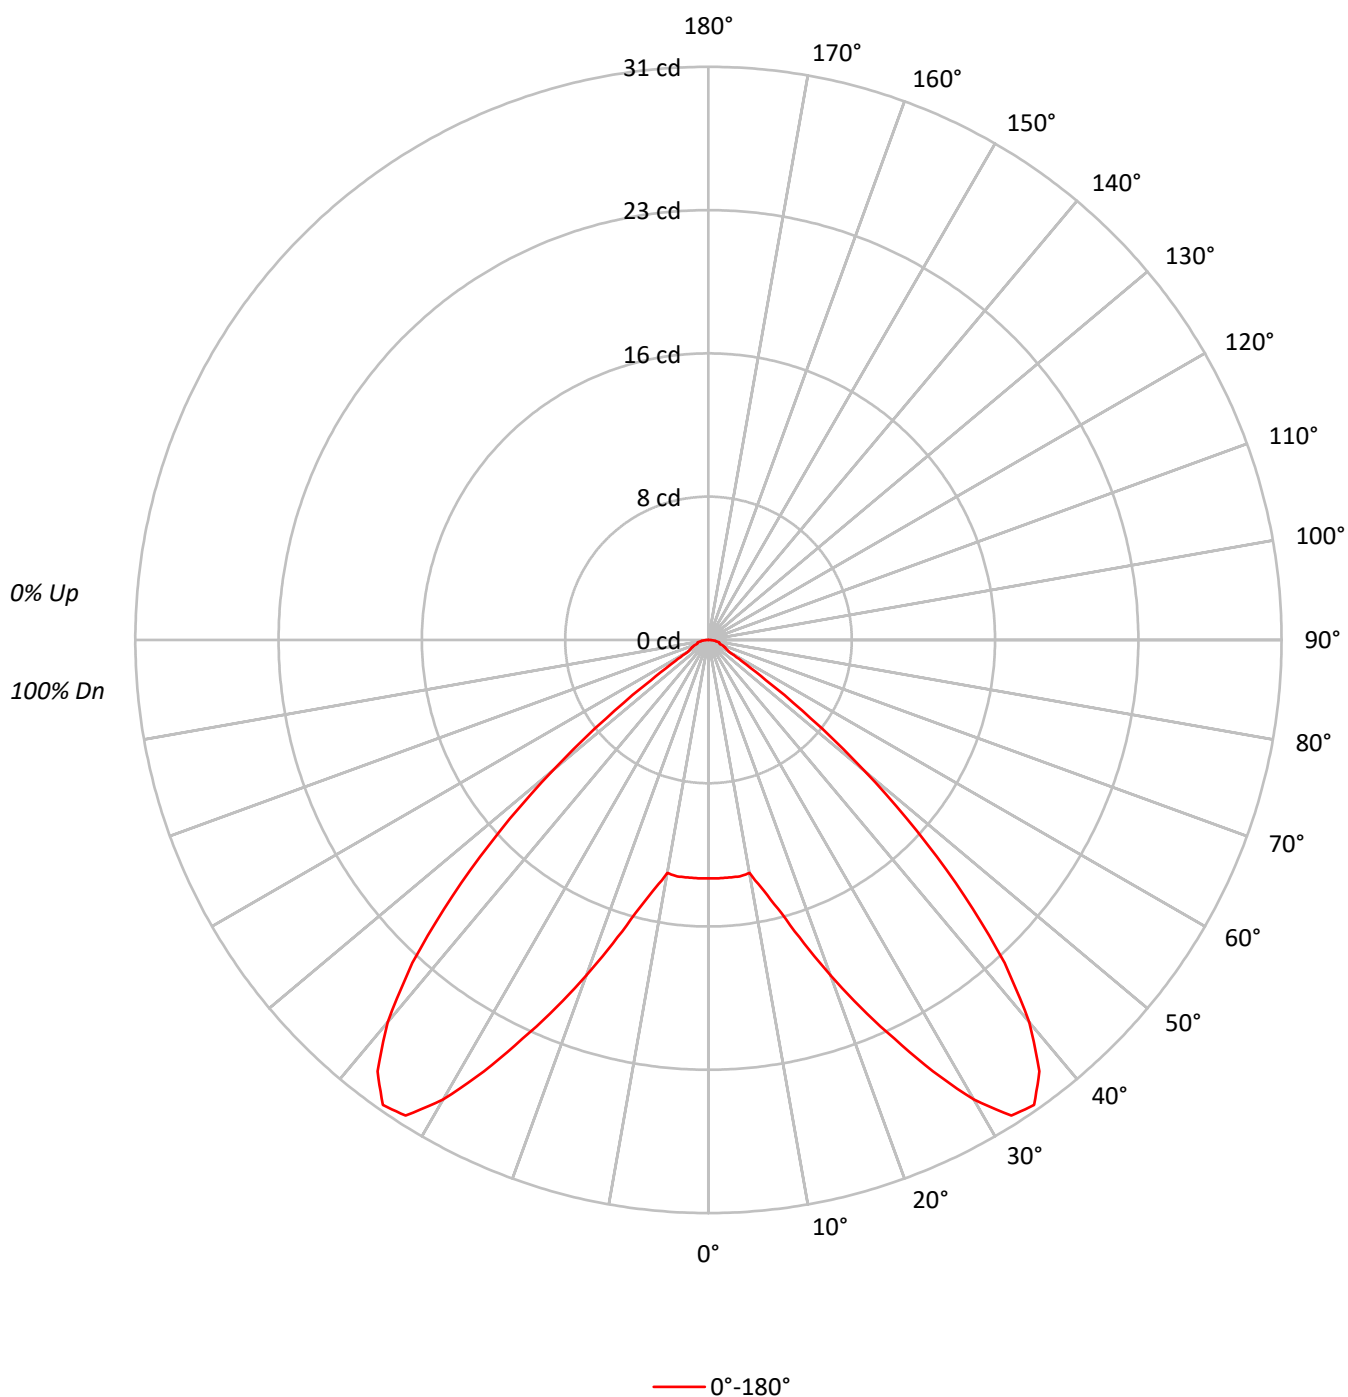



TEST NUMBER: P1503583

CATALOG NUMBER: PRLX-SM4-02-LS-FS-010-XXXX-BRNZ-XX (3000K-800LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	108	104	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89			
2	103	97	91	87	101	95	90	86	92	88	84	89	85	82	86	83	80	78			
3	96	87	80	75	94	86	79	74	83	77	73	80	76	72	78	74	71	69			
4	89	78	71	65	86	77	70	65	75	69	64	73	67	63	71	66	62	60			
5	82	71	63	57	80	70	62	57	68	61	56	66	60	56	64	59	55	53			
6	76	64	56	50	74	63	55	50	61	55	50	60	54	49	58	53	49	47			
7	70	58	50	44	69	57	50	44	56	49	44	54	48	44	53	48	43	42			
8	65	53	45	39	64	52	45	39	51	44	39	50	43	39	48	43	39	37			
9	61	48	40	35	59	48	40	35	46	40	35	45	39	35	44	39	35	33			
10	57	44	37	32	55	44	36	31	43	36	31	42	36	31	41	35	31	29			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	398
5°	399
10°	401
15°	488
20°	633
25°	810
30°	1022
35°	1156
40°	1087
45°	855
50°	528
55°	204
60°	80
65°	73
70°	63
75°	71
80°	71
85°	71

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 855 cd/sqm

TEST NUMBER: P1503583

CATALOG NUMBER: PRLX-SM4-02-LS-FS-010-XXXX-BRNZ-XX (3000K-800LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1.2	2.2
10°-20°	4.5	8.0
20°-30°	11.2	19.8
30°-40°	18.6	32.9
40°-50°	14.9	26.3
50°-60°	4.2	7.4
60°-70°	1.0	1.8
70°-80°	0.6	1.1
80°-90°	0.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	16.9	30.0
0°-40°	35.5	63.0
0°-60°	54.6	96.7
0°-90°	56.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	56.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13	
5°	13	1
15°	15	5
25°	24	11
35°	31	19
45°	20	15
55°	4	4
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1503583

CATALOG NUMBER: PRLX-SM4-02-LS-FS-010-XXXX-BRNZ-XX (3000K-800LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	12.9
2.5°	12.9
5°	12.9
7.5°	12.9
10°	12.8
12.5°	13.9
15°	15.3
17.5°	17.2
20°	19.3
22.5°	21.5
25°	23.8
27.5°	26.3
30°	28.7
32.5°	30.5
35°	30.7
37.5°	29.4
40°	27.0
42.5°	23.7
45°	19.6
47.5°	15.3
50°	11.0
52.5°	7.0
55°	3.8
57.5°	2.1
60°	1.3
62.5°	1.1
65°	1.0
67.5°	0.9
70°	0.7
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.1
90°	0.0

(END OF REPORT)