

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503699

Luminaire Tested: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (2700K-650LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503699
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-11)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (2700K-650LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, DISC, OPEN TAPERED, BRONZE REFLECTOR
LIGHT LEVEL 1 - 650 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 2700K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 316.6 lumens
Efficiency: N/A
Efficacy: 48.0 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.14
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 6.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503699

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (2700K-650LM)

Luminous Intensity Polar Plot

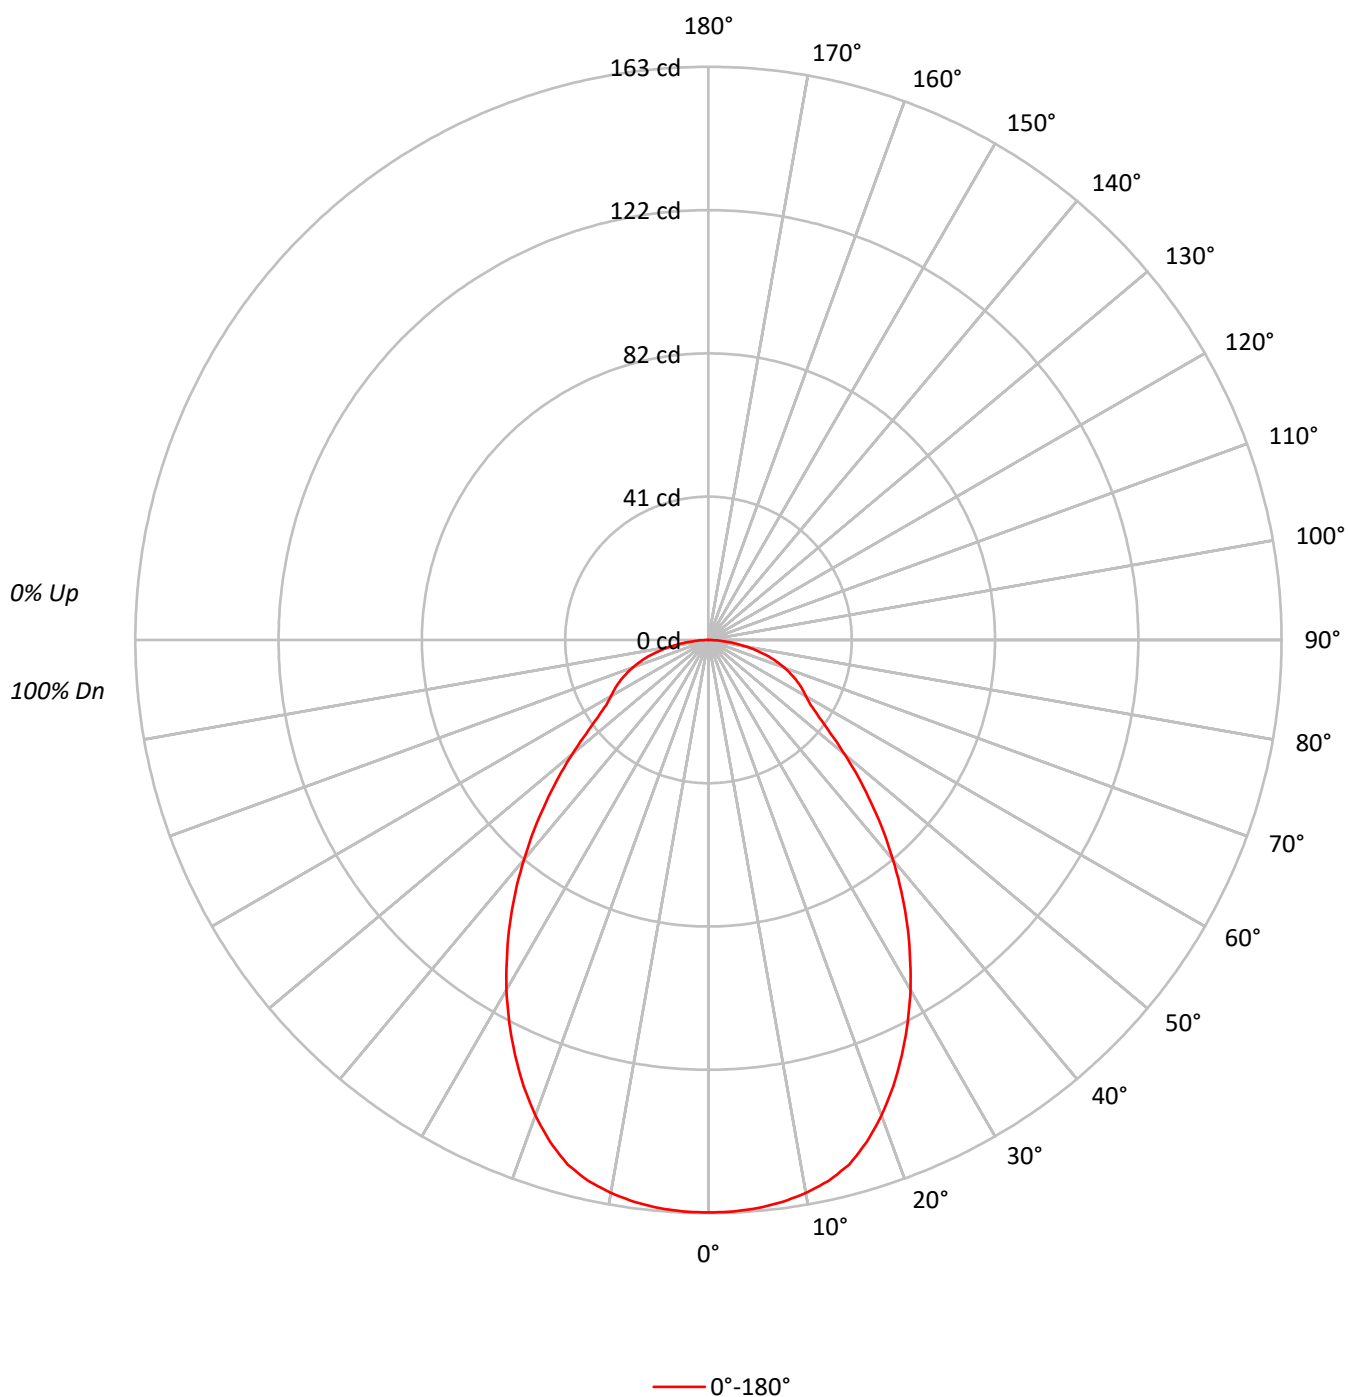



TEST NUMBER: P1503699

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (2700K-650LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	110	105	102	98	107	103	100	96	99	96	93	95	93	91	92	90	88	86		
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74		
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	70	66	64		
4	86	75	67	61	84	74	66	60	71	65	60	69	63	59	67	62	58	56		
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50		
6	74	62	54	48	72	61	53	48	59	52	47	58	52	47	56	51	46	45		
7	69	57	49	43	68	56	48	43	55	48	43	53	47	42	52	46	42	40		
8	65	52	44	39	63	52	44	39	50	44	39	49	43	38	48	42	38	36		
9	61	48	41	36	60	48	41	35	47	40	35	46	40	35	45	39	35	33		
10	57	45	38	33	56	45	37	33	44	37	32	43	37	32	42	36	32	31		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	5020
5°	5021
10°	5001
15°	4932
20°	4722
25°	4430
30°	4091
35°	3708
40°	3285
45°	2848
50°	2423
55°	2070
60°	1974
65°	2028
70°	2065
75°	2061
80°	1953
85°	1698

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2848 cd/sqm

TEST NUMBER: P1503699

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (2700K-650LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.4	4.9
10°-20°	43.3	13.7
20°-30°	59.7	18.9
30°-40°	61.4	19.4
40°-50°	50.5	16.0
50°-60°	35.3	11.2
60°-70°	27.4	8.7
70°-80°	18.1	5.7
80°-90°	5.4	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	118.4	37.4
0°-40°	179.8	56.8
0°-60°	265.6	83.9
0°-90°	316.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	316.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	163	
5°	162	15
15°	154	43
25°	130	60
35°	98	61
45°	65	51
55°	38	35
65°	28	27
75°	17	18
85°	5	5
90°	0	

TEST NUMBER: P1503699

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (2700K-650LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	162.8
2.5°	162.7
5°	162.2
7.5°	161.2
10°	159.7
12.5°	157.6
15°	154.5
17.5°	149.7
20°	143.9
22.5°	137.4
25°	130.2
27.5°	122.7
30°	114.9
32.5°	106.7
35°	98.5
37.5°	90.1
40°	81.6
42.5°	73.5
45°	65.3
47.5°	57.8
50°	50.5
52.5°	43.9
55°	38.5
57.5°	34.5
60°	32.0
62.5°	30.0
65°	27.8
67.5°	25.4
70°	22.9
72.5°	20.2
75°	17.3
77.5°	14.2
80°	11.0
82.5°	7.8
85°	4.8
87.5°	1.8
90°	0.0

(END OF REPORT)