

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503713

Luminaire Tested: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (2700K-1000LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503713
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-9)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (2700K-1000LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, DISC, NO DIFFUSER, BRASS REFLECTOR
LIGHT LEVEL 3 - 1000 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 2700K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 748.3 lumens
Efficiency: N/A
Efficacy: 68.7 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.22 / 1.27
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 10.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503713

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (2700K-1000LM)

Luminous Intensity Polar Plot

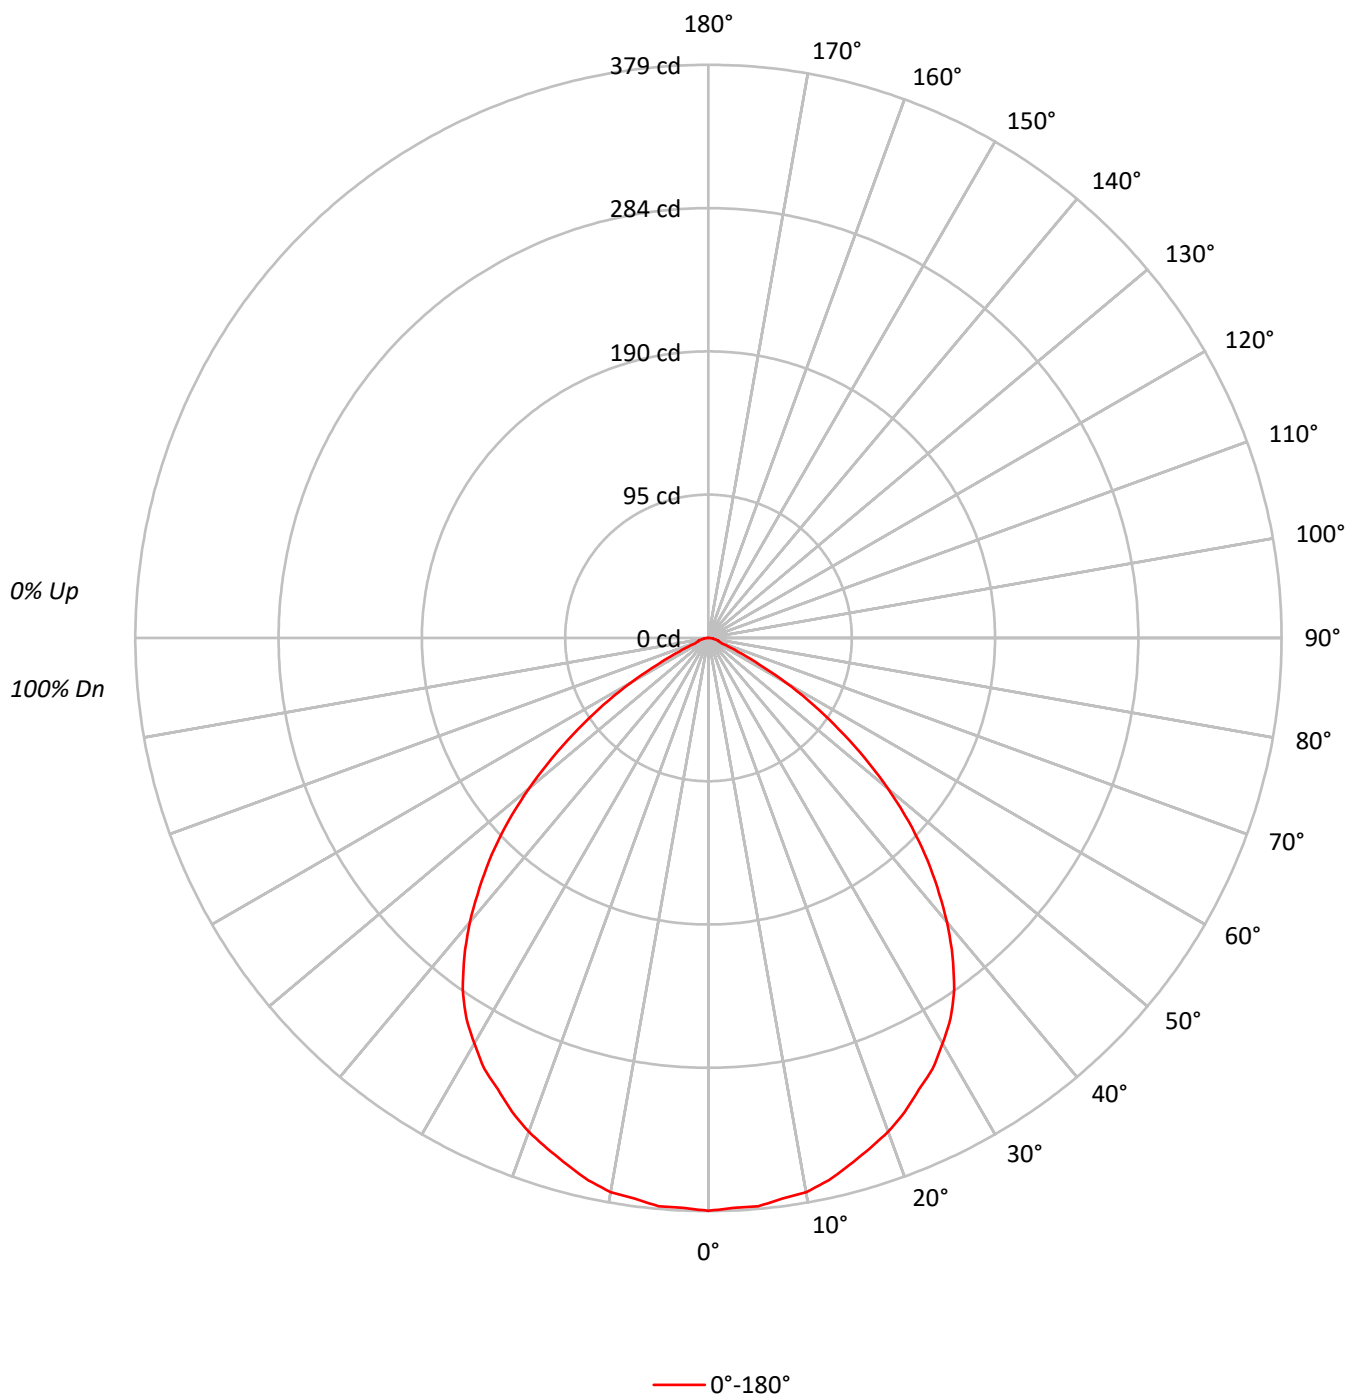

TEST NUMBER: P1503713

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (2700K-1000LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20				
RC	80				70					50					30				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	0
RCR																			
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90	
2	104	97	92	87	101	95	91	86	92	88	84	89	86	83	86	83	81	79	
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	70	
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	61	
5	83	72	64	58	81	71	64	58	69	62	58	67	61	57	65	60	56	55	
6	77	65	58	52	75	65	57	52	63	56	51	61	55	51	60	55	51	49	
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44	
8	67	55	47	42	66	54	47	42	53	46	42	52	46	42	51	45	41	40	
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36	
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	38	34	33	

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	11681
5°	11676
10°	11654
15°	11515
20°	11403
25°	11208
30°	11024
35°	10665
40°	9878
45°	8835
50°	7426
55°	5666
60°	3657
65°	1561
70°	739
75°	786
80°	586
85°	566

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8835 cd/sqm

TEST NUMBER: P1503713

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (2700K-1000LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.8	4.8
10°-20°	101.8	13.6
20°-30°	152.1	20.3
30°-40°	175.7	23.5
40°-50°	155.1	20.7
50°-60°	94.5	12.6
60°-70°	25.2	3.4
70°-80°	6.3	0.8
80°-90°	1.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	289.7	38.7
0°-40°	465.4	62.2
0°-60°	715.0	95.6
0°-90°	748.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	748.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	379	
5°	377	36
15°	361	102
25°	329	152
35°	283	176
45°	203	155
55°	105	94
65°	21	25
75°	7	6
85°	2	2
90°	0	

TEST NUMBER: P1503713

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (2700K-1000LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	378.8
2.5°	377.2
5°	377.2
7.5°	373.9
10°	372.2
12.5°	367.3
15°	360.7
17.5°	354.1
20°	347.5
22.5°	339.3
25°	329.4
27.5°	321.2
30°	309.6
32.5°	298.1
35°	283.3
37.5°	265.2
40°	245.4
42.5°	224.0
45°	202.6
47.5°	179.5
50°	154.8
52.5°	130.1
55°	105.4
57.5°	82.3
60°	59.3
62.5°	37.9
65°	21.4
67.5°	9.9
70°	8.2
72.5°	6.6
75°	6.6
77.5°	4.9
80°	3.3
82.5°	3.3
85°	1.6
87.5°	0.0
90°	0.0

(END OF REPORT)