

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503882

Luminaire Tested: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3000K-650LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503882
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-12)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3000K-650LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, DISC, OPEN TAPERED, BRASS REFLECTOR
LIGHT LEVEL 1 - 650 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 3000K CCT, 90 CRI - DIM TO WARM (1800K)
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 358.3 lumens
Efficiency: N/A
Efficacy: 51.9 lumens/watt
Spacing Criteria (0/90/45): 1.09 / 1.09 / 1.14
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 6.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503882

CATALOG NUMBER: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3000K-650LM)

Luminous Intensity Polar Plot

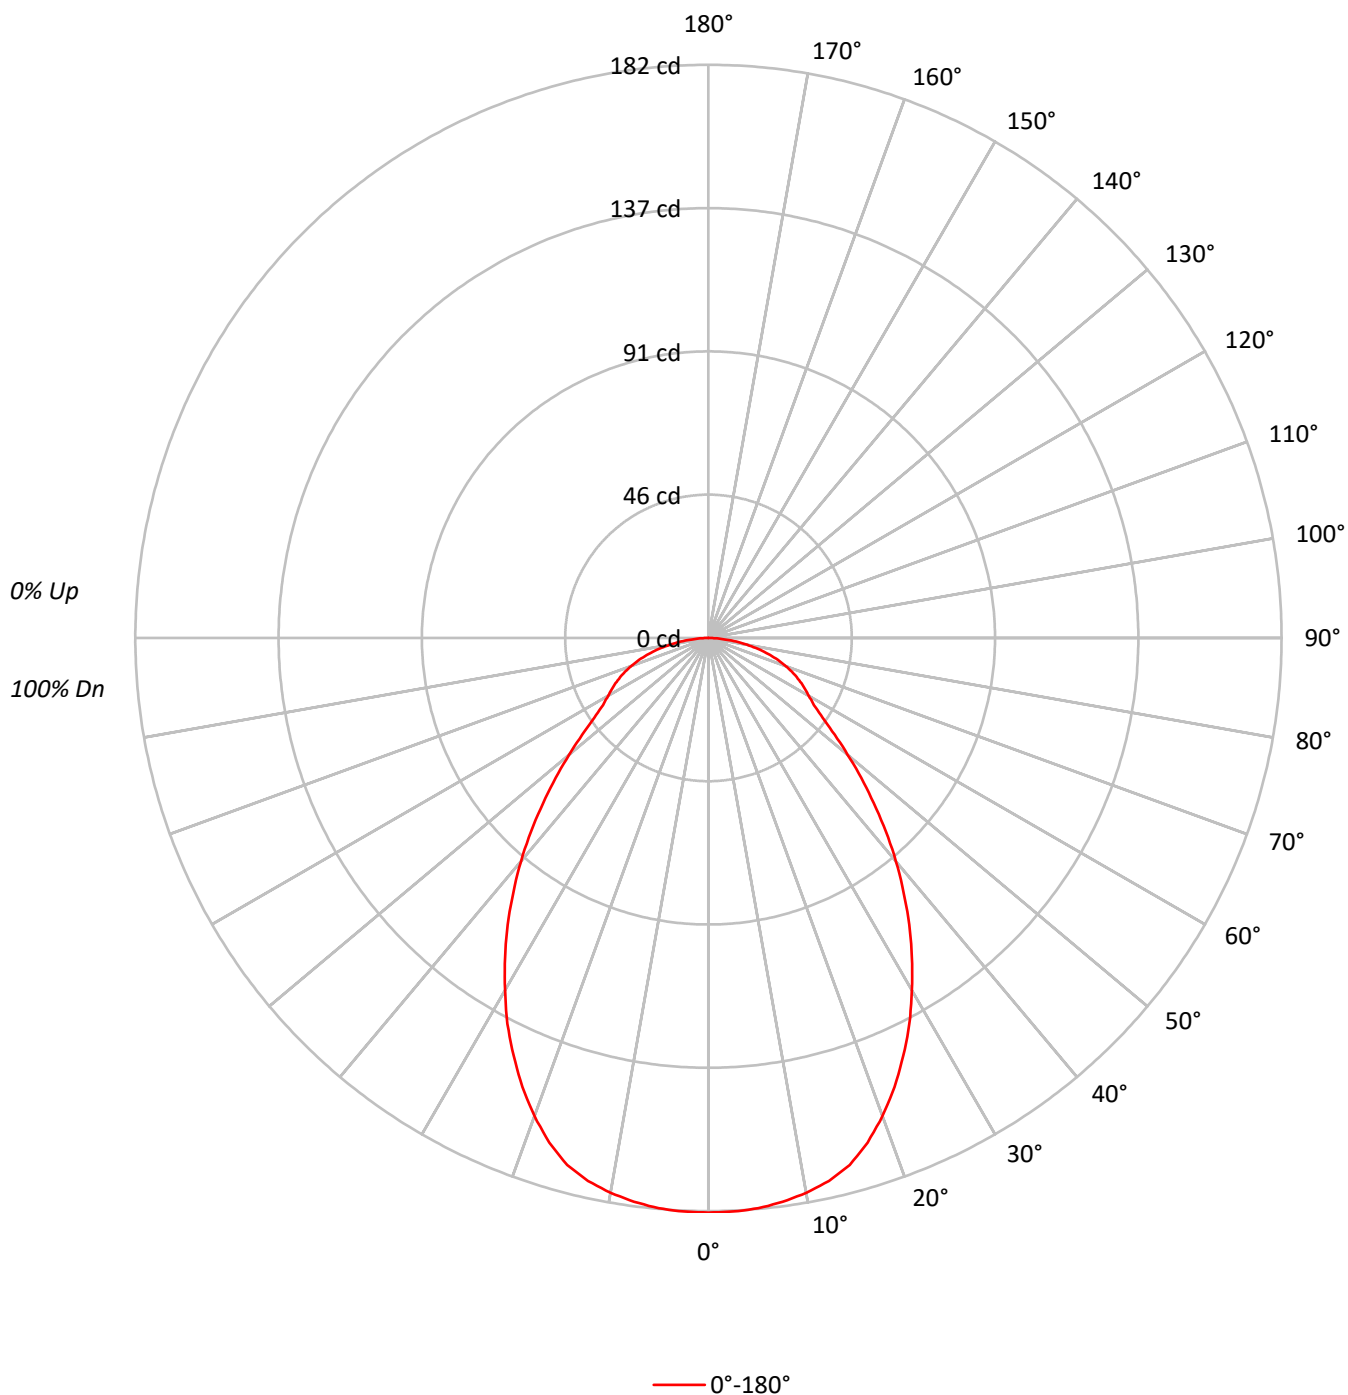



TEST NUMBER: P1503882

CATALOG NUMBER: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3000K-650LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	110	105	101	98	107	103	100	96	99	96	93	95	93	90	91	90	88	86		
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74		
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	69	66	64		
4	86	75	67	61	84	74	66	60	71	65	59	69	63	59	67	62	58	56		
5	80	68	60	53	78	67	59	53	65	58	53	63	57	52	61	56	52	50		
6	74	62	54	48	72	61	53	47	59	52	47	58	51	47	56	51	46	44		
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40		
8	65	52	44	39	63	51	44	39	50	43	38	49	43	38	48	42	38	36		
9	61	48	41	35	59	48	40	35	47	40	35	46	39	35	45	39	35	33		
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	42	36	32	30		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	5628
5°	5627
10°	5602
15°	5532
20°	5303
25°	4981
30°	4600
35°	4182
40°	3728
45°	3236
50°	2768
55°	2376
60°	2270
65°	2320
70°	2353
75°	2335
80°	2202
85°	1875

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3236 cd/sqm

TEST NUMBER: P1503882

CATALOG NUMBER: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3000K-650LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	17.3	4.8
10°-20°	48.5	13.5
20°-30°	67.2	18.7
30°-40°	69.3	19.3
40°-50°	57.4	16.0
50°-60°	40.6	11.3
60°-70°	31.4	8.8
70°-80°	20.6	5.7
80°-90°	6.1	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	133.0	37.1
0°-40°	202.2	56.4
0°-60°	300.2	83.8
0°-90°	358.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	358.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	182	
5°	182	17
15°	173	49
25°	146	67
35°	111	69
45°	74	57
55°	44	41
65°	32	31
75°	20	21
85°	5	6
90°	0	

TEST NUMBER: P1503882

CATALOG NUMBER: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3000K-650LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	182.5
2.5°	182.3
5°	181.8
7.5°	180.6
10°	178.9
12.5°	176.6
15°	173.3
17.5°	168.0
20°	161.6
22.5°	154.3
25°	146.4
27.5°	138.2
30°	129.2
32.5°	120.2
35°	111.1
37.5°	101.8
40°	92.6
42.5°	83.4
45°	74.2
47.5°	65.8
50°	57.7
52.5°	50.5
55°	44.2
57.5°	39.7
60°	36.8
62.5°	34.3
65°	31.8
67.5°	29.1
70°	26.1
72.5°	23.1
75°	19.6
77.5°	16.1
80°	12.4
82.5°	8.9
85°	5.3
87.5°	2.1
90°	0.0

(END OF REPORT)