

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503705

Luminaire Tested: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (3500K-650LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503705
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-11)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (3500K-650LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, DISC, OPEN TAPERED, BRONZE REFLECTOR
LIGHT LEVEL 1 - 650 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 3500K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 307.5 lumens
Efficiency: N/A
Efficacy: 47.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.14
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 6.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503705

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (3500K-650LM)

Luminous Intensity Polar Plot

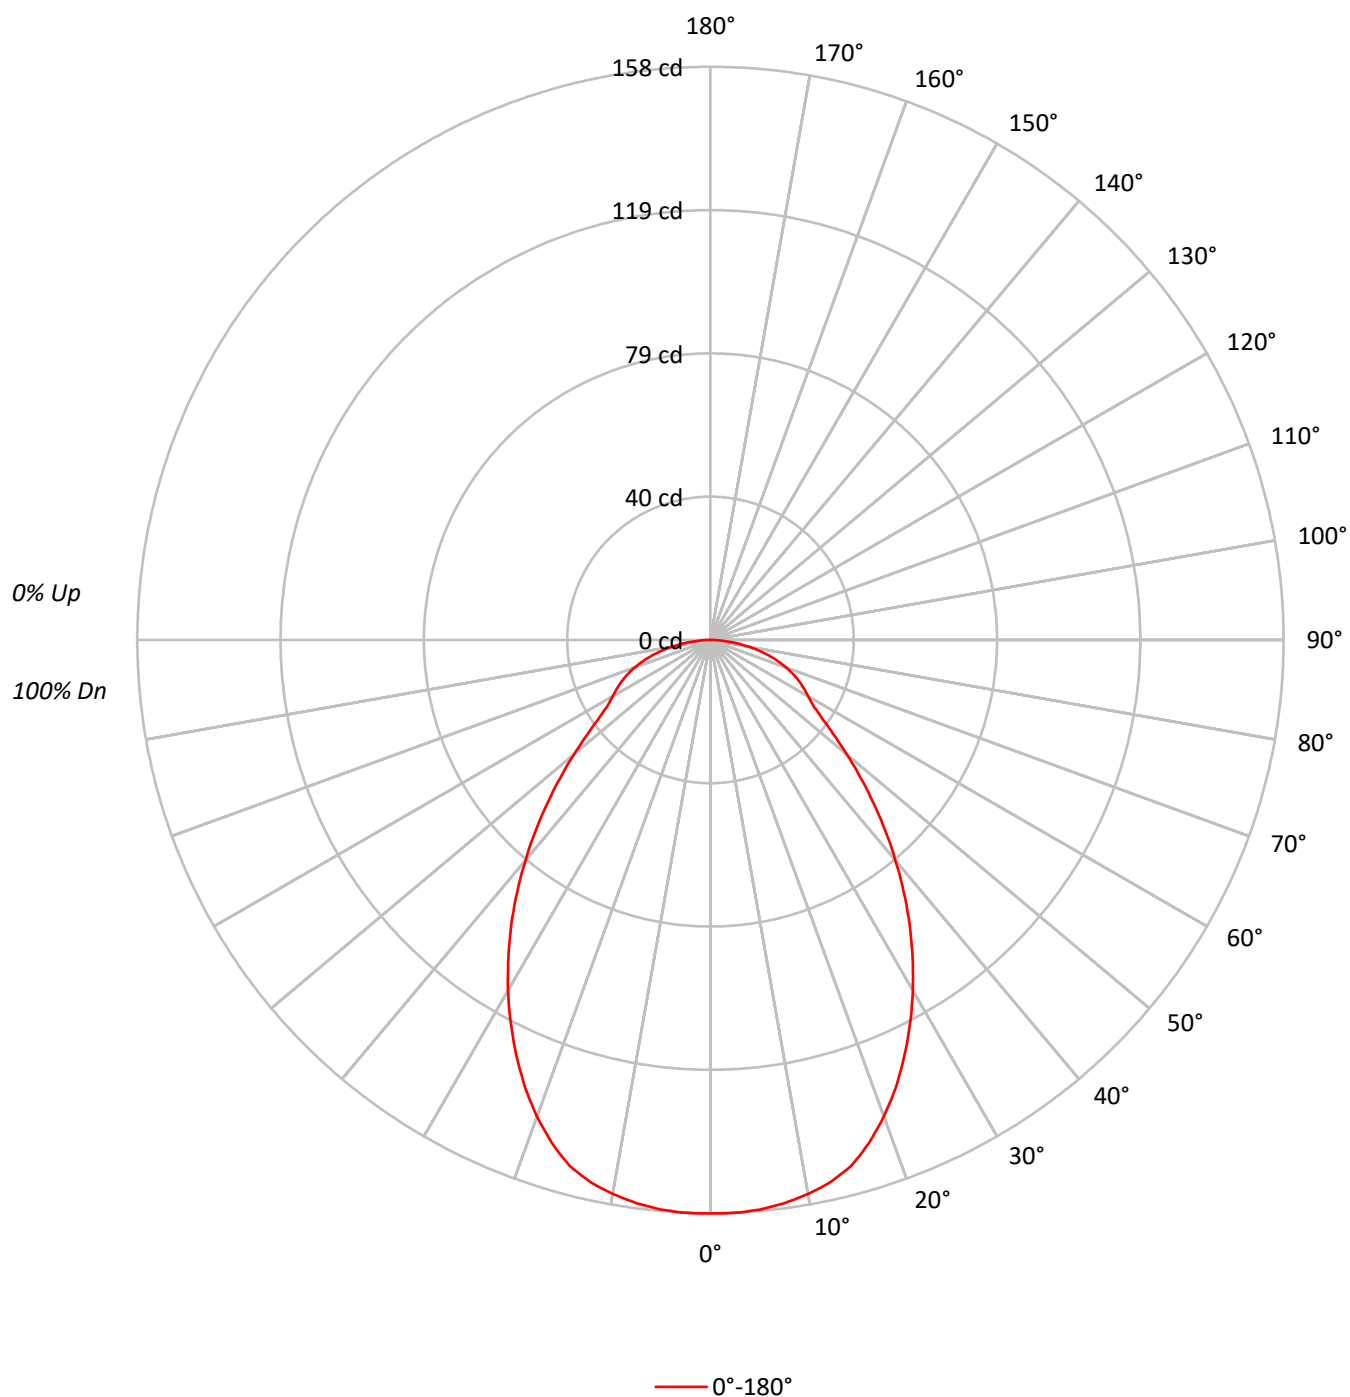



TEST NUMBER: P1503705

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (3500K-650LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20				
RC	80					70					50					30					10				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10		
RCR																									
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100							
1	110	105	102	98	107	103	100	96	99	96	93	95	93	91	92	90	88	86							
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74							
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	70	66	64							
4	86	75	67	61	84	74	66	60	71	65	60	69	63	59	67	62	58	56							
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50							
6	74	62	54	48	72	61	53	48	59	52	47	58	52	47	56	51	46	45							
7	69	57	49	43	68	56	48	43	55	48	43	53	47	42	52	46	42	40							
8	65	52	44	39	63	52	44	39	50	44	39	49	43	38	48	42	38	36							
9	61	48	41	36	60	48	41	35	47	40	35	46	40	35	45	39	35	33							
10	57	45	38	33	56	45	37	33	44	37	32	43	37	32	42	36	32	31							

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4875
5°	4878
10°	4856
15°	4792
20°	4588
25°	4304
30°	3974
35°	3603
40°	3192
45°	2765
50°	2355
55°	2011
60°	1918
65°	1970
70°	2002
75°	2002
80°	1900
85°	1663

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2765 cd/sqm

TEST NUMBER: P1503705

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (3500K-650LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.0	4.9
10°-20°	42.0	13.7
20°-30°	58.0	18.9
30°-40°	59.7	19.4
40°-50°	49.1	16.0
50°-60°	34.3	11.2
60°-70°	26.6	8.7
70°-80°	17.6	5.7
80°-90°	5.3	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	115.0	37.4
0°-40°	174.7	56.8
0°-60°	258.0	83.9
0°-90°	307.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	307.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	158	
5°	158	15
15°	150	42
25°	126	58
35°	96	60
45°	63	49
55°	37	34
65°	27	27
75°	17	18
85°	5	5
90°	0	

TEST NUMBER: P1503705

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRNZ-XX-OT (3500K-650LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	158.1
2.5°	158.1
5°	157.6
7.5°	156.6
10°	155.1
12.5°	153.1
15°	150.1
17.5°	145.4
20°	139.8
22.5°	133.5
25°	126.5
27.5°	119.2
30°	111.6
32.5°	103.7
35°	95.7
37.5°	87.5
40°	79.3
42.5°	71.4
45°	63.4
47.5°	56.1
50°	49.1
52.5°	42.6
55°	37.4
57.5°	33.5
60°	31.1
62.5°	29.1
65°	27.0
67.5°	24.7
70°	22.2
72.5°	19.6
75°	16.8
77.5°	13.8
80°	10.7
82.5°	7.6
85°	4.7
87.5°	1.7
90°	0.0

(END OF REPORT)