

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503884

Luminaire Tested: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3500K-1000LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503884
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-12)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3500K-1000LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, DISC, OPEN TAPERED, BRASS REFLECTOR
LIGHT LEVEL 3 - 1000 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 3500K CCT, 90 CRI - DIM TO WARM (1800K)
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 587.5 lumens
Efficiency: N/A
Efficacy: 51.1 lumens/watt
Spacing Criteria (0/90/45): 1.09 / 1.09 / 1.14
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 11.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503884

CATALOG NUMBER: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3500K-1000LM)

Luminous Intensity Polar Plot

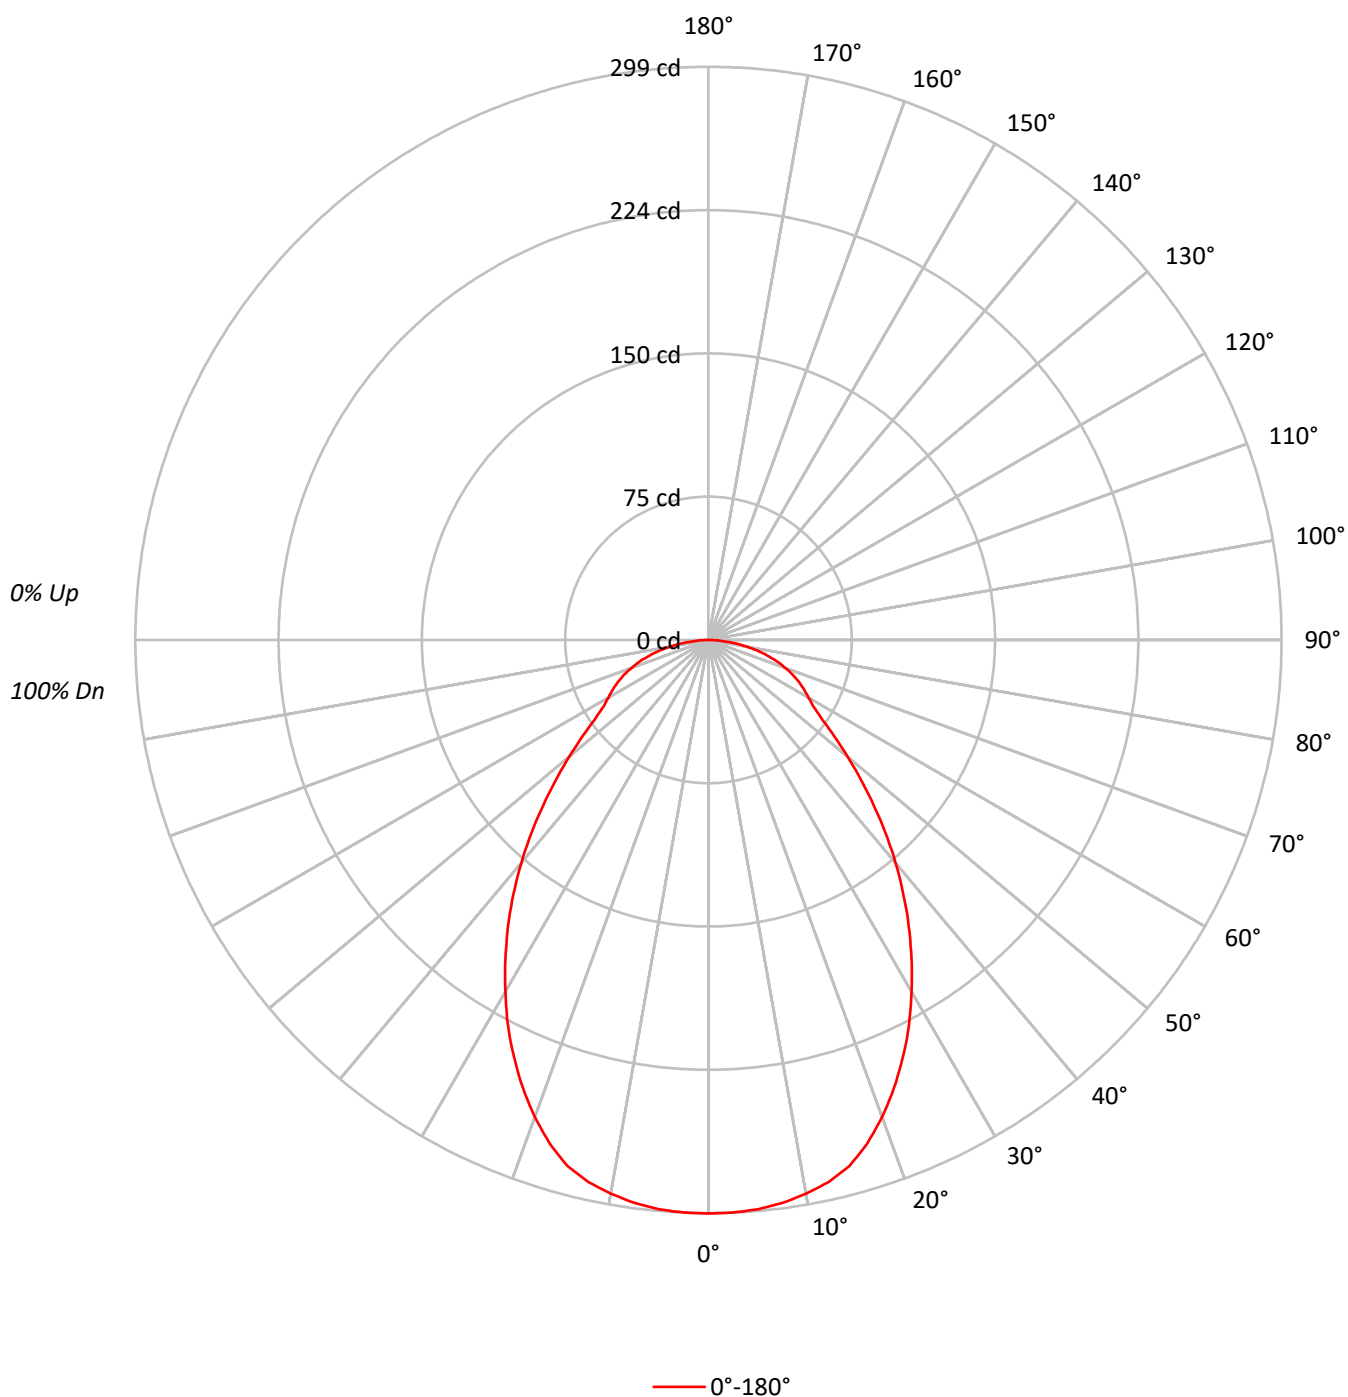



TEST NUMBER: P1503884

CATALOG NUMBER: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3500K-1000LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	105	101	98	107	103	100	96	99	96	93	95	93	90	91	90	88	86			
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74			
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	69	66	64			
4	86	75	67	61	84	74	66	60	71	65	59	69	63	59	67	62	58	56			
5	80	68	60	53	78	67	59	53	65	58	53	63	57	52	61	56	52	50			
6	74	62	54	48	72	61	53	47	59	52	47	58	51	47	56	51	46	44			
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40			
8	65	52	44	39	63	51	44	39	50	43	38	49	43	38	48	42	38	36			
9	61	48	41	35	59	48	40	35	47	40	35	46	39	35	45	39	35	33			
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	42	36	32	30			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	9226
5°	9227
10°	9184
15°	9070
20°	8693
25°	8169
30°	7545
35°	6859
40°	6115
45°	5307
50°	4538
55°	3892
60°	3719
65°	3809
70°	3859
75°	3824
80°	3623
85°	3078

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5307 cd/sqm

TEST NUMBER: P1503884

CATALOG NUMBER: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3500K-1000LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.3	4.8
10°-20°	79.5	13.5
20°-30°	110.2	18.7
30°-40°	113.6	19.3
40°-50°	94.2	16.0
50°-60°	66.5	11.3
60°-70°	51.4	8.8
70°-80°	33.7	5.7
80°-90°	10.0	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	218.0	37.1
0°-40°	331.6	56.4
0°-60°	492.3	83.8
0°-90°	587.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	587.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	299	
5°	298	28
15°	284	80
25°	240	110
35°	182	114
45°	122	94
55°	72	67
65°	52	51
75°	32	34
85°	9	10
90°	0	

TEST NUMBER: P1503884

CATALOG NUMBER: PRLX-SM4-03-LS-FS-D2W-XXXX-BRSS-XX-OT (3500K-1000LM)

CANDELA DISTRIBUTION (FULL):

0°	
0°	299.2
2.5°	299.0
5°	298.1
7.5°	296.2
10°	293.3
12.5°	289.6
15°	284.1
17.5°	275.4
20°	264.9
22.5°	253.0
25°	240.1
27.5°	226.6
30°	211.9
32.5°	197.1
35°	182.2
37.5°	167.0
40°	151.9
42.5°	136.8
45°	121.7
47.5°	107.9
50°	94.6
52.5°	82.9
55°	72.4
57.5°	65.1
60°	60.3
62.5°	56.3
65°	52.2
67.5°	47.7
70°	42.8
72.5°	37.8
75°	32.1
77.5°	26.4
80°	20.4
82.5°	14.6
85°	8.7
87.5°	3.4
90°	0.0

(END OF REPORT)