

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503723

Luminaire Tested: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-650LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503723
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-9)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-650LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, DISC, NO DIFFUSER, BRASS REFLECTOR
LIGHT LEVEL 1 - 650 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 4000K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 445.7 lumens
Efficiency: N/A
Efficacy: 68.6 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.22 / 1.27
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 6.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503723

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-650LM)

Luminous Intensity Polar Plot

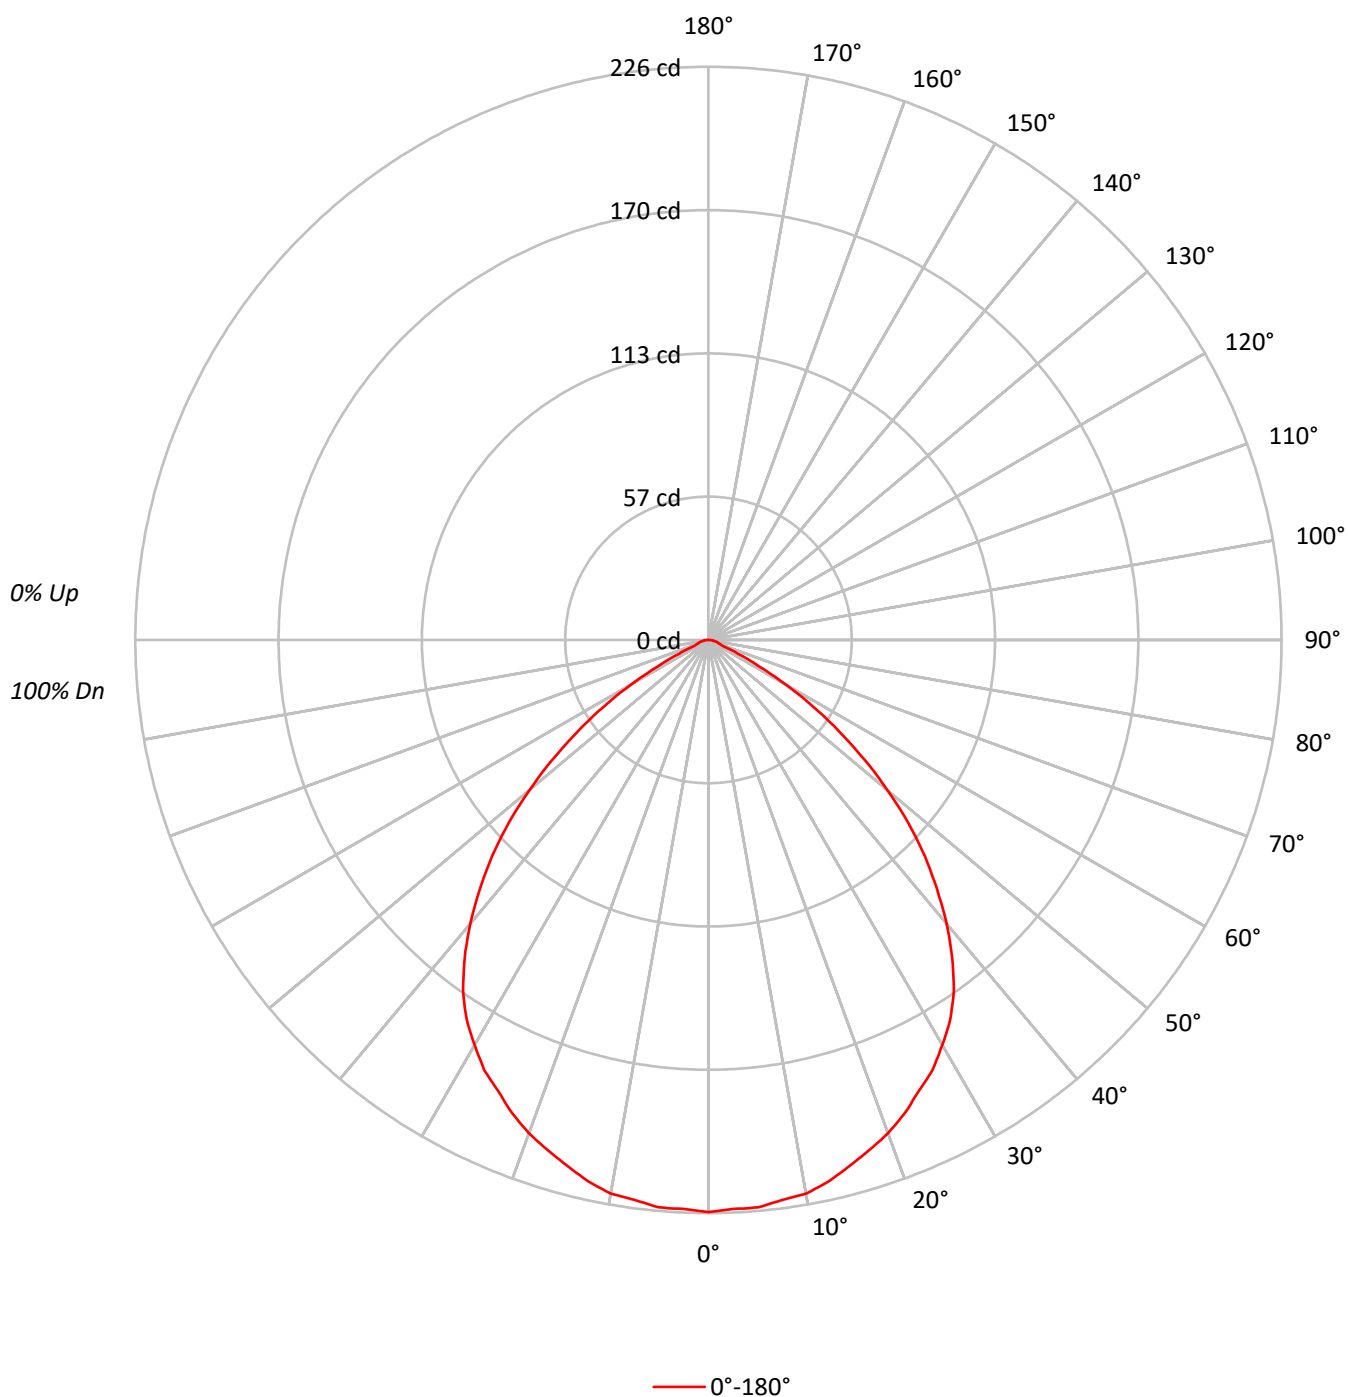

TEST NUMBER: P1503723

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-650LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102			100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91			90
2	104	97	92	87	101	95	91	86	92	88	84	89	86	83	86	83	81			79
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71			70
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63			61
5	83	72	64	58	81	71	64	58	69	62	58	67	61	57	65	60	56			55
6	77	65	58	52	75	65	57	52	63	56	51	61	55	51	60	55	51			49
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46			44
8	67	55	47	42	66	54	47	42	53	46	42	52	46	42	51	45	41			40
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38			36
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	38	34			33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	6957
5°	6952
10°	6942
15°	6857
20°	6793
25°	6676
30°	6566
35°	6351
40°	5885
45°	5264
50°	4423
55°	3376
60°	2177
65°	934
70°	442
75°	465
80°	355
85°	354

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5264 cd/sqm

TEST NUMBER: P1503723

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-650LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	21.3	4.8
10°-20°	60.6	13.6
20°-30°	90.6	20.3
30°-40°	104.7	23.5
40°-50°	92.4	20.7
50°-60°	56.3	12.6
60°-70°	15.0	3.4
70°-80°	3.7	0.8
80°-90°	1.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	172.5	38.7
0°-40°	277.2	62.2
0°-60°	425.9	95.5
0°-90°	445.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	445.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	226	
5°	225	21
15°	215	61
25°	196	91
35°	169	105
45°	121	92
55°	63	56
65°	13	15
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1503723

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-650LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	225.6
2.5°	224.6
5°	224.6
7.5°	222.7
10°	221.7
12.5°	218.7
15°	214.8
17.5°	210.9
20°	207.0
22.5°	202.1
25°	196.2
27.5°	191.3
30°	184.4
32.5°	177.5
35°	168.7
37.5°	157.9
40°	146.2
42.5°	133.4
45°	120.7
47.5°	106.9
50°	92.2
52.5°	77.5
55°	62.8
57.5°	49.0
60°	35.3
62.5°	22.6
65°	12.8
67.5°	5.9
70°	4.9
72.5°	3.9
75°	3.9
77.5°	2.9
80°	2.0
82.5°	2.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)