

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503724

Luminaire Tested: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-800LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503724
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-9)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-800LM)
Description: PrentaLux Fluxyn SM4 SURFACE MOUNT, DISC, NO DIFFUSER, BRASS REFLECTOR
LIGHT LEVEL 2 - 800 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 4000K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 565.7 lumens
Efficiency: N/A
Efficacy: 69.0 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.22 / 1.27
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct

Input Watts (W): 8.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503724

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-800LM)

Luminous Intensity Polar Plot

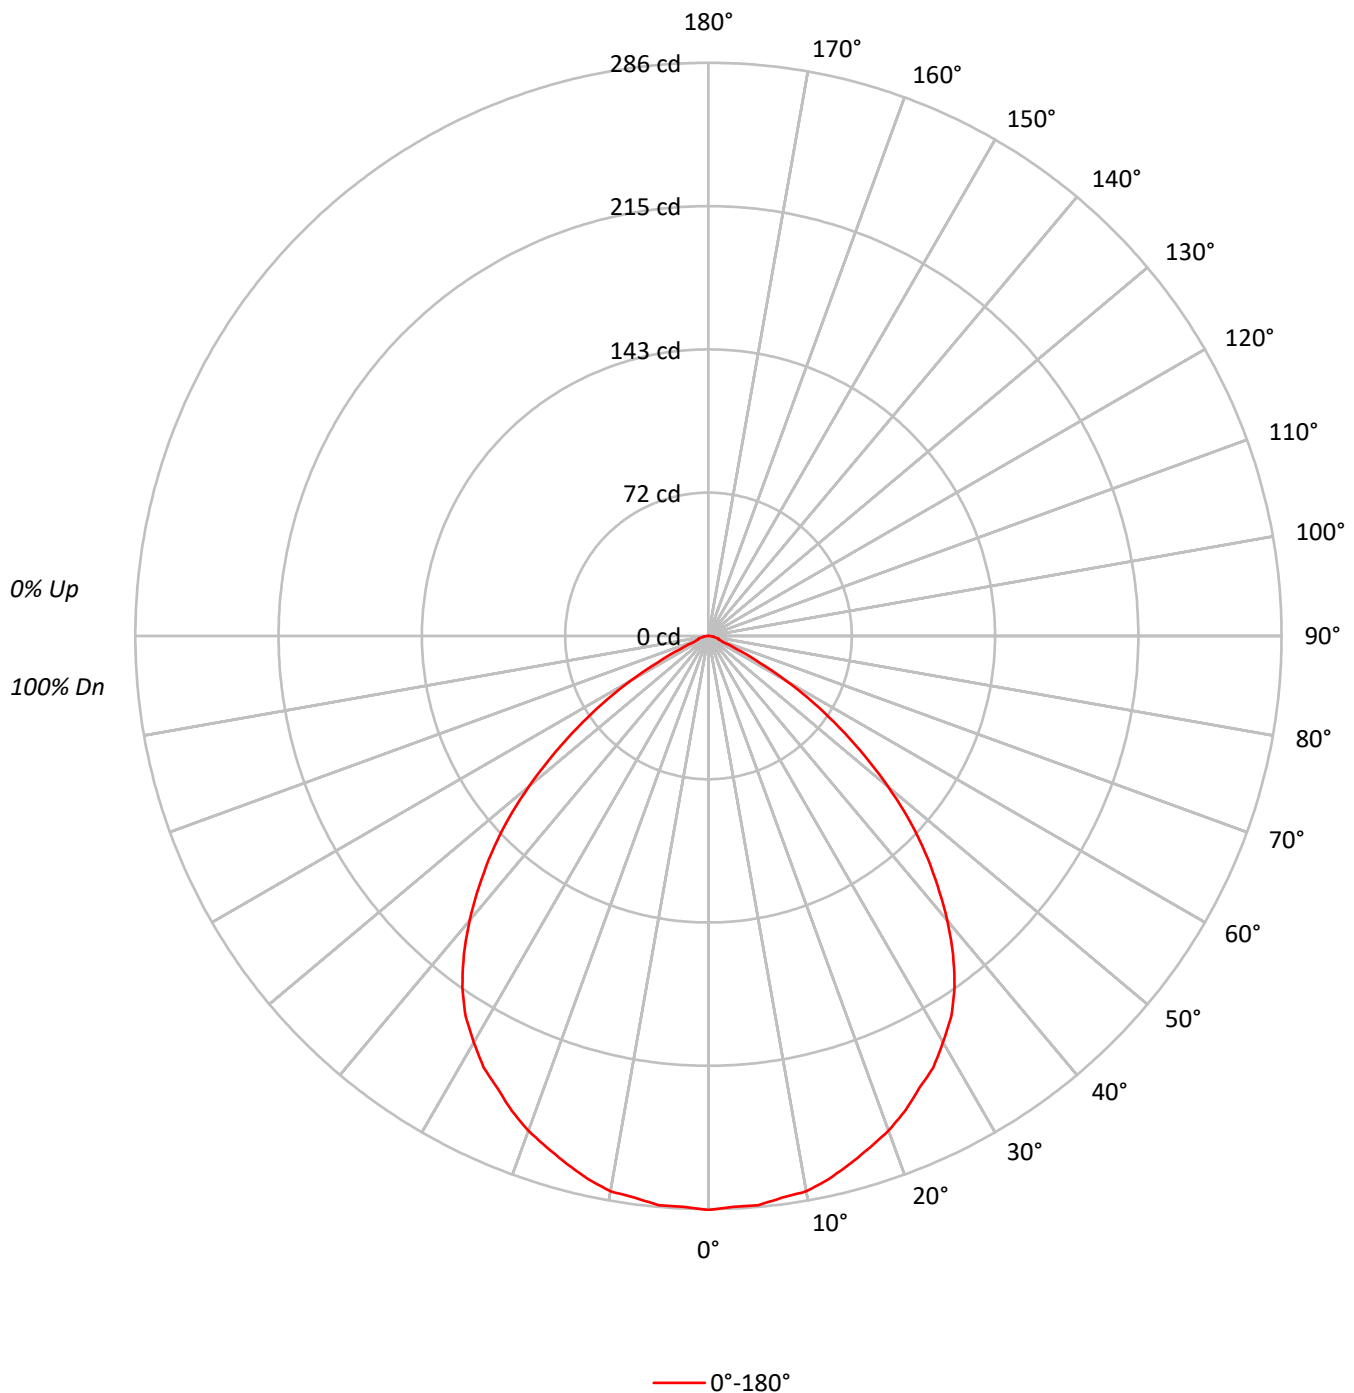



TEST NUMBER: P1503724

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-800LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90		
2	104	97	92	87	101	95	91	86	92	88	84	89	86	83	86	83	81	79		
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	70		
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	61		
5	83	72	64	58	81	71	64	58	69	62	58	67	61	57	65	60	56	55		
6	77	65	58	52	75	65	57	52	63	56	51	61	55	51	60	55	51	49		
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44		
8	67	55	47	42	66	54	47	42	53	46	42	52	46	42	51	45	41	40		
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36		
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	38	34	33		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	8832
5°	8825
10°	8811
15°	8706
20°	8621
25°	8472
30°	8336
35°	8060
40°	7467
45°	6677
50°	5613
55°	4285
60°	2763
65°	1182
70°	559
75°	596
80°	444
85°	425

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 6677 cd/sqm

TEST NUMBER: P1503724

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-800LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	27.1	4.8
10°-20°	77.0	13.6
20°-30°	115.0	20.3
30°-40°	132.9	23.5
40°-50°	117.3	20.7
50°-60°	71.4	12.6
60°-70°	19.1	3.4
70°-80°	4.8	0.8
80°-90°	1.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	219.0	38.7
0°-40°	351.8	62.2
0°-60°	540.5	95.6
0°-90°	565.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	565.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	286	
5°	285	27
15°	273	77
25°	249	115
35°	214	133
45°	153	117
55°	80	71
65°	16	19
75°	5	5
85°	1	1
90°	0	

TEST NUMBER: P1503724

CATALOG NUMBER: PRLX-SM4-03-LS-FS-010-XXXX-BRSS-XX-ND (4000K-800LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	286.4
2.5°	285.1
5°	285.1
7.5°	282.6
10°	281.4
12.5°	277.6
15°	272.7
17.5°	267.7
20°	262.7
22.5°	256.5
25°	249.0
27.5°	242.8
30°	234.1
32.5°	225.4
35°	214.1
37.5°	200.5
40°	185.5
42.5°	169.3
45°	153.1
47.5°	135.7
50°	117.0
52.5°	98.4
55°	79.7
57.5°	62.3
60°	44.8
62.5°	28.6
65°	16.2
67.5°	7.5
70°	6.2
72.5°	5.0
75°	5.0
77.5°	3.7
80°	2.5
82.5°	2.5
85°	1.2
87.5°	0.0
90°	0.0

(END OF REPORT)