

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504119

Luminaire Tested: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (2700K-750LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1504119
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-18)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (2700K-750LM)
Description: PrentaLux Fluxyn SM6 SURFACE MOUNT, DISC, NO DIFFUSER, BRASS REFLECTOR
LIGHT LEVEL 1 - 750 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 2700K CCT, 90 CRI - DIM TO WARM (1800K)
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 768.1 lumens
Efficiency: N/A
Efficacy: 97.2 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.36
Luminous Opening: Circular (Dia: 1.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1504119

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (2700K-750LM)

Luminous Intensity Polar Plot

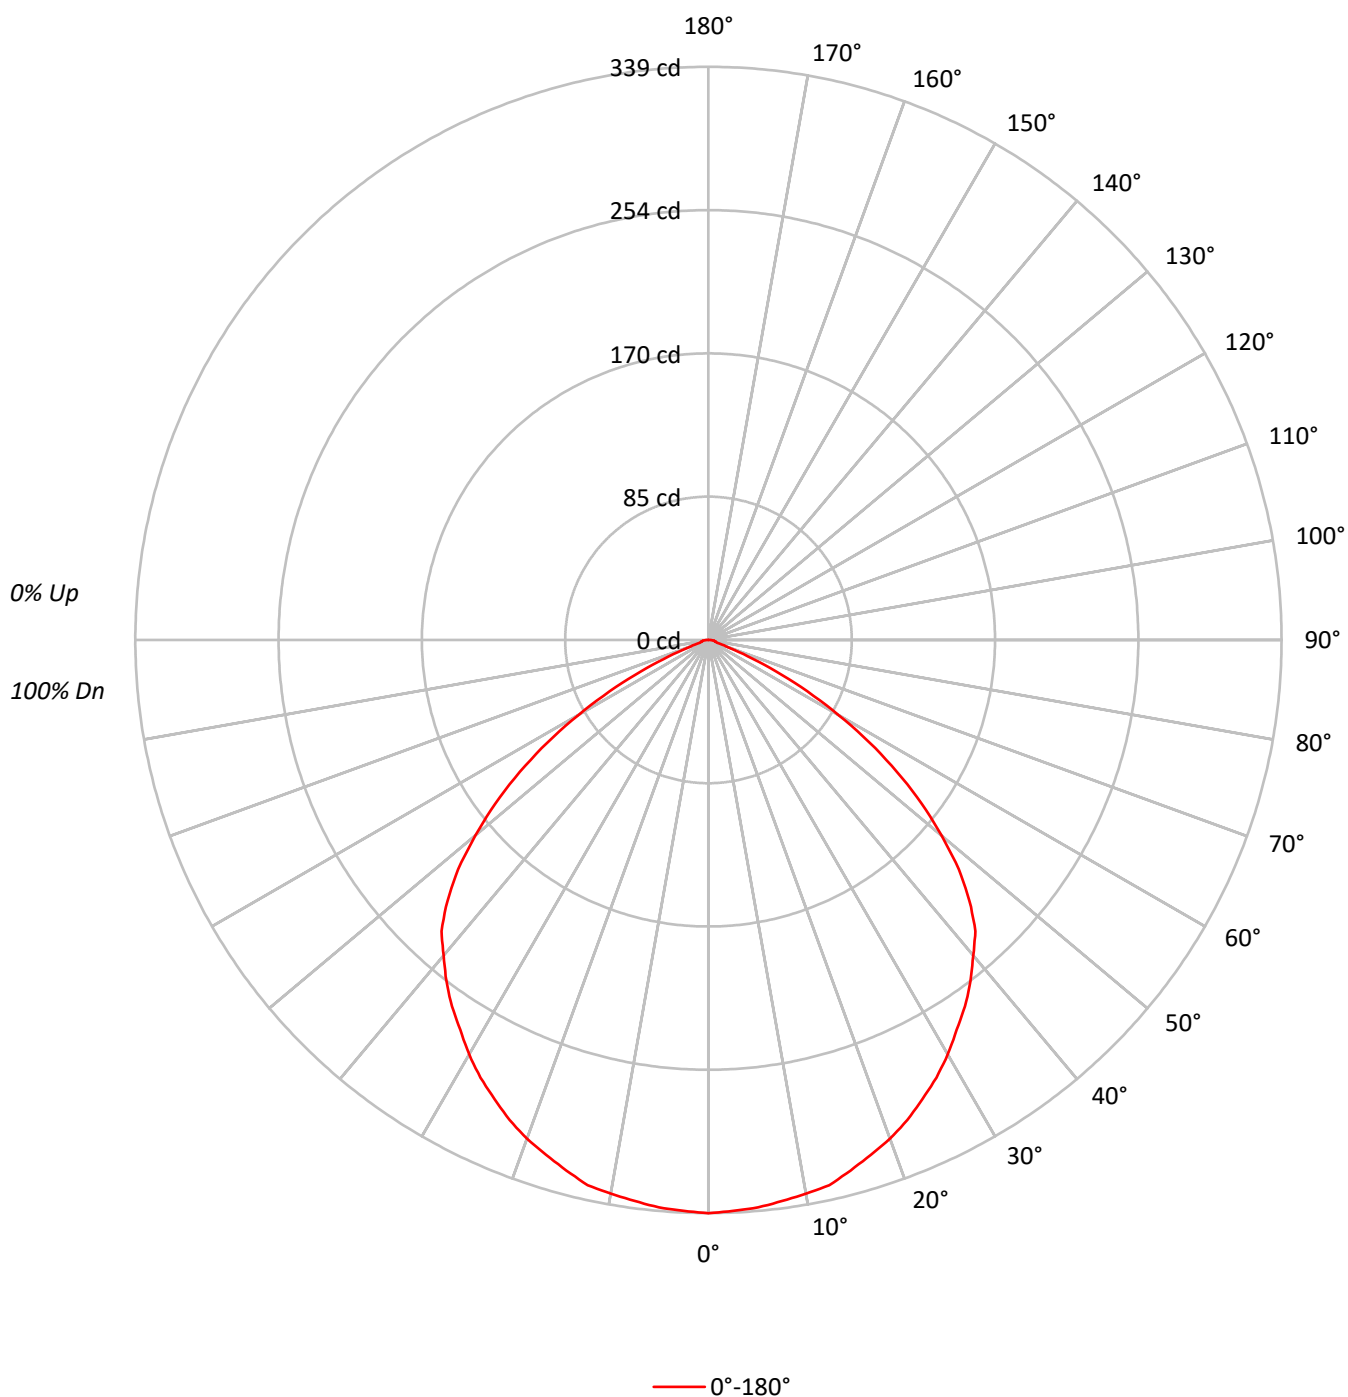



TEST NUMBER: P1504119

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (2700K-750LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	109	105	102	99	101	98	96	97	95	93	94	92	91	89			
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77			
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67			
4	87	77	69	63	85	76	68	63	73	67	62	71	66	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	54	64	58	54	63	57	53	51			
6	75	63	55	49	73	62	54	49	60	53	48	58	52	48	57	52	47	45			
7	70	57	49	43	68	56	49	43	55	48	43	53	47	43	52	47	42	40			
8	65	52	44	39	63	52	44	39	50	43	39	49	43	38	48	42	38	36			
9	61	48	40	35	59	47	40	35	46	40	35	45	39	35	44	39	35	33			
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	31	30			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3414
5°	3405
10°	3400
15°	3386
20°	3364
25°	3329
30°	3292
35°	3251
40°	3202
45°	3110
50°	2820
55°	2389
60°	1790
65°	1046
70°	324
75°	171
80°	191
85°	254

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3110 cd/sqm

TEST NUMBER: P1504119

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (2700K-750LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	32.0	4.2
10°-20°	91.7	11.9
20°-30°	138.1	18.0
30°-40°	165.3	21.5
40°-50°	166.7	21.7
50°-60°	120.9	15.7
60°-70°	45.4	5.9
70°-80°	5.7	0.7
80°-90°	2.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	261.8	34.1
0°-40°	427.1	55.6
0°-60°	714.8	93.1
0°-90°	768.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	768.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	339	
5°	337	32
15°	325	92
25°	300	138
35°	264	165
45°	218	167
55°	136	121
65°	44	45
75°	4	6
85°	2	2
90°	0	

TEST NUMBER: P1504119

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (2700K-750LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	339.1
2.5°	338.0
5°	336.9
7.5°	334.7
10°	332.5
12.5°	330.3
15°	324.8
17.5°	319.3
20°	313.9
22.5°	307.3
25°	299.6
27.5°	291.9
30°	283.1
32.5°	273.3
35°	264.5
37.5°	254.6
40°	243.6
42.5°	233.7
45°	218.4
47.5°	200.8
50°	180.0
52.5°	159.1
55°	136.1
57.5°	113.0
60°	88.9
62.5°	65.8
65°	43.9
67.5°	25.2
70°	11.0
72.5°	5.5
75°	4.4
77.5°	4.4
80°	3.3
82.5°	3.3
85°	2.2
87.5°	1.1
90°	0.0

(END OF REPORT)