

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503958

Luminaire Tested: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-OC (3000K-900LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503958
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-23)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-OC (3000K-900LM)
Description: PrentaLux Fluxyn SM6 SURFACE MOUNT, DISC, OPEN CYLINDER, BRONZE REFLECTOR
LIGHT LEVEL 2 - 900 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 3000K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 799.4 lumens
Efficiency: N/A
Efficacy: 94.0 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.18
Luminous Opening: Circular (Dia: 1.17' x H: 0')
CIE Type: Direct

Input Watts (W): 8.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503958

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-OC (3000K-900LM)

Luminous Intensity Polar Plot

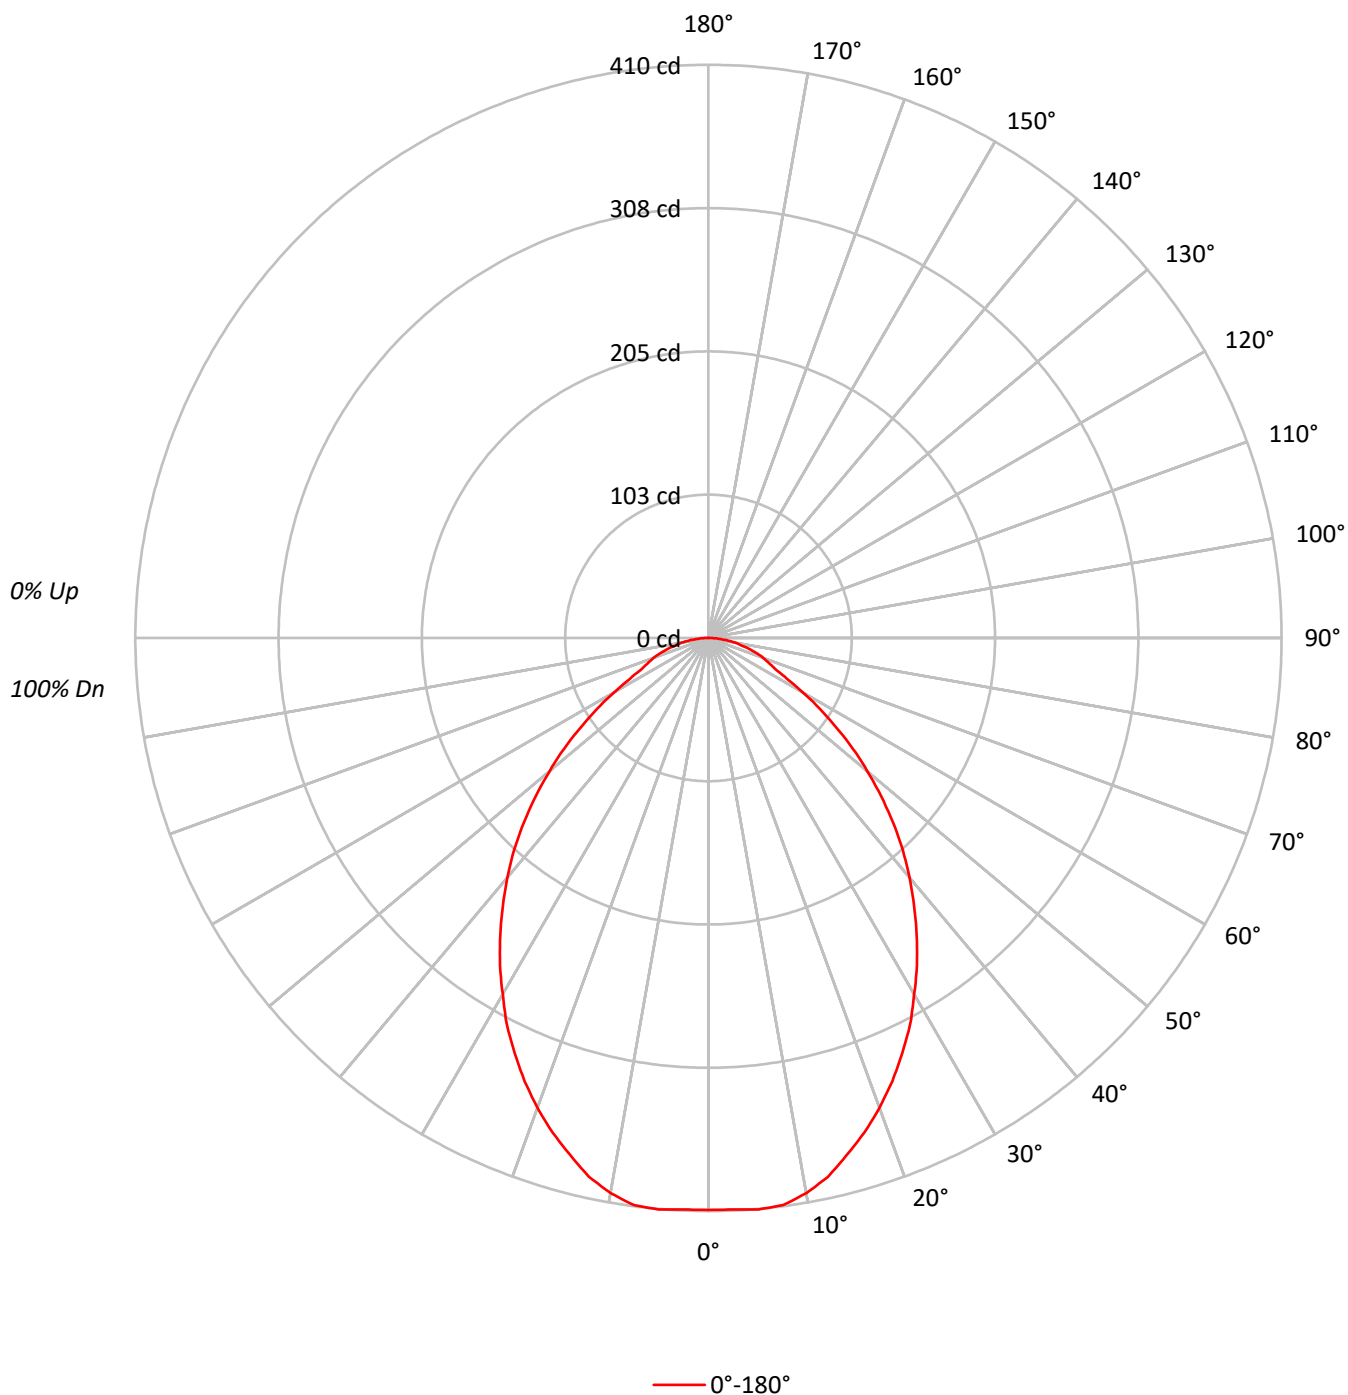



TEST NUMBER: P1503958

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-OC (3000K-900LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	92	91	89	87			
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75			
3	94	85	77	72	92	83	76	71	80	75	70	78	73	69	75	71	68	66			
4	87	76	68	62	85	75	68	62	73	66	61	70	65	60	68	63	60	58			
5	81	69	61	55	79	68	60	55	66	59	54	64	58	54	62	57	53	51			
6	75	63	55	49	73	62	54	49	60	53	48	59	53	48	57	52	47	46			
7	70	58	49	44	68	57	49	44	55	48	43	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	41	36	46	40	36	45	40	36	34			
10	58	45	38	33	57	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4120
5°	4148
10°	4122
15°	3990
20°	3833
25°	3642
30°	3422
35°	3191
40°	2940
45°	2657
50°	2325
55°	1954
60°	1567
65°	1253
70°	1234
75°	1163
80°	1108
85°	970

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2657 cd/sqm

TEST NUMBER: P1503958

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-OC (3000K-900LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.0	4.9
10°-20°	107.7	13.5
20°-30°	150.7	18.8
30°-40°	162.1	20.3
40°-50°	143.6	18.0
50°-60°	100.2	12.5
60°-70°	55.0	6.9
70°-80°	31.7	4.0
80°-90°	9.5	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	297.3	37.2
0°-40°	459.5	57.5
0°-60°	703.2	88.0
0°-90°	799.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	799.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	409	
5°	410	39
15°	383	108
25°	328	151
35°	260	162
45°	187	144
55°	111	100
65°	53	55
75°	30	32
85°	8	9
90°	0	

TEST NUMBER: P1503958

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-OC (3000K-900LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	409.2
2.5°	409.2
5°	410.4
7.5°	409.2
10°	403.2
12.5°	394.8
15°	382.8
17.5°	370.9
20°	357.7
22.5°	343.4
25°	327.8
27.5°	312.3
30°	294.3
32.5°	277.6
35°	259.6
37.5°	241.7
40°	223.7
42.5°	205.8
45°	186.6
47.5°	167.5
50°	148.4
52.5°	130.4
55°	111.3
57.5°	94.5
60°	77.8
62.5°	63.4
65°	52.6
67.5°	46.7
70°	41.9
72.5°	35.9
75°	29.9
77.5°	23.9
80°	19.1
82.5°	13.2
85°	8.4
87.5°	3.6
90°	0.0

(END OF REPORT)