

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1503945

Luminaire Tested: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-ND (3500K-750LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1503945
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-17)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-ND (3500K-750LM)
Description: PrentaLux Fluxyn SM6 SURFACE MOUNT, DISC, NO DIFFUSER, BRONZE REFLECTOR
LIGHT LEVEL 1 - 750 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 3500K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 673.2 lumens
Efficiency: N/A
Efficacy: 96.2 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.36
Luminous Opening: Circular (Dia: 1.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1503945

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-ND (3500K-750LM)

Luminous Intensity Polar Plot

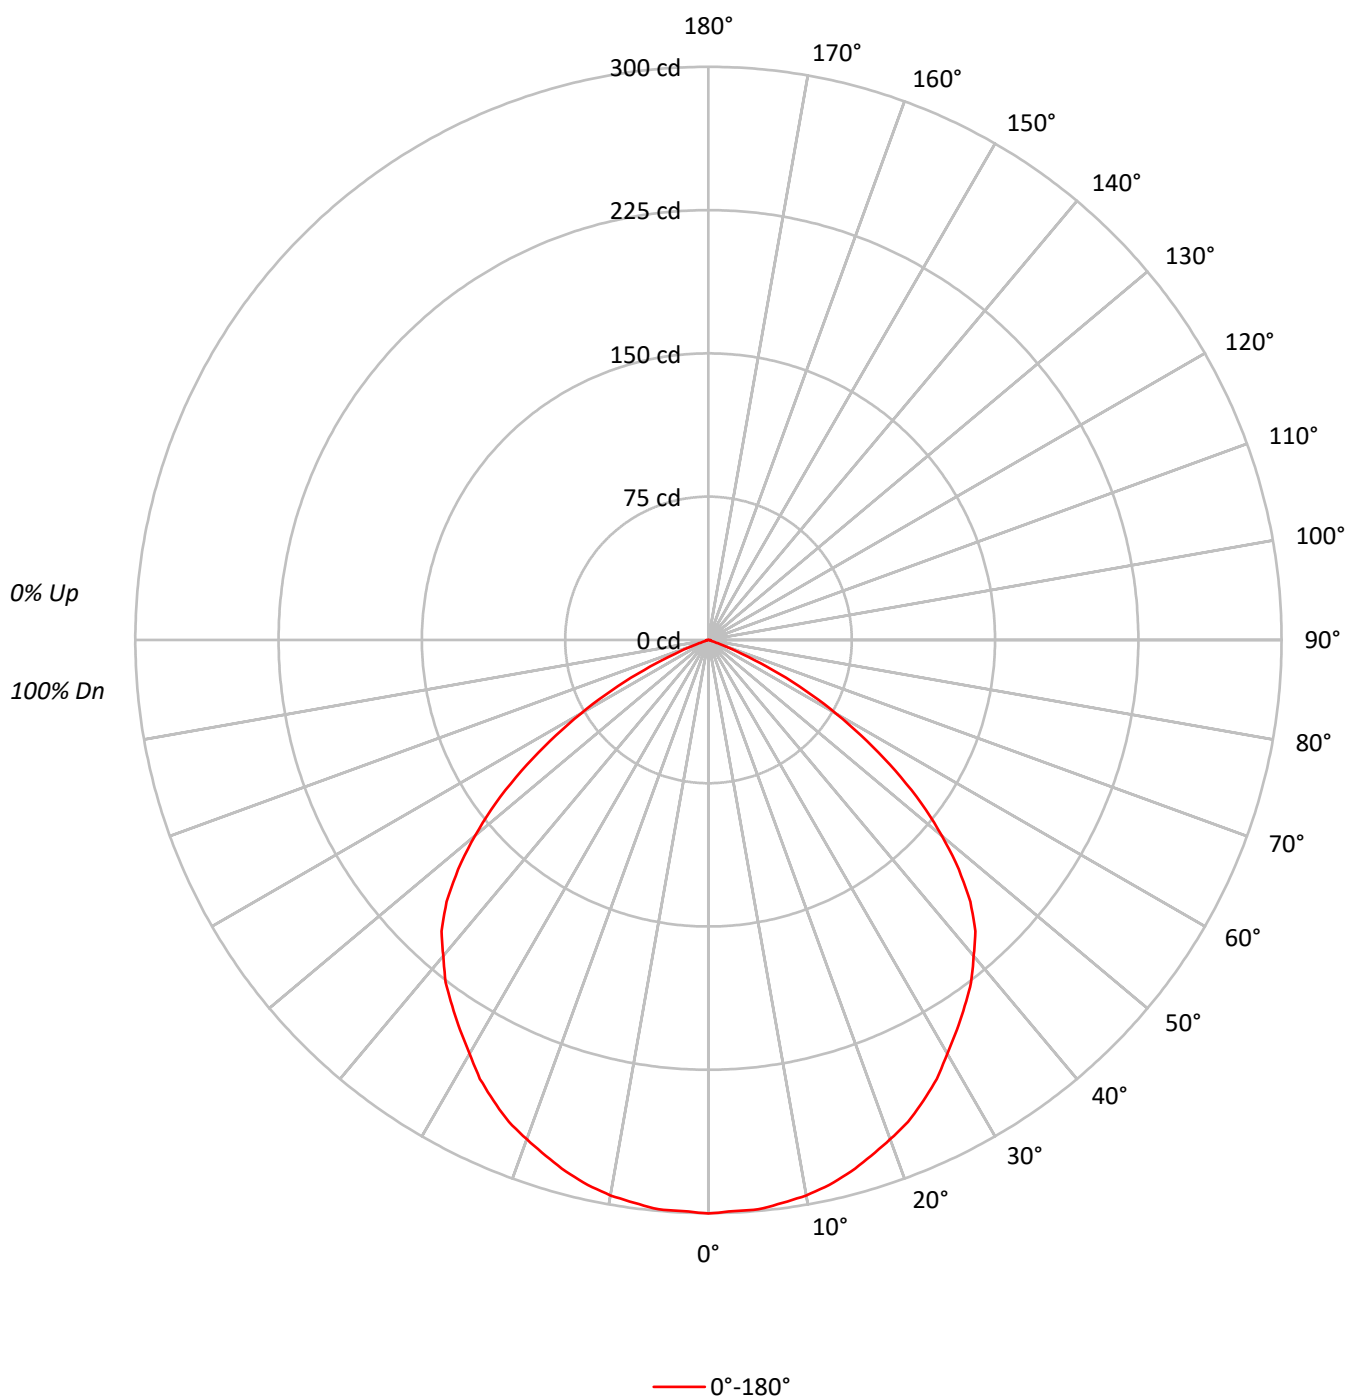



TEST NUMBER: P1503945

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-ND (3500K-750LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89			
2	103	96	91	86	101	94	89	85	91	87	83	88	84	81	85	82	80	78			
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	69	68			
4	88	77	70	64	86	76	69	63	74	67	63	71	66	62	69	65	61	59			
5	81	70	62	56	79	69	61	55	67	60	55	65	59	54	63	58	54	52			
6	75	63	55	49	73	62	55	49	60	54	49	59	53	48	57	52	48	46			
7	70	57	49	44	68	57	49	44	55	48	43	54	48	43	53	47	43	41			
8	65	53	45	39	64	52	44	39	51	44	39	49	43	39	48	43	38	37			
9	61	48	41	35	60	48	40	35	47	40	35	46	39	35	45	39	35	33			
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	41	36	32	30			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3023
5°	3024
10°	3018
15°	3003
20°	2980
25°	2956
30°	2907
35°	2875
40°	2838
45°	2760
50°	2500
55°	2098
60°	1557
65°	884
70°	177
75°	39
80°	58
85°	116

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2760 cd/sqm

TEST NUMBER: P1503945

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-ND (3500K-750LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.4	4.2
10°-20°	81.2	12.1
20°-30°	122.5	18.2
30°-40°	146.4	21.7
40°-50°	147.7	21.9
50°-60°	106.3	15.8
60°-70°	38.0	5.6
70°-80°	2.0	0.3
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	232.2	34.5
0°-40°	378.6	56.2
0°-60°	632.6	94.0
0°-90°	673.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	673.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	300	
5°	299	28
15°	288	81
25°	266	123
35°	234	146
45°	194	148
55°	120	106
65°	37	38
75°	1	2
85°	1	1
90°	0	

TEST NUMBER: P1503945

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-BRNZ-XX-ND (3500K-750LM)

CANDELA DISTRIBUTION (FULL):

0°	
0°	300.2
2.5°	299.2
5°	299.2
7.5°	297.2
10°	295.2
12.5°	292.2
15°	288.1
17.5°	283.1
20°	278.1
22.5°	273.1
25°	266.1
27.5°	259.0
30°	250.0
32.5°	242.0
35°	233.9
37.5°	225.9
40°	215.9
42.5°	206.8
45°	193.8
47.5°	177.7
50°	159.6
52.5°	140.6
55°	119.5
57.5°	98.4
60°	77.3
62.5°	57.2
65°	37.1
67.5°	19.1
70°	6.0
72.5°	2.0
75°	1.0
77.5°	1.0
80°	1.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)