

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504082

Luminaire Tested: PRLX-SM6-03-LS-FS-D2W-XXXX-BRNZ-XX-ND (4000K-1200LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1504082
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-17)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM6-03-LS-FS-D2W-XXXX-BRNZ-XX-ND (4000K-1200LM)
Description: PrentaLux Fluxyn SM6 SURFACE MOUNT, DISC, NO DIFFUSER, BRONZE REFLECTOR
LIGHT LEVEL 3 - 1200 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 4000K CCT, 90 CRI - DIM TO WARM (1800K)
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1286.9 lumens
Efficiency: N/A
Efficacy: 91.9 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.36
Luminous Opening: Circular (Dia: 1.17' x H: 0')
CIE Type: Direct

Input Watts (W): 14
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1504082

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRNZ-XX-ND (4000K-1200LM)

Luminous Intensity Polar Plot

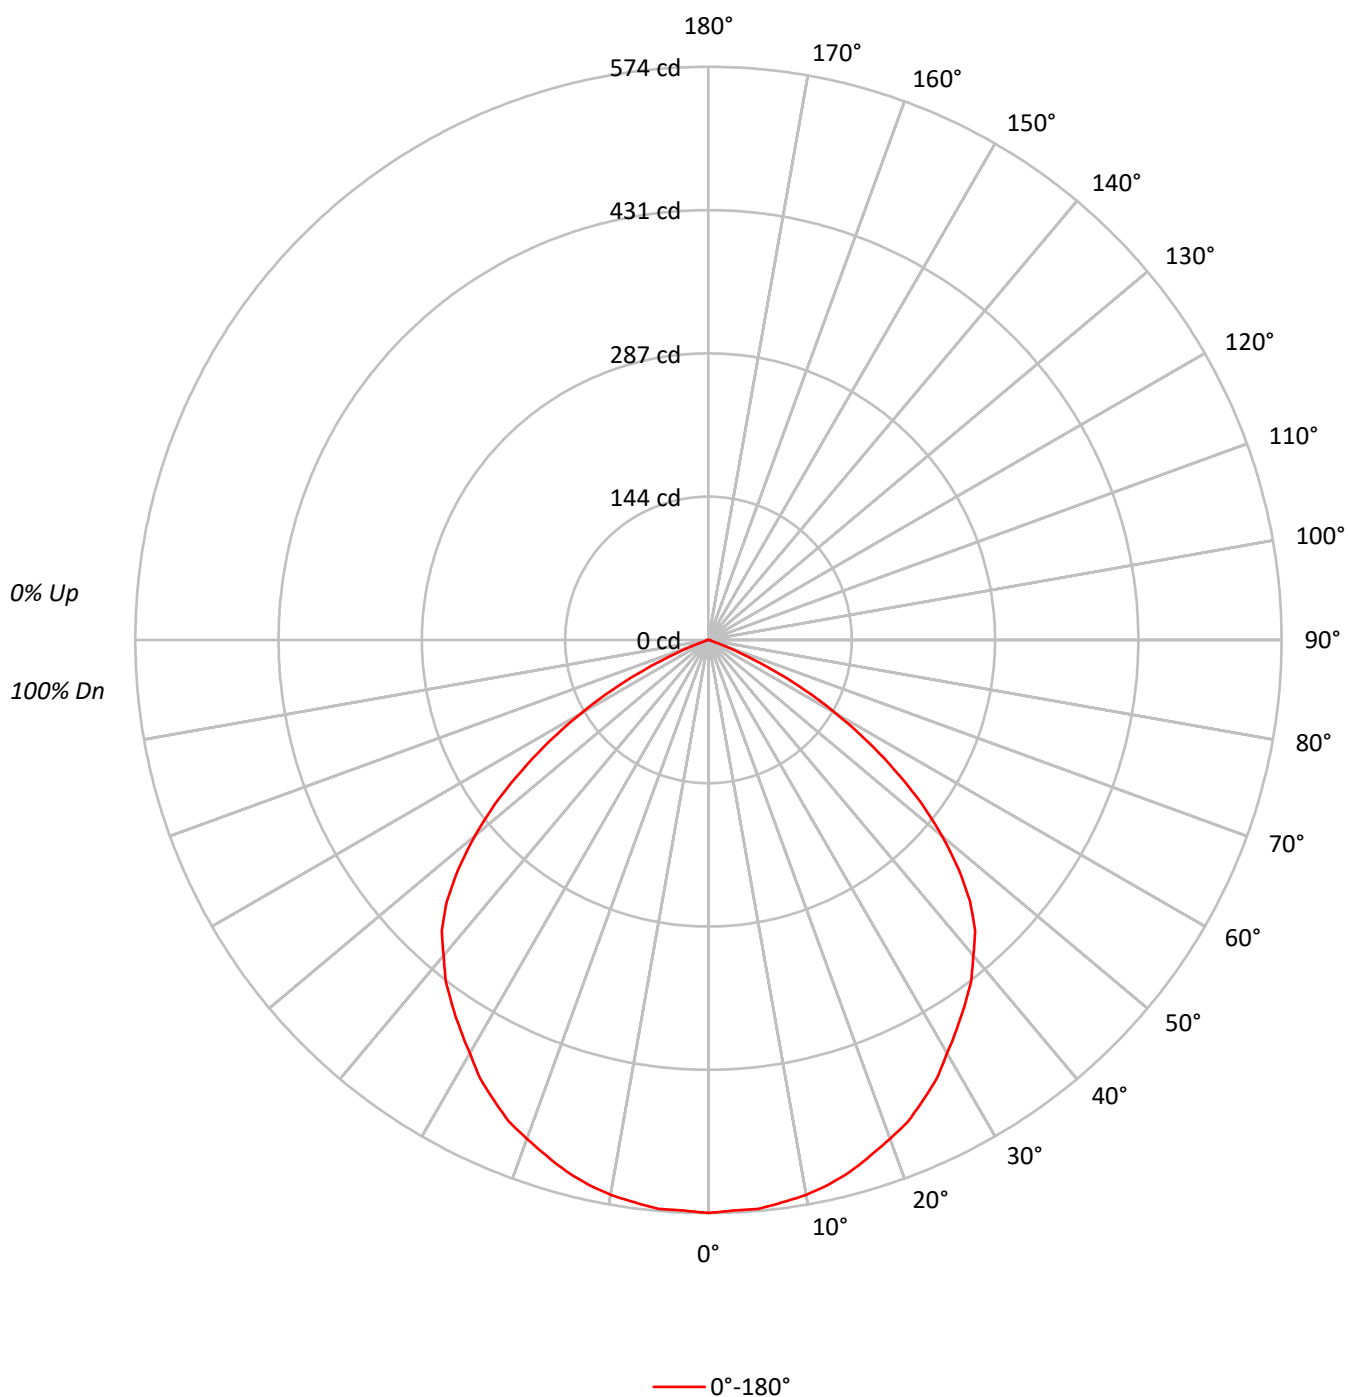



TEST NUMBER: P1504082

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRNZ-XX-ND (4000K-1200LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89		
2	103	96	91	86	101	94	89	85	91	87	83	88	84	81	85	82	80	78		
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	69	68		
4	88	77	70	64	86	76	69	63	74	67	63	71	66	62	69	65	61	59		
5	81	70	62	56	79	69	61	55	67	60	55	65	59	54	63	58	54	52		
6	75	63	55	49	73	62	55	49	60	54	49	59	53	48	57	52	48	46		
7	70	57	49	44	68	57	49	44	55	48	43	54	48	43	53	47	43	41		
8	65	53	45	39	64	52	44	39	51	44	39	49	43	39	48	43	38	37		
9	61	48	41	35	60	48	40	35	47	40	35	46	39	35	45	39	35	33		
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	41	36	32	30		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	5778
5°	5780
10°	5769
15°	5742
20°	5696
25°	5651
30°	5556
35°	5497
40°	5423
45°	5274
50°	4779
55°	4010
60°	2976
65°	1692
70°	339
75°	74
80°	110
85°	220

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5274 cd/sqm

TEST NUMBER: P1504082

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRNZ-XX-ND (4000K-1200LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.3	4.2
10°-20°	155.3	12.1
20°-30°	234.2	18.2
30°-40°	279.8	21.7
40°-50°	282.3	21.9
50°-60°	203.1	15.8
60°-70°	72.7	5.6
70°-80°	3.8	0.3
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	443.8	34.5
0°-40°	723.7	56.2
0°-60°	1209.1	94.0
0°-90°	1286.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1286.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	574	
5°	572	54
15°	551	155
25°	509	234
35°	447	280
45°	370	282
55°	228	203
65°	71	73
75°	2	4
85°	2	1
90°	0	

TEST NUMBER: P1504082

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRNZ-XX-ND (4000K-1200LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	573.8
2.5°	571.9
5°	571.9
7.5°	568.1
10°	564.2
12.5°	558.5
15°	550.8
17.5°	541.2
20°	531.6
22.5°	522.0
25°	508.6
27.5°	495.1
30°	477.9
32.5°	462.5
35°	447.2
37.5°	431.8
40°	412.6
42.5°	395.3
45°	370.4
47.5°	339.7
50°	305.1
52.5°	268.7
55°	228.4
57.5°	188.1
60°	147.8
62.5°	109.4
65°	71.0
67.5°	36.5
70°	11.5
72.5°	3.8
75°	1.9
77.5°	1.9
80°	1.9
82.5°	1.9
85°	1.9
87.5°	0.0
90°	0.0

(END OF REPORT)