

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504129

Luminaire Tested: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (4000K-900LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1504129
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-18)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (4000K-900LM)
Description: PrentaLux Fluxyn SM6 SURFACE MOUNT, DISC, NO DIFFUSER, BRASS REFLECTOR
LIGHT LEVEL 2 - 900 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 4000K CCT, 90 CRI - DIM TO WARM (1800K)
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 948.8 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.36
Luminous Opening: Circular (Dia: 1.17' x H: 0')
CIE Type: Direct

Input Watts (W): 9.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1504129

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (4000K-900LM)

Luminous Intensity Polar Plot

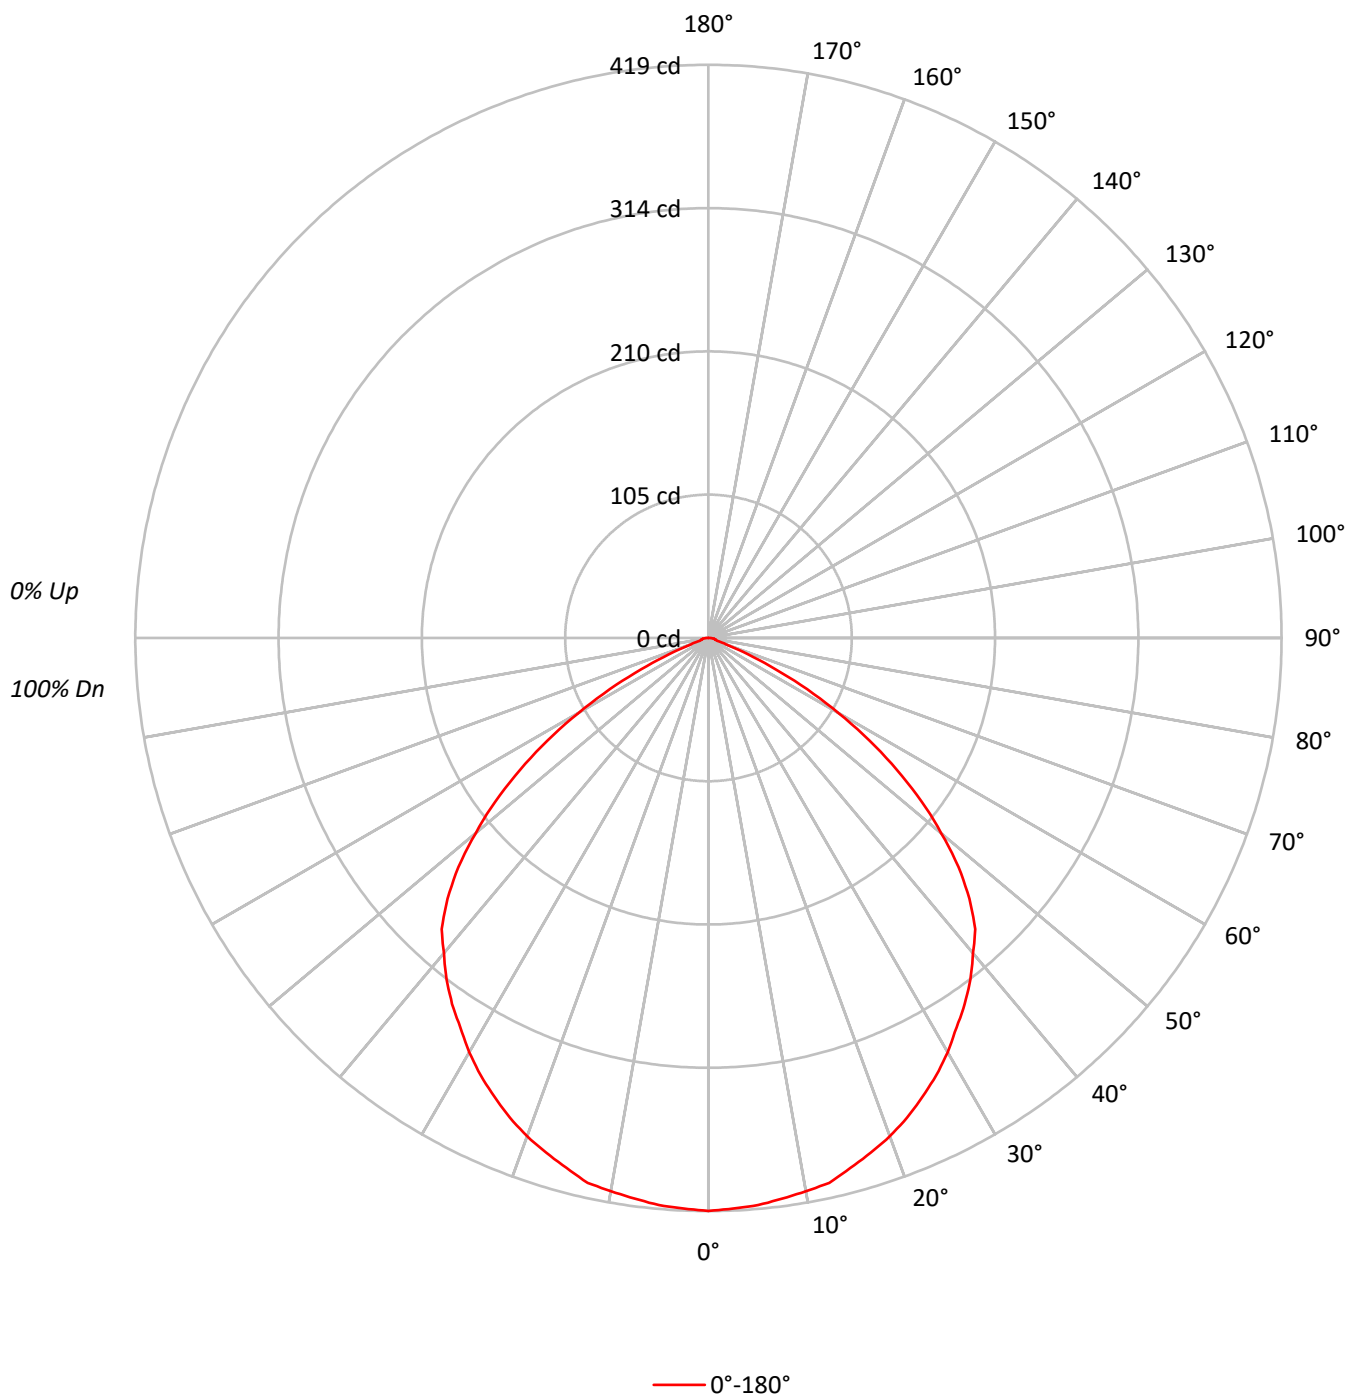



TEST NUMBER: P1504129

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (4000K-900LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	107	104	101	109	105	102	99	101	98	96	97	95	93	94	92	91	89		
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77		
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67		
4	87	77	69	63	85	76	68	63	73	67	62	71	66	61	69	64	60	58		
5	81	69	61	55	79	68	61	55	66	60	54	64	58	54	63	57	53	51		
6	75	63	55	49	73	62	54	49	60	53	48	58	52	48	57	52	47	45		
7	70	57	49	43	68	56	49	43	55	48	43	53	47	43	52	47	42	40		
8	65	52	44	39	63	52	44	39	50	43	39	49	43	38	48	42	38	36		
9	61	48	40	35	59	47	40	35	46	40	35	45	39	35	44	39	35	33		
10	57	44	37	32	56	44	37	32	43	36	32	42	36	32	41	36	31	30		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4218
5°	4207
10°	4199
15°	4182
20°	4154
25°	4112
30°	4066
35°	4016
40°	3955
45°	3842
50°	3482
55°	2951
60°	2211
65°	1291
70°	400
75°	210
80°	238
85°	312

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3842 cd/sqm

TEST NUMBER: P1504129

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (4000K-900LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.5	4.2
10°-20°	113.2	11.9
20°-30°	170.6	18.0
30°-40°	204.2	21.5
40°-50°	206.0	21.7
50°-60°	149.4	15.7
60°-70°	56.1	5.9
70°-80°	7.0	0.7
80°-90°	2.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	323.4	34.1
0°-40°	527.6	55.6
0°-60°	883.0	93.1
0°-90°	948.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	948.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	419	
5°	416	40
15°	401	113
25°	370	171
35°	327	204
45°	270	206
55°	168	149
65°	54	56
75°	5	7
85°	3	3
90°	0	

TEST NUMBER: P1504129

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-ND (4000K-900LM)

CANDELA DISTRIBUTION (FULL):

	0°
0°	418.9
2.5°	417.5
5°	416.2
7.5°	413.4
10°	410.7
12.5°	408.0
15°	401.2
17.5°	394.5
20°	387.7
22.5°	379.6
25°	370.1
27.5°	360.6
30°	349.7
32.5°	337.5
35°	326.7
37.5°	314.5
40°	300.9
42.5°	288.7
45°	269.8
47.5°	248.1
50°	222.3
52.5°	196.6
55°	168.1
57.5°	139.6
60°	109.8
62.5°	81.3
65°	54.2
67.5°	31.2
70°	13.6
72.5°	6.8
75°	5.4
77.5°	5.4
80°	4.1
82.5°	4.1
85°	2.7
87.5°	1.4
90°	0.0

(END OF REPORT)