

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504159

Luminaire Tested: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-OT (4000K-900LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1504159
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-21)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-OT (4000K-900LM)
Description: PrentaLux Fluxyn SM6 SURFACE MOUNT, DISC, OPEN TAPERED, BRASS REFLECTOR
LIGHT LEVEL 2 - 900 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 4000K CCT, 90 CRI - DIM TO WARM (1800K)
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 713.9 lumens
Efficiency: N/A
Efficacy: 74.4 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.22
Luminous Opening: Circular (Dia: 1.17' x H: 0')
CIE Type: Direct

Input Watts (W): 9.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1504159

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-OT (4000K-900LM)

Luminous Intensity Polar Plot

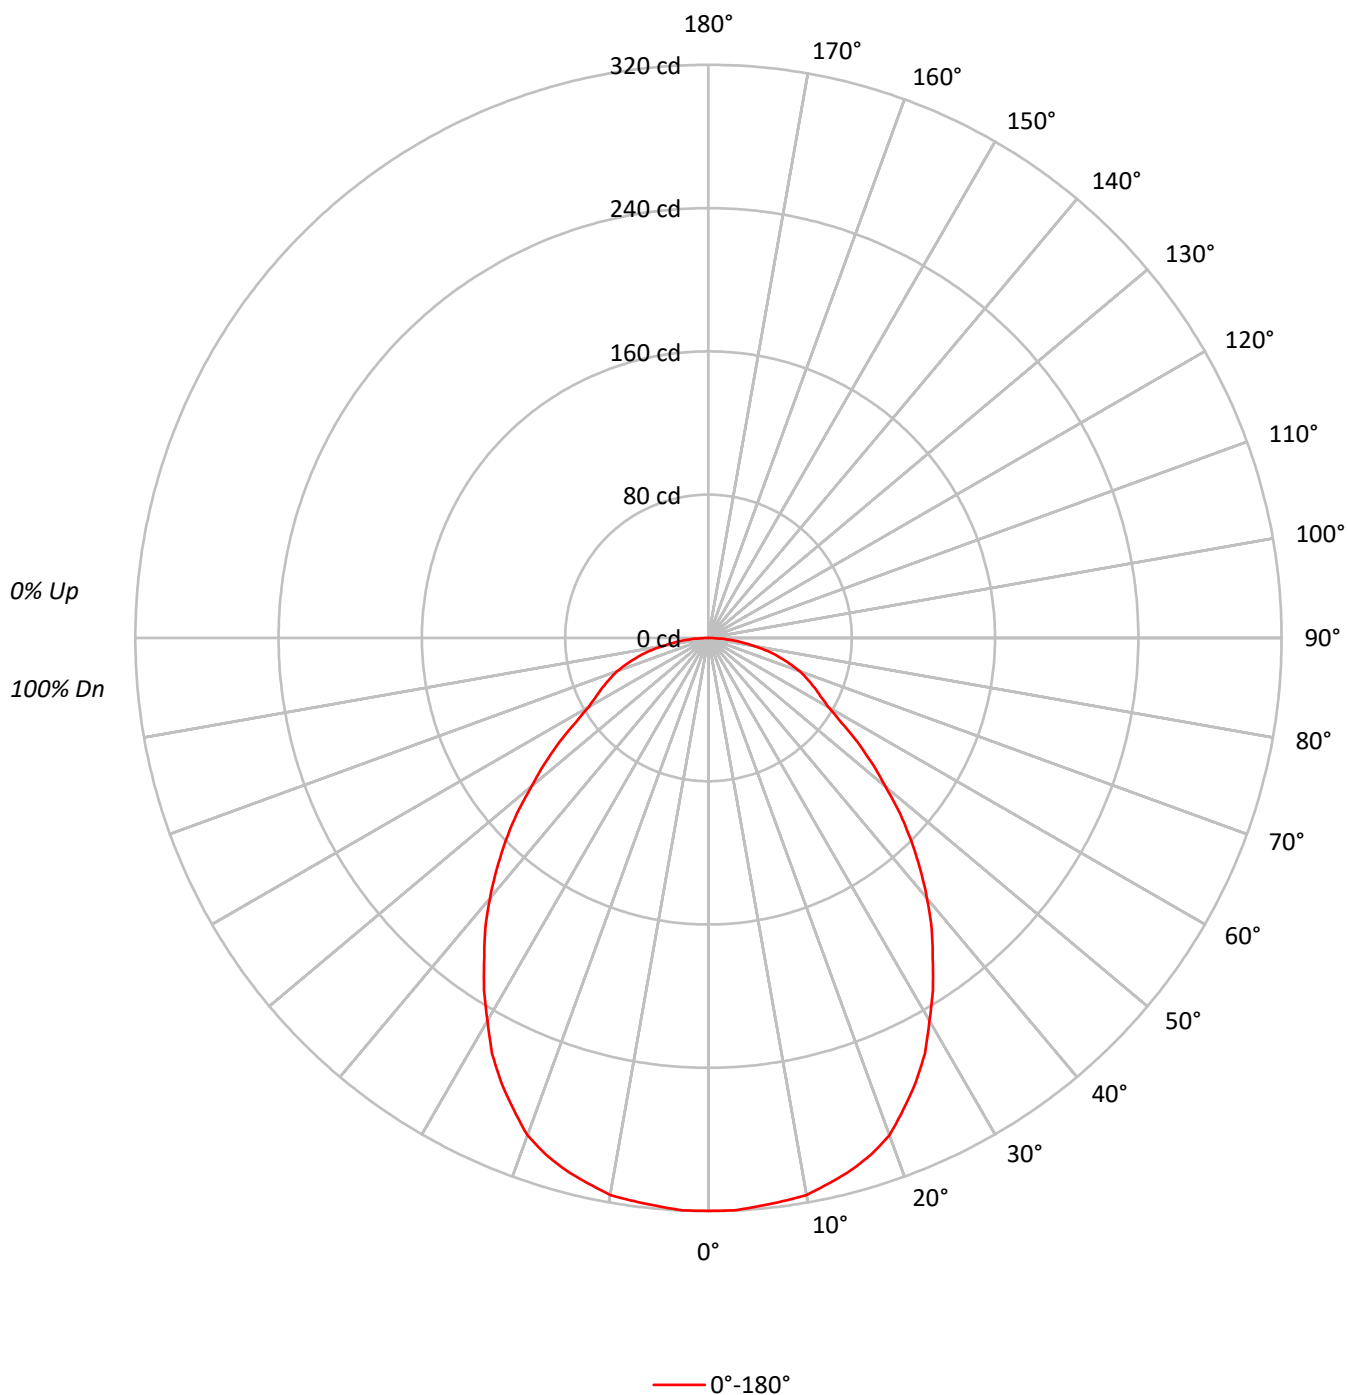



TEST NUMBER: P1504159

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-OT (4000K-900LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20				
RC	80					70					50					30					10				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10		
RCR																									
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100							
1	109	105	101	97	107	103	99	96	99	96	93	95	92	90	91	89	87	85							
2	100	93	86	81	98	91	85	80	87	82	78	84	80	76	81	78	75	73							
3	92	82	75	69	90	81	74	68	78	72	67	75	70	66	73	68	65	62							
4	85	74	65	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54							
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48							
6	73	60	52	46	71	59	51	46	58	51	45	56	50	45	54	49	44	42							
7	68	55	47	41	66	54	46	41	53	46	41	51	45	40	50	44	40	38							
8	64	51	42	37	62	50	42	37	49	42	37	47	41	36	46	40	36	34							
9	60	47	39	34	58	46	39	33	45	38	33	44	38	33	43	37	33	31							
10	56	43	36	31	55	43	35	31	42	35	30	41	35	30	40	34	30	28							

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3221
5°	3220
10°	3229
15°	3208
20°	3166
25°	3042
30°	2868
35°	2682
40°	2495
45°	2278
50°	2018
55°	1785
60°	1557
65°	1551
70°	1596
75°	1583
80°	1496
85°	1409

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2278 cd/sqm

TEST NUMBER: P1504159

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-OT (4000K-900LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.3	4.2
10°-20°	86.7	12.1
20°-30°	125.6	17.6
30°-40°	136.6	19.1
40°-50°	123.1	17.2
50°-60°	91.1	12.8
60°-70°	64.6	9.1
70°-80°	42.7	6.0
80°-90°	13.1	1.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	242.6	34.0
0°-40°	379.3	53.1
0°-60°	593.5	83.1
0°-90°	713.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	713.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	320	
5°	319	30
15°	308	87
25°	274	126
35°	218	137
45°	160	123
55°	102	91
65°	65	65
75°	41	43
85°	12	13
90°	0	

TEST NUMBER: P1504159

CATALOG NUMBER: PRLX-SM6-03-LS-FS-D2W-XXXX-BRSS-XX-OT (4000K-900LM)

CANDELA DISTRIBUTION (FULL):

0°	
0°	319.9
2.5°	319.9
5°	318.6
7.5°	317.2
10°	315.8
12.5°	311.8
15°	307.7
17.5°	302.3
20°	295.5
22.5°	284.7
25°	273.8
27.5°	261.6
30°	246.7
32.5°	233.2
35°	218.2
37.5°	204.7
40°	189.8
42.5°	174.9
45°	160.0
47.5°	145.0
50°	128.8
52.5°	115.2
55°	101.7
57.5°	88.1
60°	77.3
62.5°	70.5
65°	65.1
67.5°	59.6
70°	54.2
72.5°	47.4
75°	40.7
77.5°	33.9
80°	25.8
82.5°	19.0
85°	12.2
87.5°	4.1
90°	0.0

(END OF REPORT)