

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504072

Luminaire Tested: PRLX-SM6-03-LS-FS-010-XXXX-WHTE-XX-OT (5000K-900LM)

Issue Date: 7/28/2026

Test Information

Test Method: LM-79-2024
Report Number: P1504072
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2606-836-19)
Test Lab: INNOVATION CENTER
Issue Date: 7/28/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-SM6-03-LS-FS-010-XXXX-WHTE-XX-OT (5000K-900LM)
Description: PrentaLux Fluxyn SM6 SURFACE MOUNT, DISC, OPEN TAPERED, WHITE REFLECTOR
LIGHT LEVEL 2 - 900 NOMINAL LUMENS
Light Source: SELECTABLE CCT - 5000K CCT, 90 CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 729.9 lumens
Efficiency: N/A
Efficacy: 86.9 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.24
Luminous Opening: Circular (Dia: 1.17' x H: 0')
CIE Type: Direct

Input Watts (W): 8.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1504072

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-WHTE-XX-OT (5000K-900LM)

Luminous Intensity Polar Plot

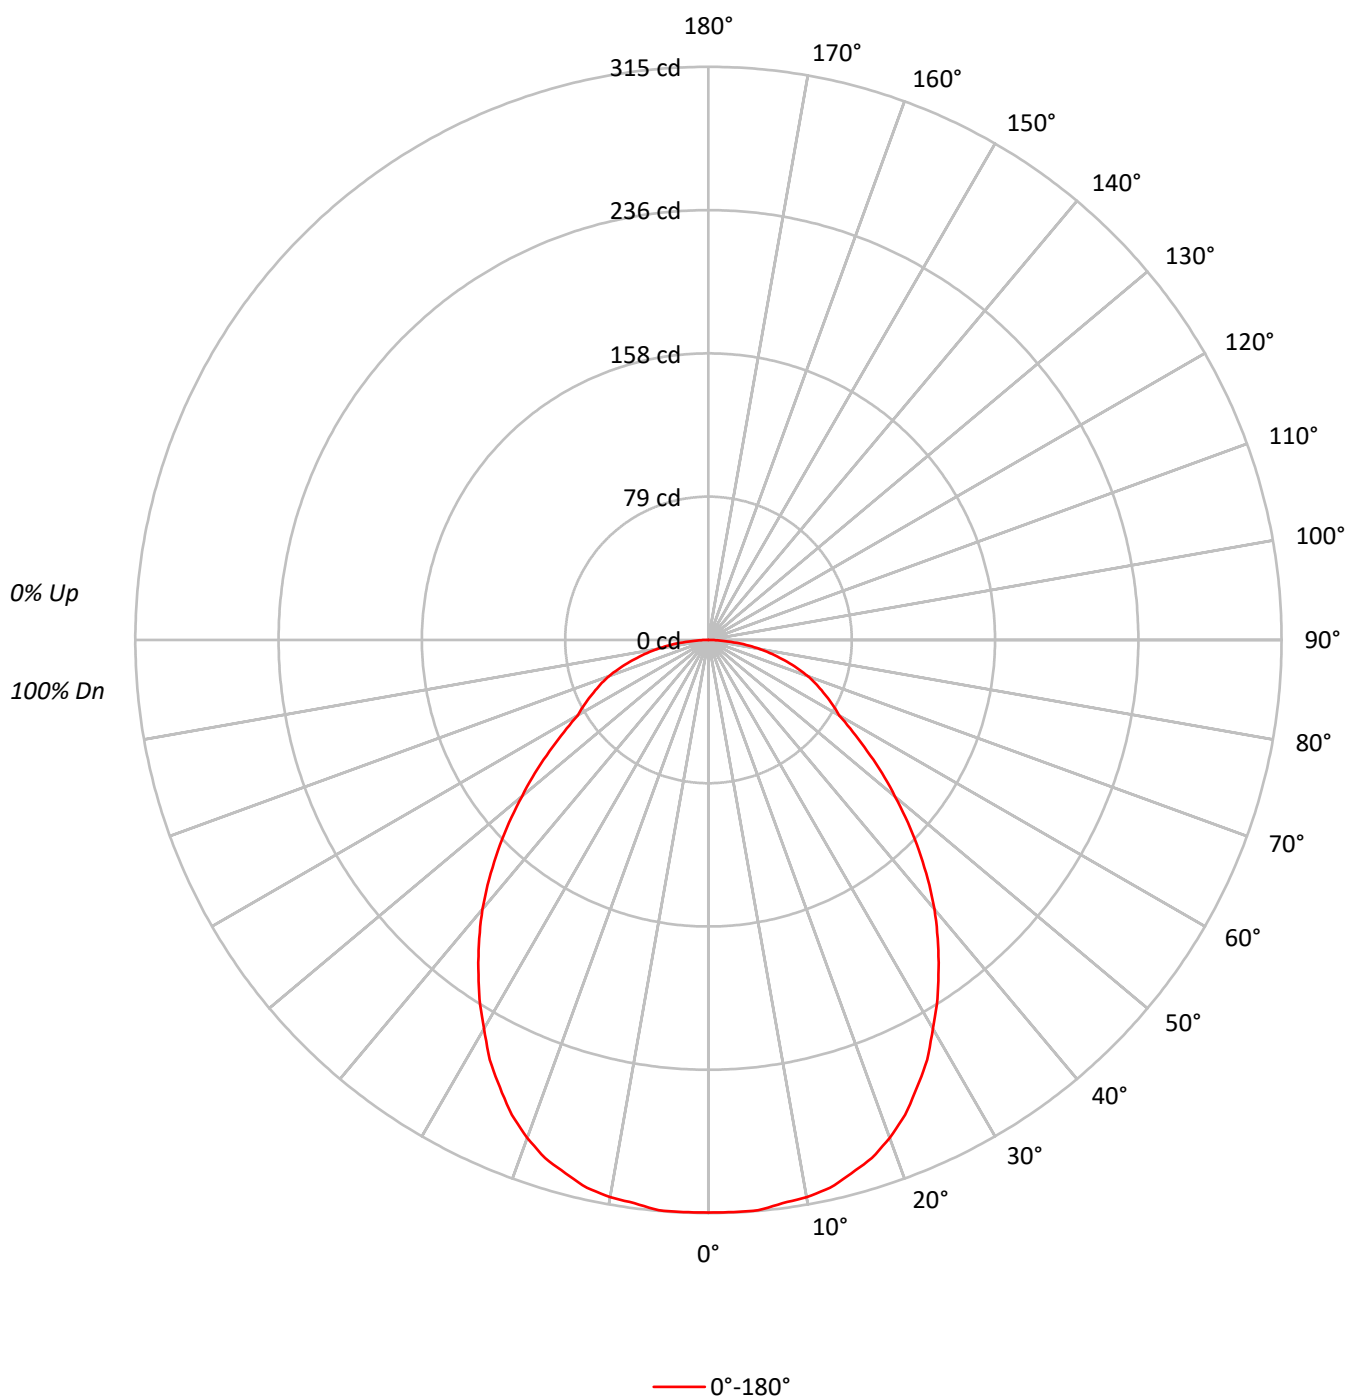



TEST NUMBER: P1504072

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-WHTE-XX-OT (5000K-900LM)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	109	105	101	97	107	102	99	95	98	95	92	94	92	90	91	89	87	85			
2	100	92	86	80	97	90	84	79	87	82	77	84	79	76	81	77	74	72			
3	92	82	74	68	89	80	73	67	77	71	66	75	69	65	72	68	64	62			
4	85	73	65	58	82	72	64	58	69	63	57	67	61	56	65	60	56	54			
5	78	66	57	51	76	65	57	51	63	56	50	61	54	50	59	53	49	47			
6	72	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42			
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	44	39	37			
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	34			
9	59	46	38	33	58	45	38	33	44	37	33	43	37	32	42	36	32	30			
10	55	43	35	30	54	42	35	30	41	34	30	40	34	30	39	34	29	28			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3169
5°	3181
10°	3180
15°	3164
20°	3120
25°	3014
30°	2867
35°	2710
40°	2541
45°	2328
50°	2096
55°	1870
60°	1671
65°	1682
70°	1713
75°	1688
80°	1653
85°	1433

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2328 cd/sqm

TEST NUMBER: P1504072

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-WHTE-XX-OT (5000K-900LM)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.9	4.1
10°-20°	85.6	11.7
20°-30°	124.7	17.1
30°-40°	137.8	18.9
40°-50°	126.0	17.3
50°-60°	95.8	13.1
60°-70°	69.9	9.6
70°-80°	45.8	6.3
80°-90°	14.3	2.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	240.2	32.9
0°-40°	378.0	51.8
0°-60°	599.8	82.2
0°-90°	729.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	729.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	315	
5°	315	30
15°	304	86
25°	271	125
35°	220	138
45°	164	126
55°	106	96
65°	71	70
75°	43	46
85°	12	14
90°	0	

TEST NUMBER: P1504072

CATALOG NUMBER: PRLX-SM6-03-LS-FS-010-XXXX-WHTE-XX-OT (5000K-900LM)

CANDELA DISTRIBUTION (FULL):

0°	
0°	314.7
2.5°	314.7
5°	314.7
7.5°	312.2
10°	311.0
12.5°	308.5
15°	303.5
17.5°	298.6
20°	291.2
22.5°	282.5
25°	271.3
27.5°	260.2
30°	246.6
32.5°	234.2
35°	220.5
37.5°	206.9
40°	193.3
42.5°	178.4
45°	163.5
47.5°	148.7
50°	133.8
52.5°	120.2
55°	106.5
57.5°	94.2
60°	83.0
62.5°	76.8
65°	70.6
67.5°	64.4
70°	58.2
72.5°	50.8
75°	43.4
77.5°	35.9
80°	28.5
82.5°	21.1
85°	12.4
87.5°	5.0
90°	0.0

(END OF REPORT)