

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504898

Luminaire Tested: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (3500K_L12_Narrow_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1504898
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-58)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (3500K_L12_Narrow_120V)
Description: PrentaLux UHBS2 6-INCH SELECTABLE HIGH BAY 1218 LIGHT ENGINE, CONIC WHITE SHADE, NARROW DISTRIBUTION
LIGHT LEVEL 1 - 12,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11544.0 lumens
Efficiency: N/A
Efficacy: 141.3 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 1
Luminous Opening: Circular (Dia: 1.3' x H: 0')
CIE Type: Direct

Input Watts (W): 81.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1504898

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (3500K_L12_Narrow_120V)

Luminous Intensity Polar Plot

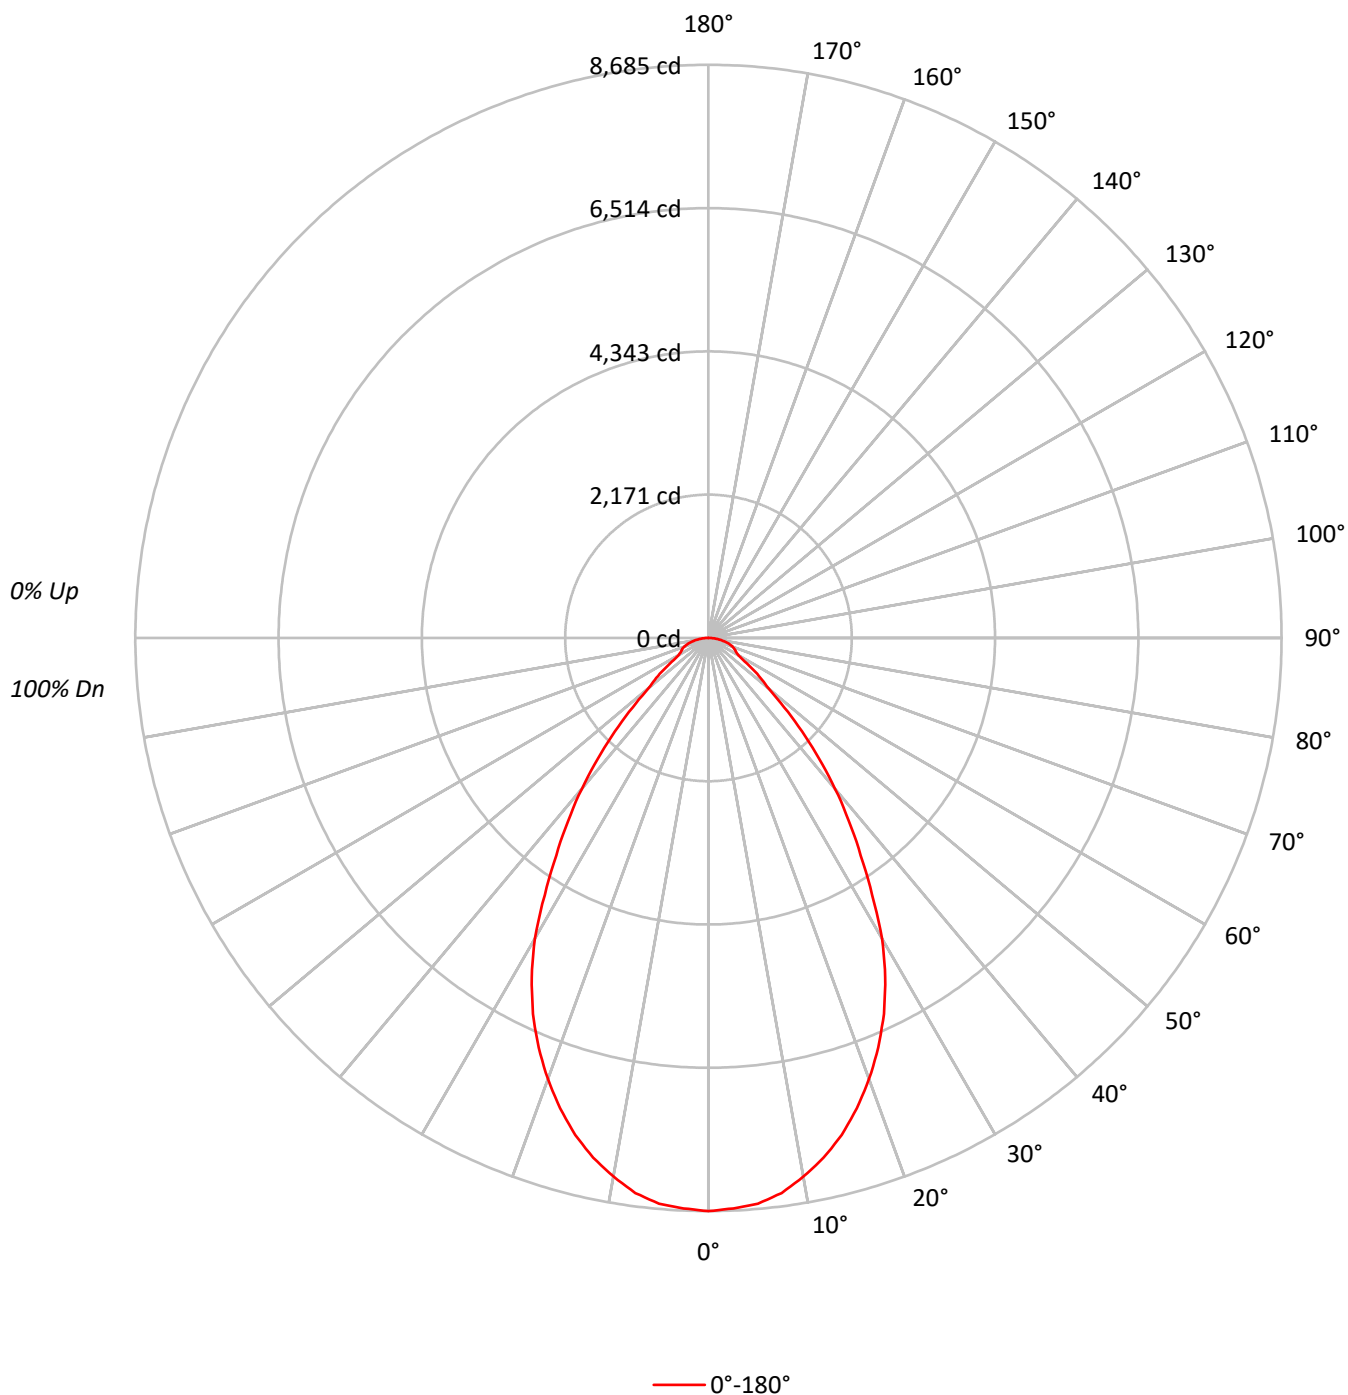

TEST NUMBER: P1504898

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (3500K_L12_Narrow_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90		
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80		
3	97	89	83	78	95	88	82	77	85	80	76	83	78	75	80	77	74	72		
4	91	82	75	70	89	81	74	69	78	73	68	76	71	68	74	70	67	65		
5	85	75	68	63	84	74	67	62	72	66	62	70	65	61	69	64	61	59		
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54		
7	75	64	57	52	74	64	57	52	62	56	52	61	55	51	60	55	51	49		
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46		
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42		
10	64	52	46	41	62	52	45	41	51	45	41	50	45	41	49	44	41	39		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	70428
5°	70039
10°	68253
15°	65444
20°	61386
25°	56277
30°	49300
35°	39831
40°	31622
45°	22994
50°	14883
55°	11292
60°	8492
65°	8623
70°	9290
75°	9509
80°	9424
85°	9230

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22994 cd/sqm

TEST NUMBER: P1504898

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (3500K_L12_Narrow_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	811.2	7.0
10°-20°	2182.3	18.9
20°-30°	2867.7	24.8
30°-40°	2526.7	21.9
40°-50°	1553.7	13.5
50°-60°	727.7	6.3
60°-70°	448.6	3.9
70°-80°	317.7	2.8
80°-90°	108.5	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5861.2	50.8
0°-40°	8387.9	72.7
0°-60°	10669.3	92.4
0°-90°	11544.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11544.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8685	
5°	8604	811
15°	7795	2182
25°	6289	2868
35°	4023	2527
45°	2005	1554
55°	799	728
65°	449	449
75°	304	318
85°	99	108
90°	0	

TEST NUMBER: P1504898

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (3500K_L12_Narrow_120V)

CANDELA DISTRIBUTION (FULL):

0°	
0°	8684.6
2.5°	8652.1
5°	8603.8
7.5°	8483.7
10°	8288.6
12.5°	8065.2
15°	7795.1
17.5°	7473.3
20°	7113.1
22.5°	6720.4
25°	6289.4
27.5°	5799.2
30°	5264.8
32.5°	4620.4
35°	4023.4
37.5°	3495.7
40°	2987.1
42.5°	2481.1
45°	2005.0
47.5°	1554.8
50°	1179.7
52.5°	996.3
55°	798.7
57.5°	624.4
60°	523.6
62.5°	478.5
65°	449.4
67.5°	425.2
70°	391.8
72.5°	351.0
75°	303.5
77.5°	252.6
80°	201.8
82.5°	150.1
85°	99.2
87.5°	48.4
90°	0.0

(END OF REPORT)