

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504414

Luminaire Tested: PRLX-UHBS2-1218-MV-L8C5-U-A-06-BLAK-PS (4000K_L16_Medium_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1504414
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-41)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-1218-MV-L8C5-U-A-06-BLAK-PS (4000K_L16_Medium_120V)
Description: PrentaLux UHBS2 6-INCH SELECTABLE HIGH BAY 1218 LIGHT ENGINE, DOMIC BLACK SHADE, MEDIUM DISTRIBUTION
LIGHT LEVEL 2 - 16,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11153.6 lumens
Efficiency: N/A
Efficacy: 112.1 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.05
Luminous Opening: Circular (Dia: 1.29' x H: 0')
CIE Type: Direct

Input Watts (W): 99.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1504414

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-06-BLAK-PS (4000K_L16_Medium_120V)

Luminous Intensity Polar Plot

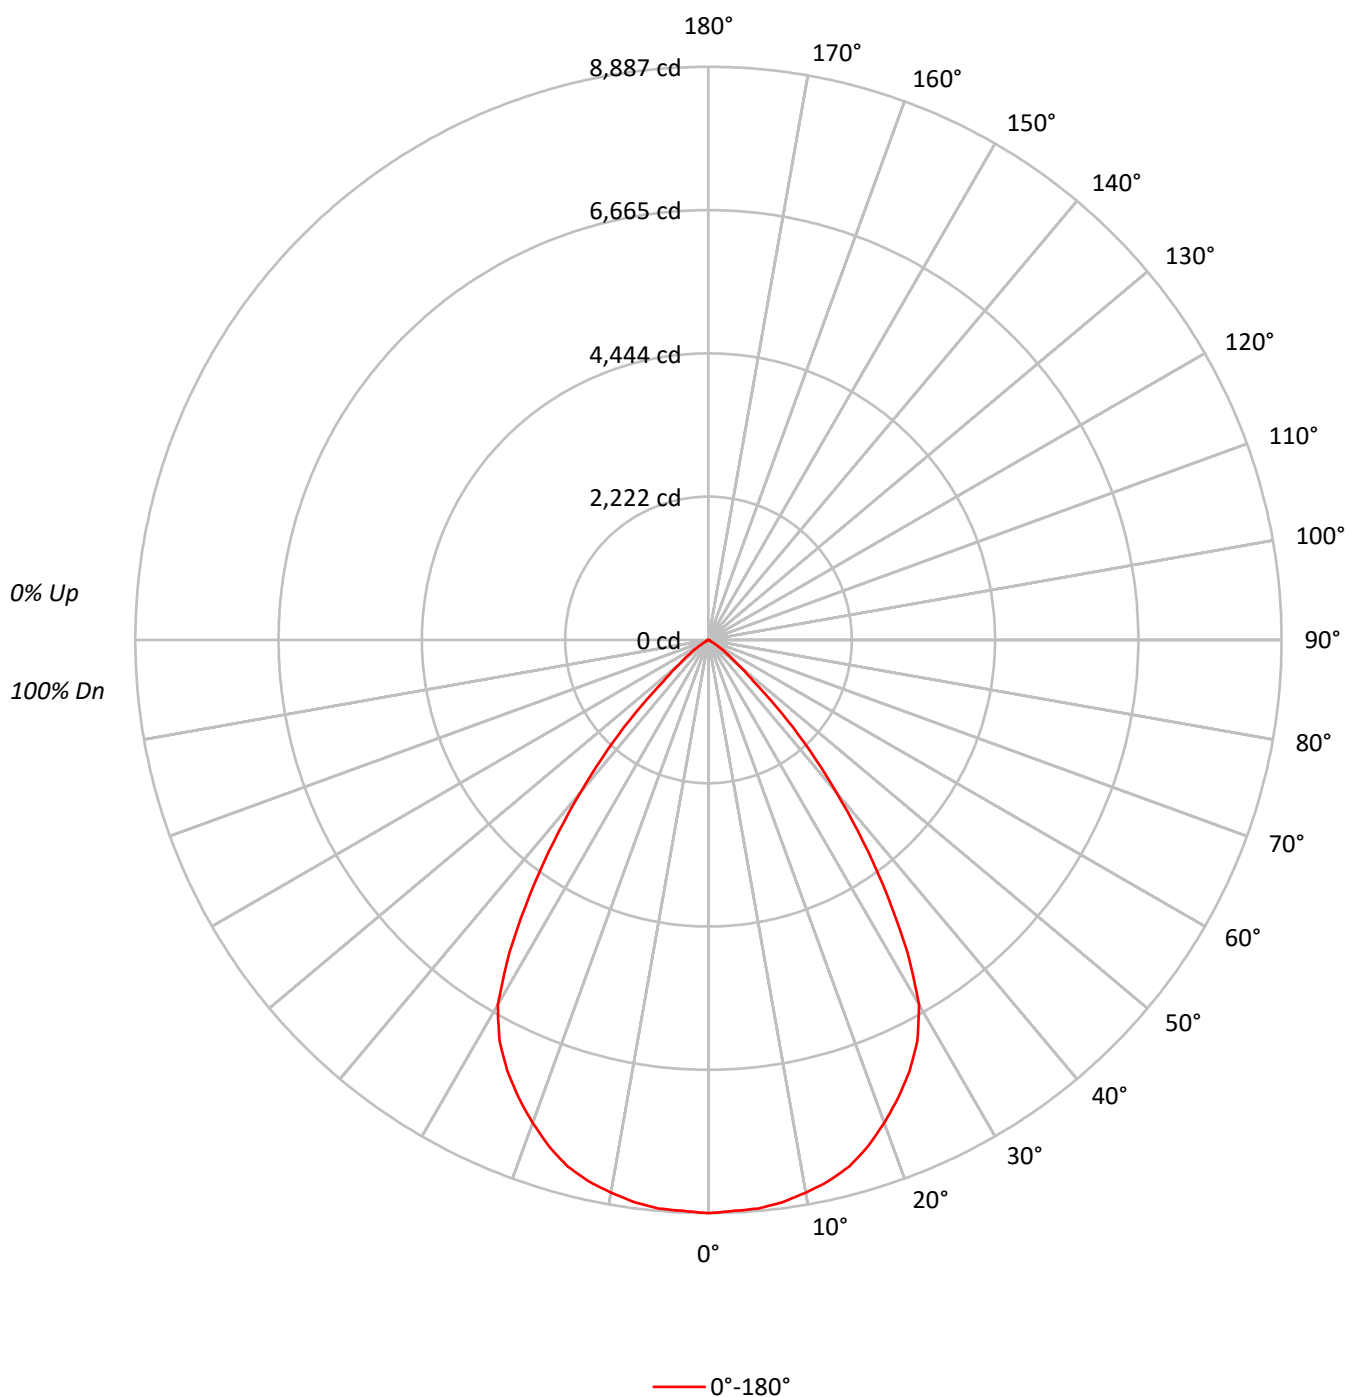

TEST NUMBER: P1504414

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-06-BLAK-PS (4000K_L16_Medium_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20				
RC	80					70					50					30					10				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10		
RCR																									
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100							
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93							
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85							
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78							
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71							
5	90	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	66							
6	84	75	68	64	83	74	68	63	72	67	63	71	66	62	70	65	62	60							
7	80	70	63	58	78	69	63	58	68	62	58	66	61	58	65	61	57	56							
8	75	65	58	54	74	64	58	54	63	58	54	62	57	53	61	56	53	52							
9	71	61	54	50	70	60	54	50	59	54	50	58	53	49	57	53	49	48							
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45							

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	73005
5°	72973
10°	72570
15°	71844
20°	69635
25°	66835
30°	61956
35°	48417
40°	33047
45°	18527
50°	7968
55°	3772
60°	918
65°	455
70°	514
75°	549
80°	577
85°	575

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18527 cd/sqm

TEST NUMBER: P1504414

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-06-BLAK-PS (4000K_L16_Medium_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	839.9	7.5
10°-20°	2371.1	21.3
20°-30°	3374.1	30.3
30°-40°	2989.1	26.8
40°-50°	1271.9	11.4
50°-60°	253.3	2.3
60°-70°	29.1	0.3
70°-80°	18.1	0.2
80°-90°	6.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6585.1	59.0
0°-40°	9574.2	85.8
0°-60°	11099.4	99.5
0°-90°	11153.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11153.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8887	
5°	8850	840
15°	8448	2371
25°	7374	3374
35°	4828	2989
45°	1595	1272
55°	263	253
65°	23	29
75°	17	18
85°	6	7
90°	0	

TEST NUMBER: P1504414

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-06-BLAK-PS (4000K_L16_Medium_120V)

CANDELA DISTRIBUTION (FULL):

	0°
0°	8887.4
2.5°	8860.9
5°	8849.7
7.5°	8794.8
10°	8700.2
12.5°	8596.5
15°	8448.0
17.5°	8230.3
20°	7965.9
22.5°	7686.2
25°	7373.9
27.5°	7012.9
30°	6531.8
32.5°	5735.4
35°	4828.2
37.5°	3936.2
40°	3081.8
42.5°	2323.0
45°	1594.8
47.5°	939.8
50°	623.5
52.5°	419.0
55°	263.4
57.5°	129.2
60°	55.9
62.5°	33.6
65°	23.4
67.5°	22.4
70°	21.4
72.5°	19.3
75°	17.3
77.5°	15.3
80°	12.2
82.5°	10.2
85°	6.1
87.5°	3.1
90°	0.0

(END OF REPORT)