

Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504283

Luminaire Tested: PRLX-UHBS2-1218-MV-L8C5-U-A-04-CLER-PS (4000K\_L18\_Narrow\_120V)

Issue Date: 7/31/2026

**Test Information**

Test Method: LM-79-2024  
Report Number: P1504283  
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-19)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 7/31/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PrentaLux  
Catalog Number: PRLX-UHBS2-1218-MV-L8C5-U-A-04-CLER-PS (4000K\_L18\_Narrow\_120V)  
Description: PrentaLux UHBS2 4-INCH SELECTABLE HIGH BAY 1218 LIGHT ENGINE, DOMIC CLEAR SHADE, NARROW DISTRIBUTION  
LIGHT LEVEL 1 - 18,000 LUMENS  
Light Source: 4000K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 17413.2 lumens  
Efficiency: N/A  
Efficacy: 146.0 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 1  
Luminous Opening: Ellipsoidal Spheroid (W: 1.23' x L: 1.23' x H: 0.58')  
CIE Type: Direct

Input Watts (W): 119.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1504283

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-04-CLER-PS (4000K\_L18\_Narrow\_120V)

### Luminous Intensity Polar Plot

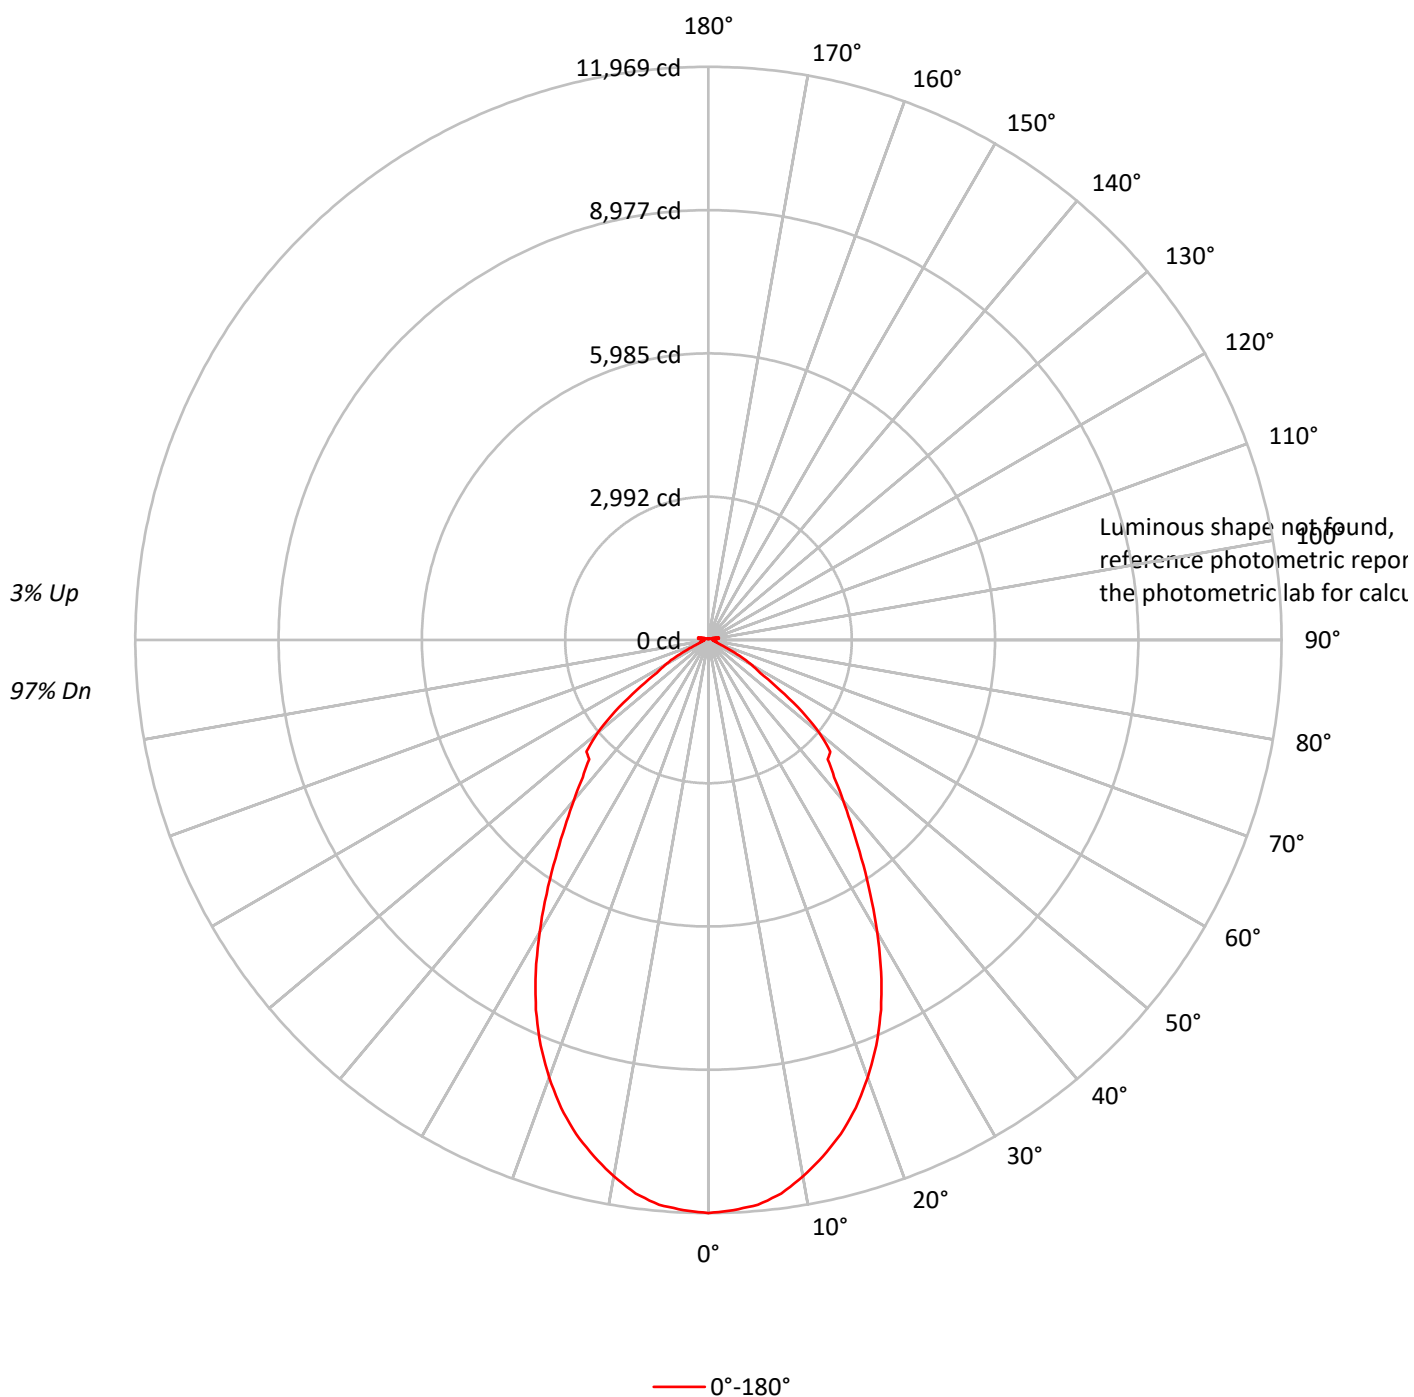




TEST NUMBER: P1504283

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-04-CLER-PS (4000K\_L18\_Narrow\_120V)

### COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |    |  |  |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|--|--|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    | 20 |    |  |  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |    |    | 10 |    |  |  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50 | 30 | 10 | 0  |  |  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |    |  |  |
| 0   | 118 | 118 | 118 | 118 | 115 | 115 | 115 | 115 | 109 | 109 | 109 | 104 | 104 | 104 | 99 | 99 | 99 | 97 |  |  |
| 1   | 111 | 107 | 104 | 101 | 108 | 105 | 102 | 99  | 100 | 98  | 96  | 96  | 94  | 92  | 92 | 90 | 89 | 87 |  |  |
| 2   | 104 | 97  | 92  | 88  | 101 | 95  | 91  | 87  | 91  | 87  | 84  | 88  | 85  | 82  | 84 | 82 | 80 | 78 |  |  |
| 3   | 96  | 88  | 82  | 77  | 94  | 87  | 81  | 76  | 83  | 78  | 74  | 80  | 76  | 73  | 78 | 74 | 71 | 69 |  |  |
| 4   | 90  | 80  | 74  | 68  | 88  | 79  | 73  | 68  | 76  | 71  | 66  | 74  | 69  | 65  | 71 | 67 | 64 | 62 |  |  |
| 5   | 84  | 74  | 66  | 61  | 82  | 72  | 66  | 61  | 70  | 64  | 60  | 68  | 63  | 59  | 66 | 61 | 58 | 56 |  |  |
| 6   | 79  | 68  | 60  | 55  | 77  | 67  | 60  | 55  | 65  | 59  | 54  | 63  | 57  | 53  | 61 | 56 | 53 | 51 |  |  |
| 7   | 74  | 62  | 55  | 50  | 72  | 61  | 55  | 50  | 60  | 54  | 49  | 58  | 53  | 49  | 57 | 52 | 48 | 46 |  |  |
| 8   | 69  | 58  | 51  | 46  | 68  | 57  | 50  | 45  | 56  | 49  | 45  | 54  | 49  | 45  | 53 | 48 | 44 | 42 |  |  |
| 9   | 65  | 54  | 47  | 42  | 64  | 53  | 46  | 42  | 52  | 46  | 41  | 51  | 45  | 41  | 49 | 44 | 41 | 39 |  |  |
| 10  | 62  | 50  | 43  | 39  | 60  | 50  | 43  | 39  | 48  | 42  | 38  | 47  | 42  | 38  | 46 | 41 | 38 | 36 |  |  |

**AVERAGE LUMINANCE (cd/sqm):**

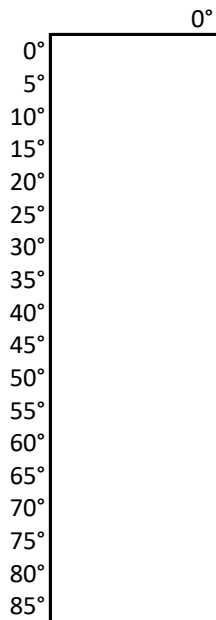

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: -  
Vertical Angle: -  
Luminance: -

TEST NUMBER: P1504283

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-04-CLER-PS (4000K\_L18\_Narrow\_120V)

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 1115.4  | 6.4       |
| 10°-20°   | 2990.1  | 17.2      |
| 20°-30°   | 3884.5  | 22.3      |
| 30°-40°   | 3499.3  | 20.1      |
| 40°-50°   | 2808.0  | 16.1      |
| 50°-60°   | 1687.8  | 9.7       |
| 60°-70°   | 552.6   | 3.2       |
| 70°-80°   | 176.8   | 1.0       |
| 80°-90°   | 111.0   | 0.6       |
| 90°-100°  | 190.8   | 1.1       |
| 100°-110° | 206.7   | 1.2       |
| 110°-120° | 94.8    | 0.5       |
| 120°-130° | 35.0    | 0.2       |
| 130°-140° | 21.4    | 0.1       |
| 140°-150° | 18.0    | 0.1       |
| 150°-160° | 13.0    | 0.1       |
| 160°-170° | 6.5     | 0.0       |
| 170°-180° | 1.8     | 0.0       |
| 0°-30°    | 7990.0  | 45.9      |
| 0°-40°    | 11489.2 | 66.0      |
| 0°-60°    | 15985.1 | 91.8      |
| 0°-90°    | 16825.4 | 96.6      |
| 90°-120°  | 492.3   | 2.8       |
| 90°-150°  | 566.6   | 3.3       |
| 90°-180°  | 588.0   | 3.4       |
| 0°-180°   | 17413.2 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°    | Flux |
|------|-------|------|
| 0°   | 11969 |      |
| 5°   | 11842 | ###  |
| 15°  | 10683 | 2990 |
| 25°  | 8524  | 3885 |
| 35°  | 5568  | 3499 |
| 45°  | 3523  | 2808 |
| 55°  | 1820  | 1688 |
| 65°  | 504   | 553  |
| 75°  | 165   | 177  |
| 85°  | 93    | 82   |
| 90°  | 115   | 65   |
| 95°  | 178   | 155  |
| 105° | 202   | 207  |
| 115° | 92    | 95   |
| 125° | 37    | 35   |
| 135° | 27    | 21   |
| 145° | 28    | 18   |
| 155° | 28    | 13   |
| 165° | 23    | 6    |
| 175° | 18    | 2    |
| 180° | 18    |      |

TEST NUMBER: P1504283

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-04-CLER-PS (4000K\_L18\_Narrow\_120V)

**CANDELA DISTRIBUTION (FULL):**

| 0°     |         |
|--------|---------|
| 0°     | 11969.4 |
| 2.5°   | 11917.1 |
| 5°     | 11842.3 |
| 7.5°   | 11660.6 |
| 10°    | 11373.1 |
| 12.5°  | 11048.9 |
| 15°    | 10683.1 |
| 17.5°  | 10243.7 |
| 20°    | 9725.8  |
| 22.5°  | 9161.7  |
| 25°    | 8523.9  |
| 27.5°  | 7810.1  |
| 30°    | 7050.0  |
| 32.5°  | 6292.3  |
| 35°    | 5567.8  |
| 37.5°  | 4920.5  |
| 40°    | 4373.0  |
| 42.5°  | 3886.1  |
| 45°    | 3522.6  |
| 47.5°  | 3453.7  |
| 50°    | 3034.5  |
| 52.5°  | 2464.4  |
| 55°    | 1819.5  |
| 57.5°  | 1277.9  |
| 60°    | 1055.8  |
| 62.5°  | 779.1   |
| 65°    | 503.6   |
| 67.5°  | 323.0   |
| 70°    | 230.4   |
| 72.5°  | 187.7   |
| 75°    | 165.1   |
| 77.5°  | 142.5   |
| 80°    | 118.8   |
| 82.5°  | 98.6    |
| 85°    | 92.6    |
| 87.5°  | 98.6    |
| 90°    | 115.2   |
| 92.5°  | 144.9   |
| 95°    | 178.2   |
| 97.5°  | 207.8   |
| 100°   | 223.3   |
| 102.5° | 219.7   |
| 105°   | 201.9   |
| 107.5° | 174.6   |
| 110°   | 144.9   |

TEST NUMBER: P1504283

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-A-04-CLER-PS (4000K\_L18\_Narrow\_120V)

**CANDELA DISTRIBUTION (continued):**

|        | 0°    |
|--------|-------|
| 112.5° | 116.4 |
| 115°   | 91.5  |
| 117.5° | 71.3  |
| 120°   | 55.8  |
| 122.5° | 43.9  |
| 125°   | 36.8  |
| 127.5° | 32.1  |
| 130°   | 28.5  |
| 132.5° | 27.3  |
| 135°   | 27.3  |
| 137.5° | 27.3  |
| 140°   | 28.5  |
| 142.5° | 28.5  |
| 145°   | 28.5  |
| 147.5° | 28.5  |
| 150°   | 29.7  |
| 152.5° | 28.5  |
| 155°   | 28.5  |
| 157.5° | 27.3  |
| 160°   | 24.9  |
| 162.5° | 23.8  |
| 165°   | 22.6  |
| 167.5° | 21.4  |
| 170°   | 20.2  |
| 172.5° | 19.0  |
| 175°   | 17.8  |
| 177.5° | 17.8  |
| 180°   | 17.8  |

(END OF REPORT)