

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1504931

Luminaire Tested: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (6500K_L18_Narrow_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1504931
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-58)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (6500K_L18_Narrow_120V)
Description: PrentaLux UHBS2 6-INCH SELECTABLE HIGH BAY 1218 LIGHT ENGINE, CONIC WHITE SHADE, NARROW DISTRIBUTION
LIGHT LEVEL 1 - 18,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16243.7 lumens
Efficiency: N/A
Efficacy: 131.7 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 1
Luminous Opening: Circular (Dia: 1.3' x H: 0')
CIE Type: Direct

Input Watts (W): 123.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1504931

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (6500K_L18_Narrow_120V)

Luminous Intensity Polar Plot

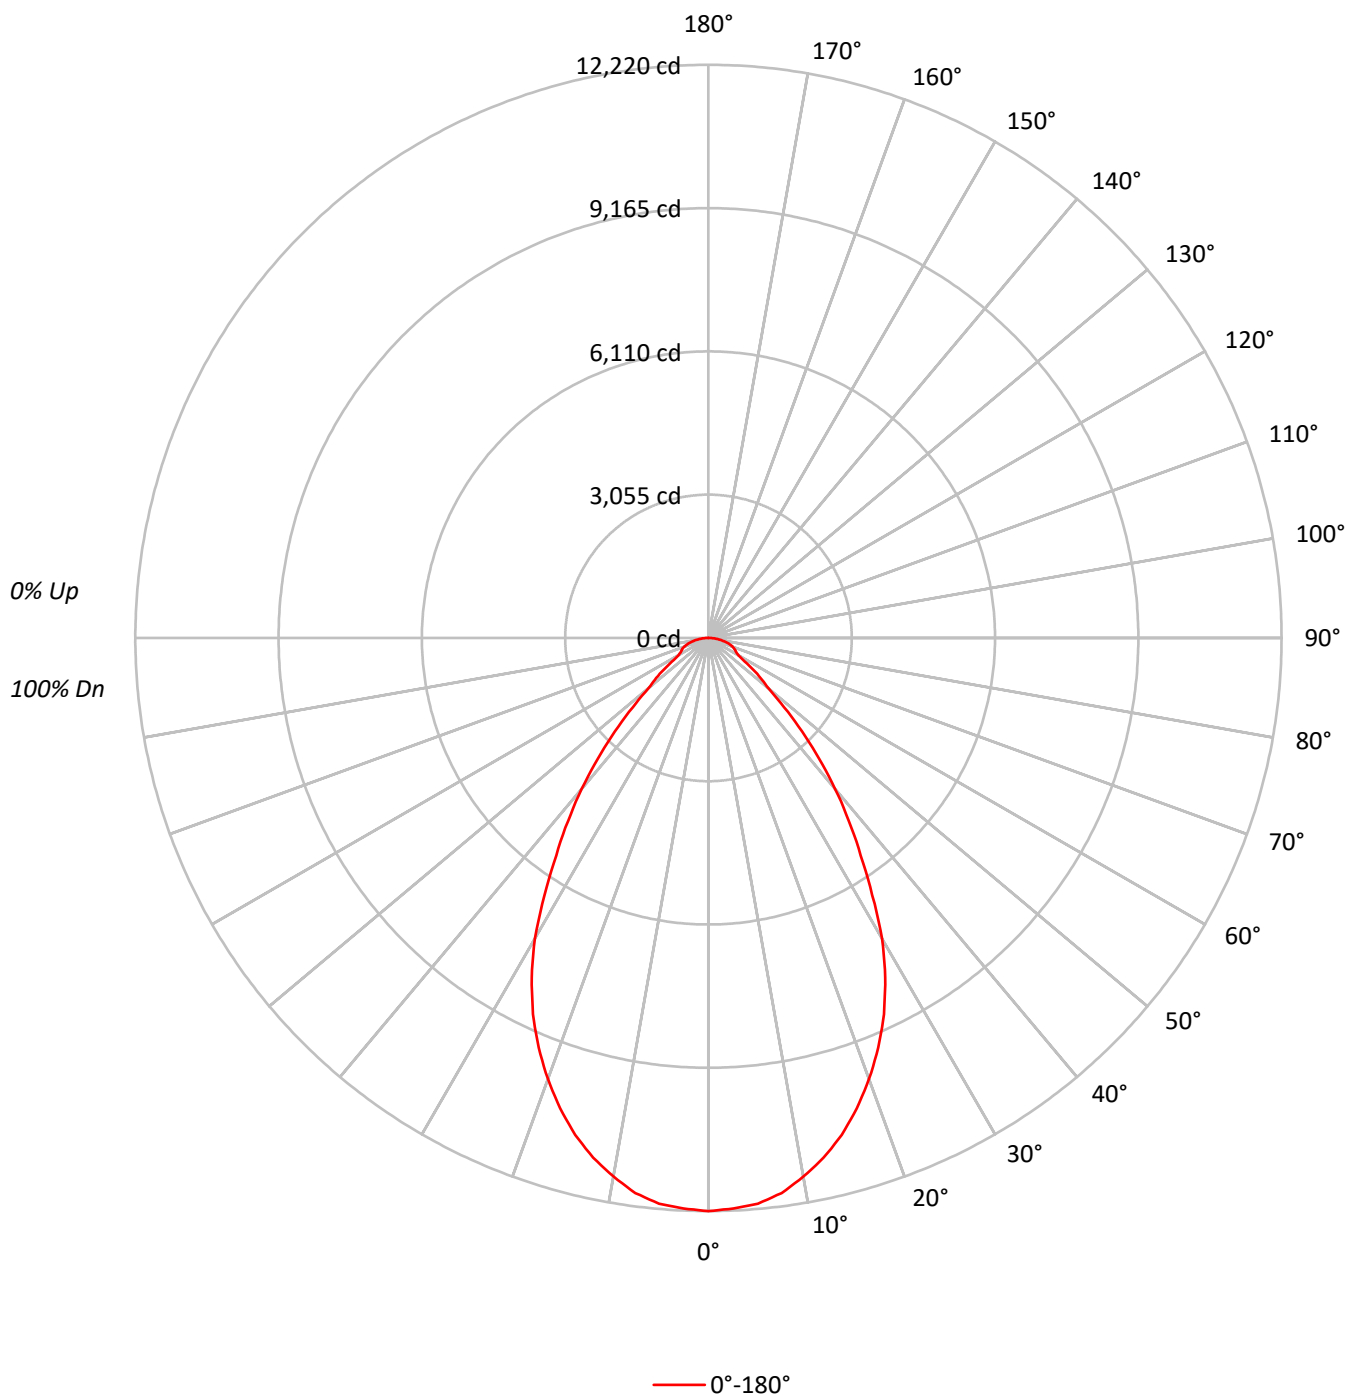



TEST NUMBER: P1504931

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (6500K_L18_Narrow_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90		
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80		
3	97	89	83	78	95	88	82	77	85	80	76	83	78	75	80	77	74	72		
4	91	82	75	70	89	81	74	69	78	73	68	76	71	68	74	70	67	65		
5	85	75	68	63	84	74	67	62	72	66	62	70	65	61	69	64	61	59		
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54		
7	75	64	57	52	74	64	57	52	62	56	52	61	55	51	60	55	51	49		
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46		
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42		
10	64	52	46	41	62	52	45	41	51	45	41	50	45	41	49	44	41	39		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	99100
5°	98553
10°	96040
15°	92087
20°	86376
25°	79187
30°	69371
35°	56047
40°	44496
45°	32356
50°	20942
55°	15889
60°	11949
65°	12133
70°	13074
75°	13379
80°	13258
85°	12989

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 32356 cd/sqm

TEST NUMBER: P1504931

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (6500K_L18_Narrow_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1141.5	7.0
10°-20°	3070.7	18.9
20°-30°	4035.2	24.8
30°-40°	3555.4	21.9
40°-50°	2186.2	13.5
50°-60°	1024.0	6.3
60°-70°	631.2	3.9
70°-80°	447.0	2.8
80°-90°	152.6	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8247.4	50.8
0°-40°	11802.8	72.7
0°-60°	15012.9	92.4
0°-90°	16243.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	16243.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12220	
5°	12106	###
15°	10968	3071
25°	8850	4035
35°	5661	3555
45°	2821	2186
55°	1124	1024
65°	632	631
75°	427	447
85°	140	153
90°	0	

TEST NUMBER: P1504931

CATALOG NUMBER: PRLX-UHBS2-1218-MV-L8C5-U-B-06-WHGL-PS (6500K_L18_Narrow_120V)

CANDELA DISTRIBUTION (FULL):

0°	
0°	12220.3
2.5°	12174.5
5°	12106.5
7.5°	11937.5
10°	11663.0
12.5°	11348.6
15°	10968.5
17.5°	10515.7
20°	10008.9
22.5°	9456.4
25°	8849.9
27.5°	8160.1
30°	7408.2
32.5°	6501.4
35°	5661.4
37.5°	4918.8
40°	4203.2
42.5°	3491.2
45°	2821.3
47.5°	2187.8
50°	1659.9
52.5°	1401.9
55°	1123.8
57.5°	878.7
60°	736.7
62.5°	673.4
65°	632.3
67.5°	598.3
70°	551.4
72.5°	493.9
75°	427.0
77.5°	355.5
80°	283.9
82.5°	211.2
85°	139.6
87.5°	68.0
90°	0.0

(END OF REPORT)