

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1505434

Luminaire Tested: PRLX-UHBS2-2436-MV-L8C5-U-B-04-WHGL-PS (3000K_L36_Medium_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1505434
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-98)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-2436-MV-L8C5-U-B-04-WHGL-PS (3000K_L36_Medium_120V)
Description: PrentaLux UHBS2 4-INCH SELECTABLE HIGH BAY 2436 LIGHT ENGINE, CONIC WHITE SHADE, MEDIUM DISTRIBUTION
LIGHT LEVEL 1 - 36,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 33565.7 lumens
Efficiency: N/A
Efficacy: 141.3 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.22 / 1.19
Luminous Opening: Circular (Dia: 1.38' x H: 0')
CIE Type: Direct

Input Watts (W): 237.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1505434

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-04-WHGL-PS (3000K_L36_Medium_120V)

Luminous Intensity Polar Plot

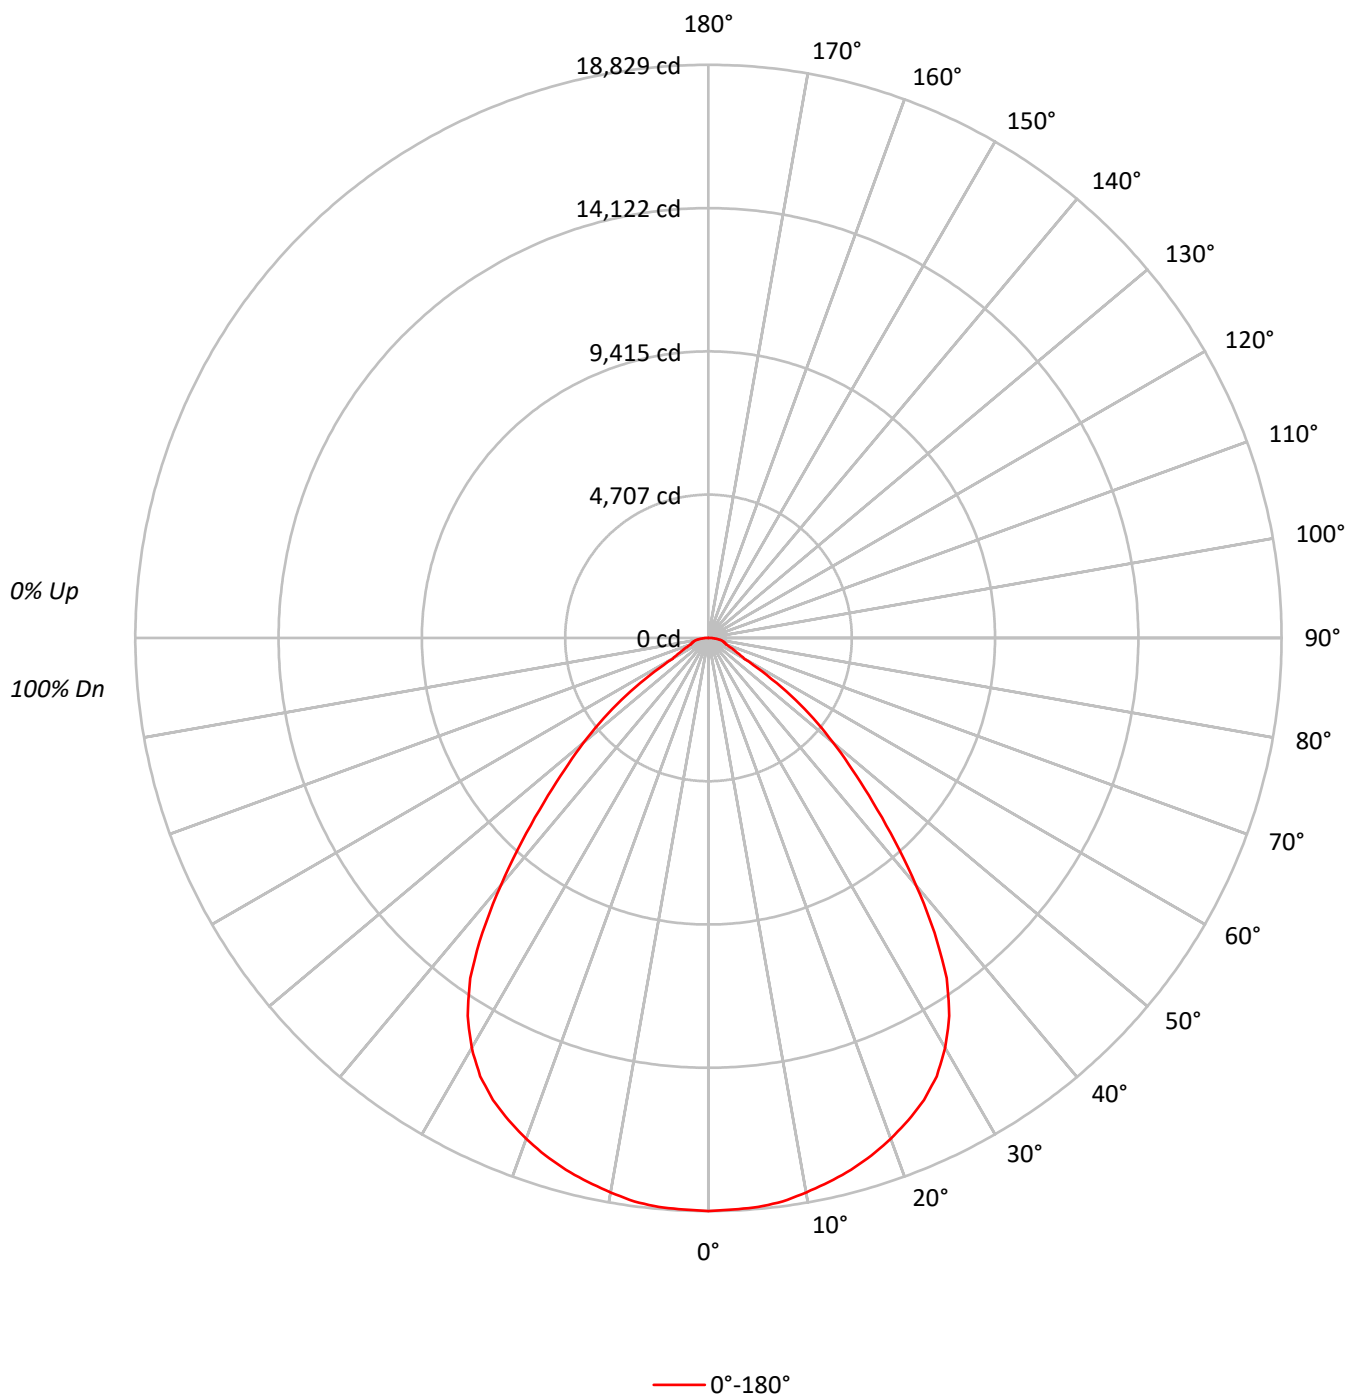



TEST NUMBER: P1505434

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-04-WHGL-PS (3000K_L36_Medium_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90		
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80		
3	97	89	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71		
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63		
5	84	74	66	61	82	73	66	60	71	64	60	69	63	59	67	62	59	57		
6	79	67	60	54	77	66	59	54	65	59	54	63	58	53	62	57	53	51		
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46		
8	69	57	50	45	68	57	50	45	55	49	44	54	48	44	53	48	44	42		
9	65	53	46	41	63	52	46	41	51	45	41	50	45	40	49	44	40	39		
10	61	49	42	38	60	49	42	37	48	42	37	47	41	37	46	41	37	36		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	134854
5°	134920
10°	134517
15°	134118
20°	133453
25°	132353
30°	128649
35°	119287
40°	99215
45°	77298
50°	59638
55°	41307
60°	19467
65°	15265
70°	13090
75°	14724
80°	17034
85°	19114

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 77298 cd/sqm

TEST NUMBER: P1505434

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-04-WHGL-PS (3000K_L36_Medium_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1783.0	5.3
10°-20°	5103.8	15.2
20°-30°	7688.9	22.9
30°-40°	8364.6	24.9
40°-50°	5961.5	17.8
50°-60°	2944.2	8.8
60°-70°	920.6	2.7
70°-80°	556.9	1.7
80°-90°	242.1	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	14575.7	43.4
0°-40°	22940.3	68.3
0°-60°	31846.1	94.9
0°-90°	33565.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	33565.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18829	
5°	18767	###
15°	18089	5104
25°	16749	7689
35°	13644	8365
45°	7632	5962
55°	3308	2944
65°	901	921
75°	532	557
85°	233	242
90°	0	

TEST NUMBER: P1505434

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-04-WHGL-PS (3000K_L36_Medium_120V)

CANDELA DISTRIBUTION (FULL):

	0°
0°	18829.4
2.5°	18792.0
5°	18767.0
7.5°	18675.2
10°	18497.0
12.5°	18306.4
15°	18088.6
17.5°	17820.9
20°	17510.0
22.5°	17152.6
25°	16748.8
27.5°	16234.8
30°	15556.4
32.5°	14719.1
35°	13643.6
37.5°	12201.6
40°	10612.2
42.5°	9061.3
45°	7631.8
47.5°	6404.3
50°	5352.6
52.5°	4341.8
55°	3308.2
57.5°	2275.8
60°	1359.1
62.5°	1099.3
65°	900.8
67.5°	736.3
70°	625.1
72.5°	574.1
75°	532.1
77.5°	483.3
80°	413.0
82.5°	329.0
85°	232.6
87.5°	121.4
90°	0.0

(END OF REPORT)