

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1505615

Luminaire Tested: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (3000K_L36_Narrow_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1505615
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-121)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (3000K_L36_Narrow_120V)
Description: PrentaLux UHBS2 6-INCH SELECTABLE HIGH BAY 2436 LIGHT ENGINE, CONIC WHITE SHADE, NARROW DISTRIBUTION
LIGHT LEVEL 1 - 36,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 31311.5 lumens
Efficiency: N/A
Efficacy: 131.8 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.99
Luminous Opening: Circular (Dia: 1.47' x H: 0')
CIE Type: Direct

Input Watts (W): 237.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1505615

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (3000K_L36_Narrow_120V)

Luminous Intensity Polar Plot

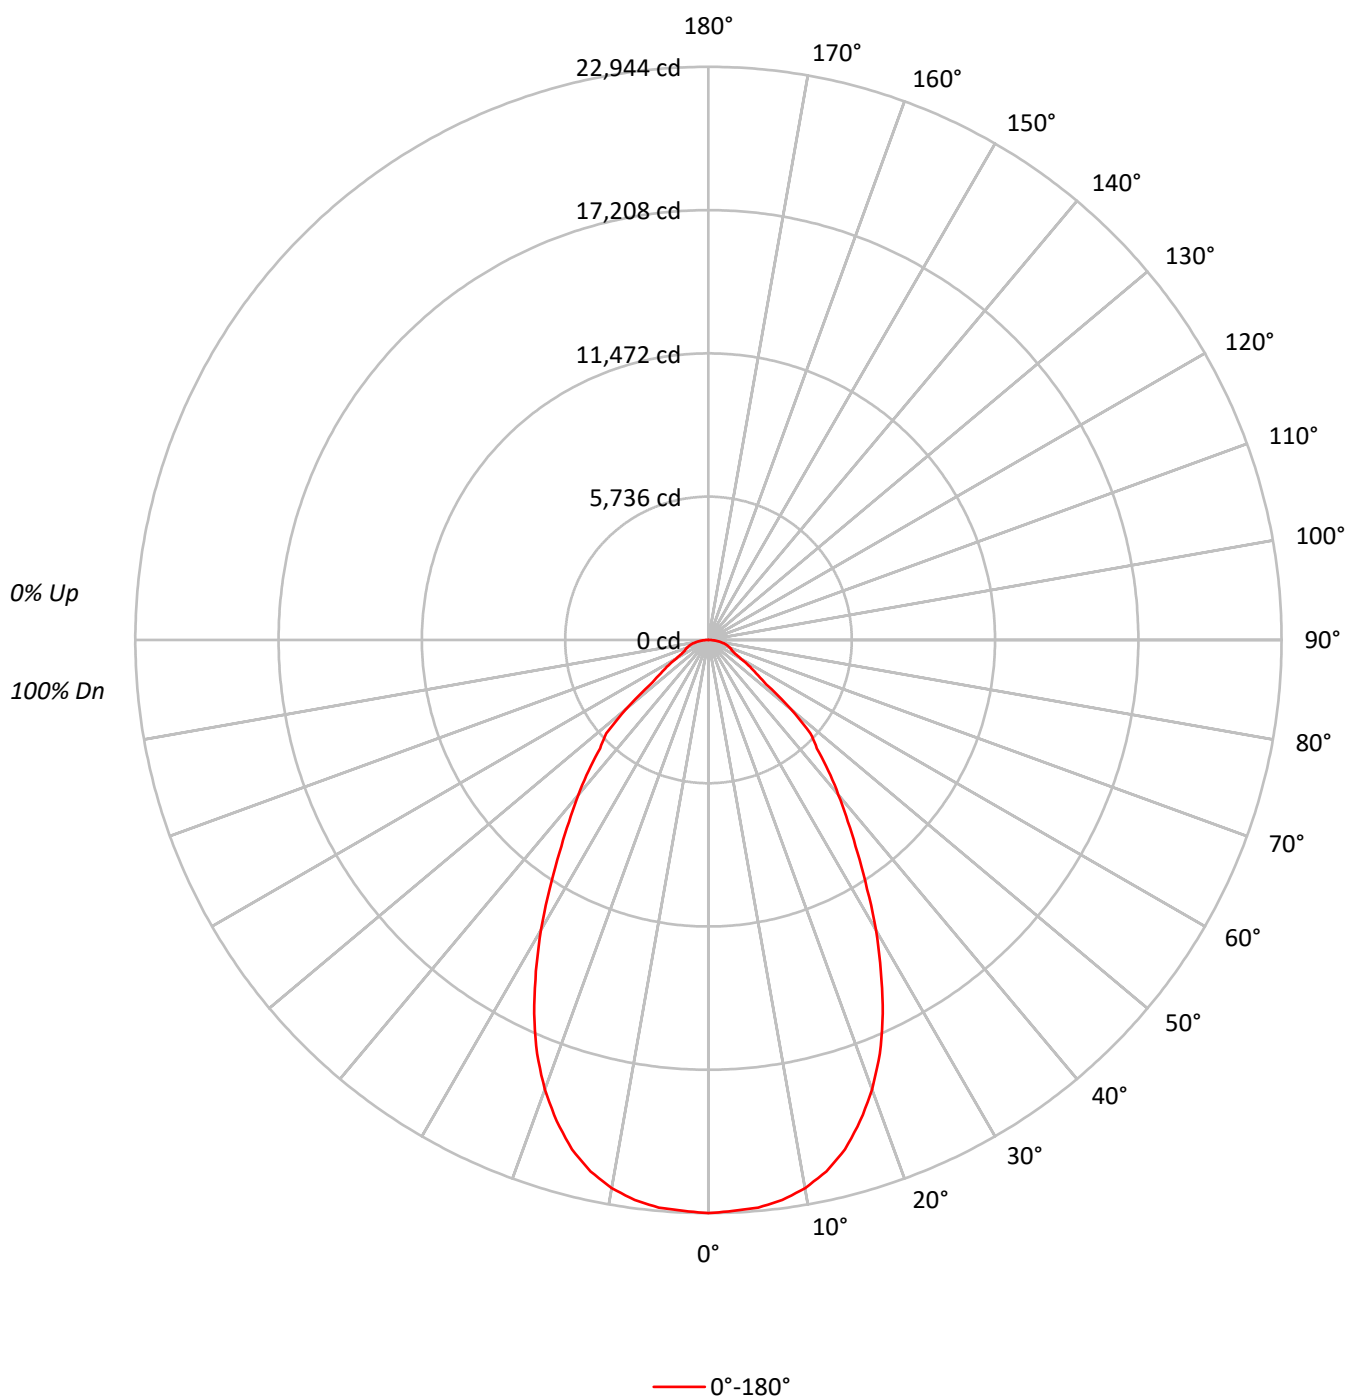



TEST NUMBER: P1505615

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (3000K_L36_Narrow_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90		
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80		
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	77	74	72		
4	91	82	75	69	89	80	74	69	78	73	68	76	71	67	74	70	66	65		
5	85	75	68	62	83	74	67	62	72	66	62	70	65	61	69	64	60	59		
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53		
7	75	64	57	52	74	63	56	52	62	56	51	61	55	51	59	54	51	49		
8	71	59	52	47	69	59	52	47	58	51	47	57	51	47	55	50	47	45		
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	42		
10	63	52	45	41	62	51	45	40	50	44	40	50	44	40	49	44	40	39		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	146181
5°	145869
10°	144158
15°	139245
20°	129818
25°	116057
30°	98595
35°	80809
40°	67295
45°	55322
50°	42900
55°	25847
60°	19198
65°	16060
70°	17203
75°	18182
80°	18191
85°	17829

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 55322 cd/sqm

TEST NUMBER: P1505615

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (3000K_L36_Narrow_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2160.4	6.9
10°-20°	5893.8	18.8
20°-30°	7519.7	24.0
30°-40°	6552.3	20.9
40°-50°	4802.1	15.3
50°-60°	2237.1	7.1
60°-70°	1110.3	3.5
70°-80°	768.4	2.5
80°-90°	267.5	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	15573.9	49.7
0°-40°	22126.1	70.7
0°-60°	29165.3	93.1
0°-90°	31311.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	31311.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	22944	
5°	22808	###
15°	21111	5894
25°	16509	7520
35°	10390	6552
45°	6140	4802
55°	2327	2237
65°	1065	1110
75°	739	768
85°	244	267
90°	0	

TEST NUMBER: P1505615

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (3000K_L36_Narrow_120V)

CANDELA DISTRIBUTION (FULL):

0°	
0°	22944.3
2.5°	22877.4
5°	22808.2
7.5°	22611.9
10°	22282.9
12.5°	21791.6
15°	21110.9
17.5°	20193.1
20°	19147.1
22.5°	17928.6
25°	16509.4
27.5°	14952.8
30°	13402.0
32.5°	11826.1
35°	10389.8
37.5°	9172.5
40°	8091.3
42.5°	7100.9
45°	6140.0
47.5°	5543.2
50°	4328.2
52.5°	2922.5
55°	2326.9
57.5°	1903.7
60°	1506.6
62.5°	1221.9
65°	1065.3
67.5°	985.9
70°	923.5
72.5°	841.8
75°	738.6
77.5°	621.7
80°	495.8
82.5°	369.8
85°	243.9
87.5°	121.4
90°	0.0

(END OF REPORT)