

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1505083

Luminaire Tested: PRLX-UHBS2-2436-MV-L8C5-U-A-04-WHGL-PS (3500K_L36_Medium_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1505083
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-86)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-2436-MV-L8C5-U-A-04-WHGL-PS (3500K_L36_Medium_120V)
Description: PrentaLux UHBS2 4-INCH SELECTABLE HIGH BAY 2436 LIGHT ENGINE, DOMIC WHITE SHADE, MEDIUM DISTRIBUTION
LIGHT LEVEL 1 - 36,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 34027.2 lumens
Efficiency: N/A
Efficacy: 144.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.17
Luminous Opening: Circular (Dia: 1.37' x H: 0')
CIE Type: Direct

Input Watts (W): 235.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1505083

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-04-WHGL-PS (3500K_L36_Medium_120V)

Luminous Intensity Polar Plot

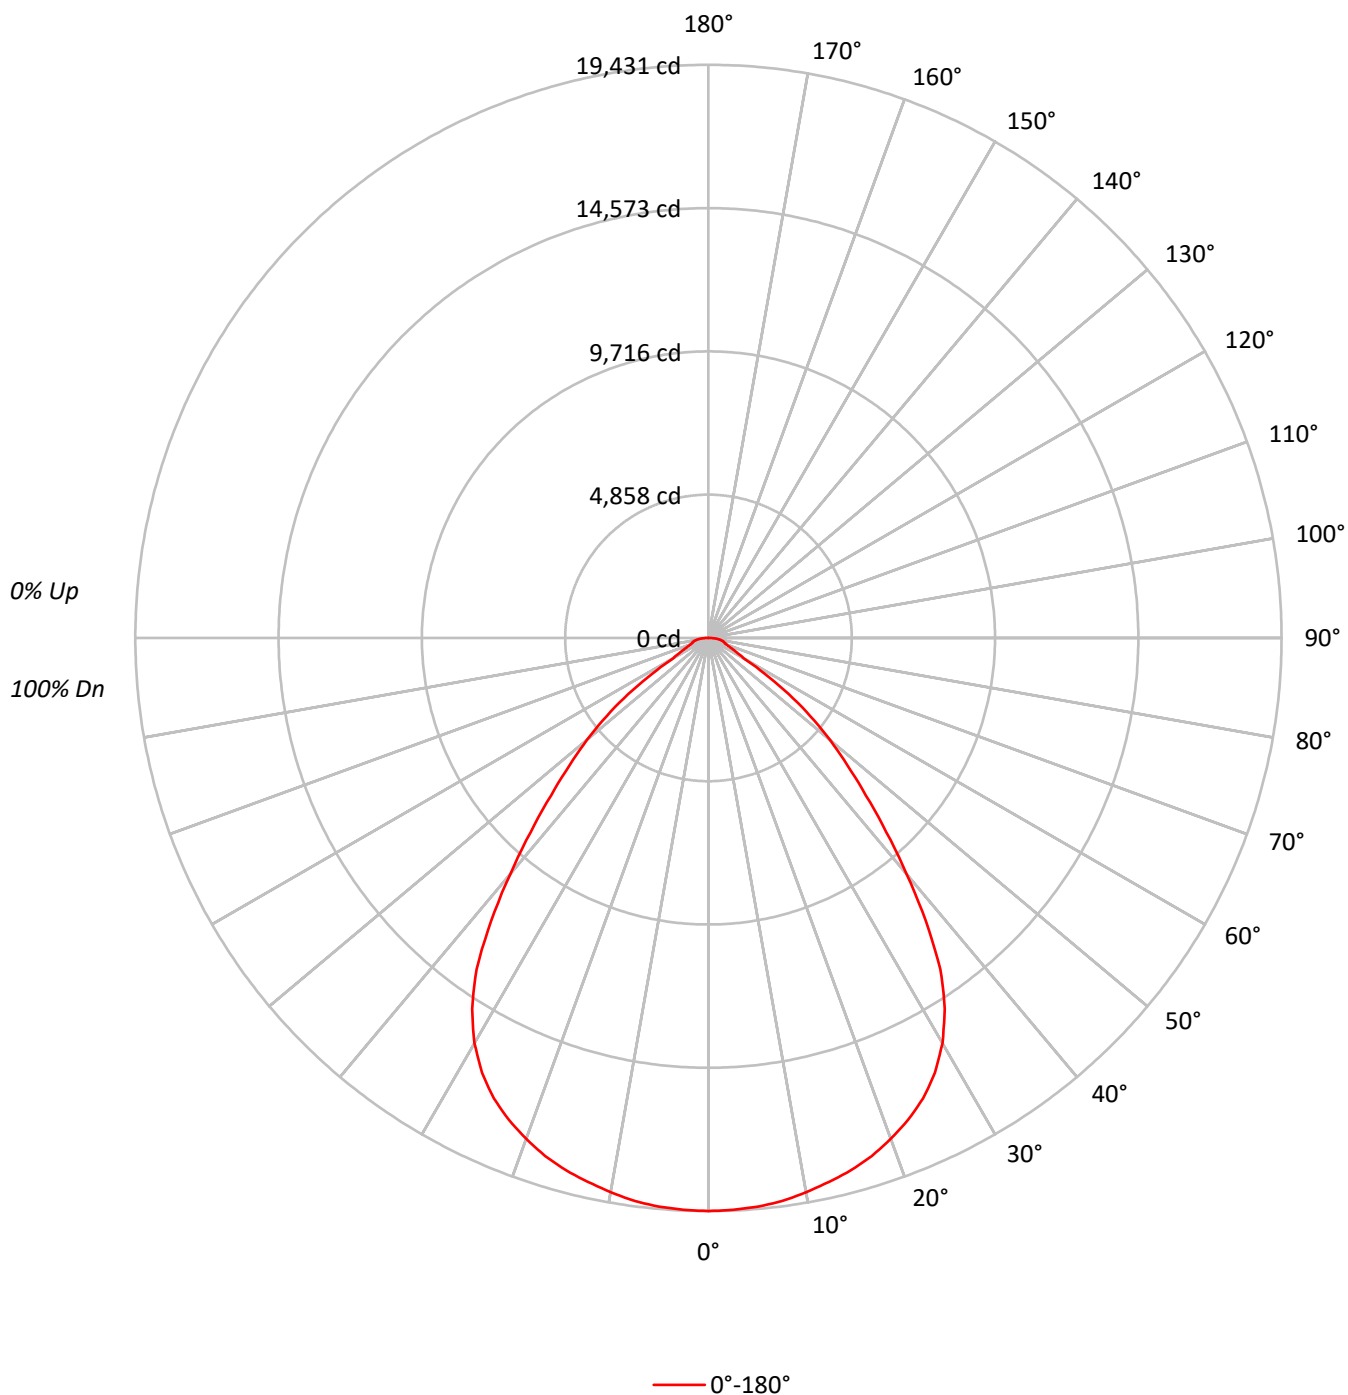

TEST NUMBER: P1505083

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-04-WHGL-PS (3500K_L36_Medium_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90		
2	104	98	93	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80		
3	97	89	82	77	95	87	81	76	84	79	75	82	78	74	79	76	73	71		
4	90	81	74	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63		
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57		
6	79	68	60	55	77	67	60	54	65	59	54	63	58	54	62	57	53	51		
7	74	62	55	49	72	61	54	49	60	54	49	59	53	49	57	52	48	47		
8	69	57	50	45	68	57	50	45	56	49	45	54	49	44	53	48	44	43		
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39		
10	61	49	42	38	60	49	42	38	48	42	38	47	42	37	46	41	37	36		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	142580
5°	142577
10°	142164
15°	141932
20°	141111
25°	139429
30°	134411
35°	122797
40°	100200
45°	78262
50°	61332
55°	42441
60°	20334
65°	15925
70°	13666
75°	15488
80°	18516
85°	21729

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 78262 cd/sqm

TEST NUMBER: P1505083

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-04-WHGL-PS (3500K_L36_Medium_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1838.9	5.4
10°-20°	5269.9	15.5
20°-30°	7897.0	23.2
30°-40°	8395.8	24.7
40°-50°	5902.1	17.3
50°-60°	2947.4	8.7
60°-70°	936.8	2.8
70°-80°	574.0	1.7
80°-90°	265.3	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	15005.8	44.1
0°-40°	23401.5	68.8
0°-60°	32251.0	94.8
0°-90°	34027.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	34027.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	19431	
5°	19357	###
15°	18684	5270
25°	17222	7897
35°	13709	8396
45°	7542	5902
55°	3318	2947
65°	917	937
75°	546	574
85°	258	265
90°	0	

TEST NUMBER: P1505083

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-04-WHGL-PS (3500K_L36_Medium_120V)

CANDELA DISTRIBUTION (FULL):

0°	
0°	19431.4
2.5°	19401.2
5°	19357.0
7.5°	19250.1
10°	19080.4
12.5°	18889.7
15°	18684.0
17.5°	18414.3
20°	18071.4
22.5°	17685.4
25°	17221.6
27.5°	16624.1
30°	15863.9
32.5°	14909.5
35°	13708.7
37.5°	12105.7
40°	10460.8
42.5°	8925.2
45°	7541.9
47.5°	6378.3
50°	5372.8
52.5°	4359.2
55°	3317.6
57.5°	2241.2
60°	1385.6
62.5°	1118.3
65°	917.2
67.5°	747.5
70°	637.0
72.5°	585.9
75°	546.3
77.5°	503.3
80°	438.2
82.5°	355.7
85°	258.1
87.5°	141.8
90°	0.0

(END OF REPORT)