

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1505273

Luminaire Tested: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (4000K_L36_Narrow_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1505273
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-109)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (4000K_L36_Narrow_120V)
Description: PrentaLux UHBS2 6-INCH SELECTABLE HIGH BAY 2436 LIGHT ENGINE, DOMIC WHITE SHADE, NARROW DISTRIBUTION
LIGHT LEVEL 1 - 36,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 33541.3 lumens
Efficiency: N/A
Efficacy: 144.6 lumens/watt
Spacing Criteria (0/90/45): 1.04 / 1.04 / 1.03
Luminous Opening: Circular (Dia: 1.43' x H: 0')
CIE Type: Direct

Input Watts (W): 231.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1505273

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (4000K_L36_Narrow_120V)

Luminous Intensity Polar Plot

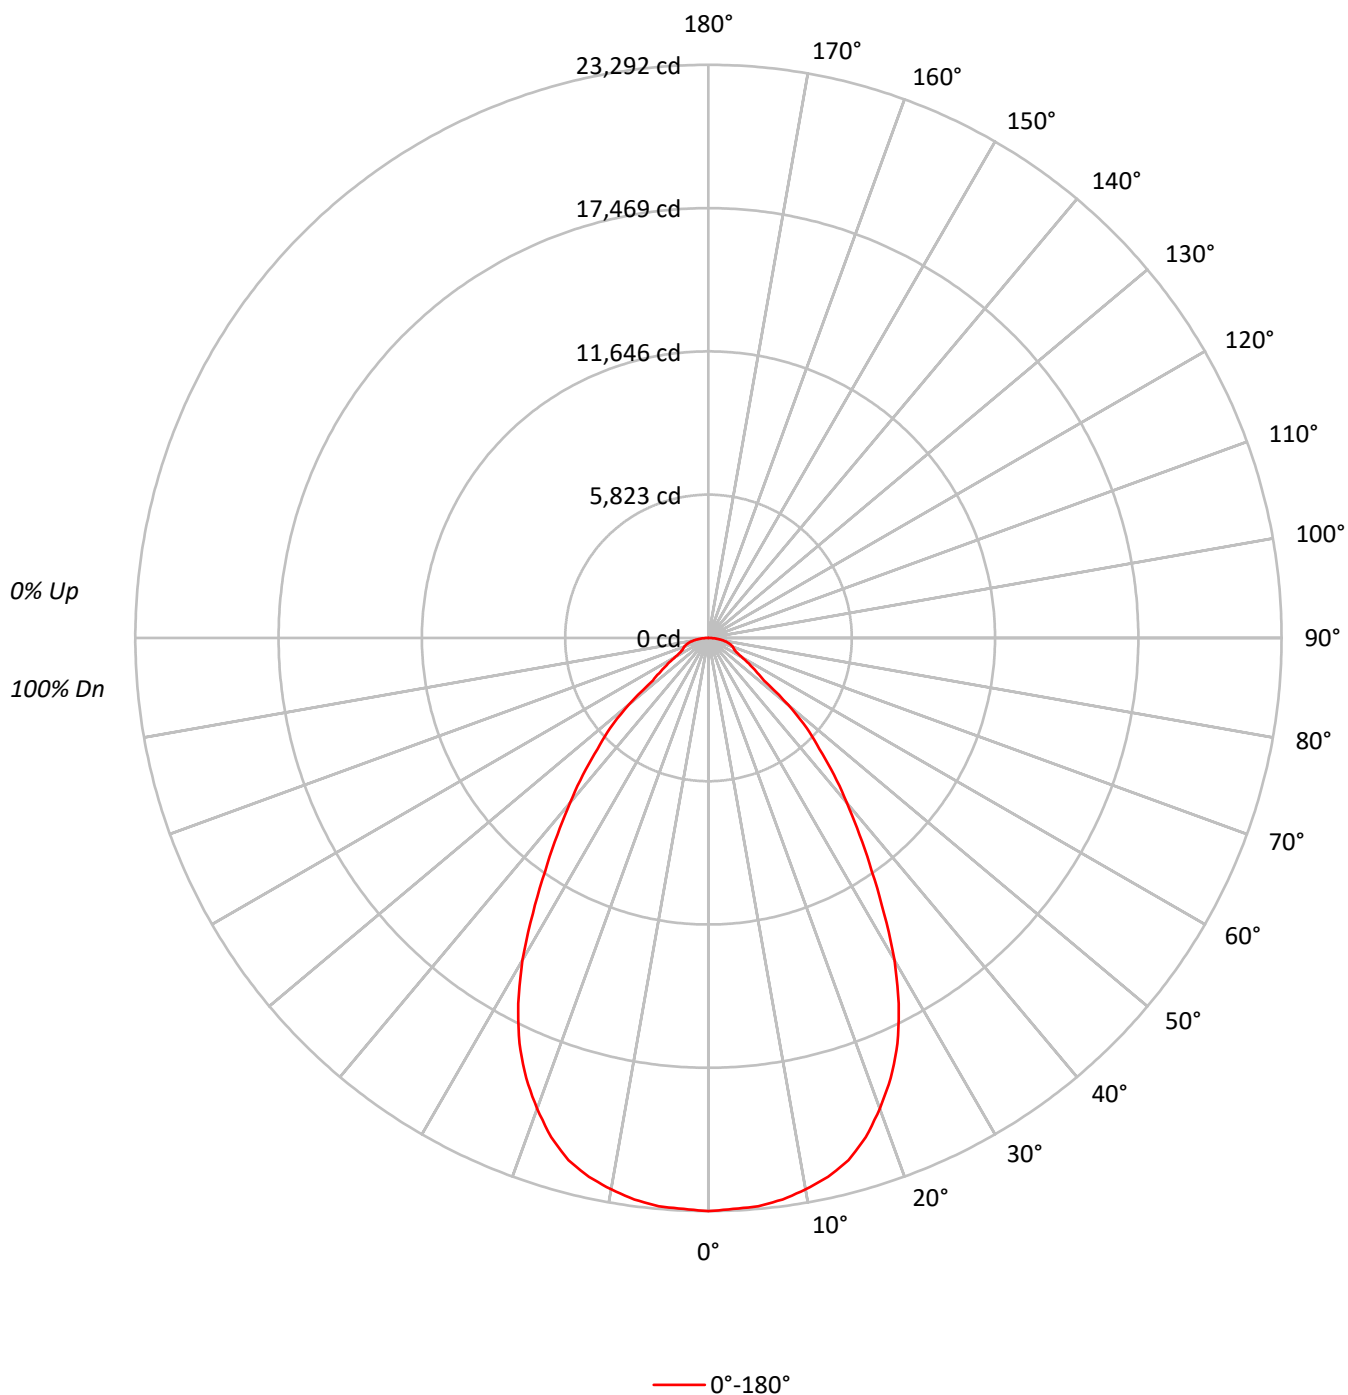



TEST NUMBER: P1505273

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (4000K_L36_Narrow_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89		
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80		
3	97	89	83	78	95	88	82	77	85	80	76	82	78	74	80	76	73	71		
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64		
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58		
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53		
7	75	64	57	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49		
8	71	59	52	47	69	59	52	47	57	51	47	56	51	47	55	50	46	45		
9	67	55	48	44	65	55	48	43	54	48	43	53	47	43	52	47	43	41		
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	43	40	38		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	155381
5°	155237
10°	154169
15°	151781
20°	144499
25°	133797
30°	116460
35°	94330
40°	76143
45°	60191
50°	43982
55°	27434
60°	20921
65°	18560
70°	20382
75°	22285
80°	23538
85°	24562

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 60191 cd/sqm

TEST NUMBER: P1505273

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (4000K_L36_Narrow_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2199.2	6.6
10°-20°	6148.2	18.3
20°-30°	8263.0	24.6
30°-40°	7282.4	21.7
40°-50°	4957.4	14.8
50°-60°	2235.9	6.7
60°-70°	1211.5	3.6
70°-80°	900.0	2.7
80°-90°	343.7	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	16610.4	49.5
0°-40°	23892.8	71.2
0°-60°	31086.1	92.7
0°-90°	33541.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	33541.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	23292	
5°	23182	###
15°	21977	6148
25°	18178	8263
35°	11583	7282
45°	6380	4957
55°	2359	2236
65°	1176	1212
75°	865	900
85°	321	344
90°	0	

TEST NUMBER: P1505273

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (4000K_L36_Narrow_120V)

CANDELA DISTRIBUTION (FULL):

0°	
0°	23292.3
2.5°	23226.9
5°	23182.1
7.5°	23021.0
10°	22759.5
12.5°	22436.2
15°	21977.3
17.5°	21270.1
20°	20354.7
22.5°	19361.8
25°	18177.6
27.5°	16743.9
30°	15118.9
32.5°	13280.8
35°	11583.2
37.5°	10073.2
40°	8743.7
42.5°	7552.2
45°	6380.1
47.5°	5422.3
50°	4238.0
52.5°	2850.4
55°	2358.8
57.5°	1945.9
60°	1568.1
62.5°	1310.2
65°	1175.8
67.5°	1101.9
70°	1045.0
72.5°	967.5
75°	864.6
77.5°	748.3
80°	612.7
82.5°	471.0
85°	320.9
87.5°	164.7
90°	0.0

(END OF REPORT)