

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1505284

Luminaire Tested: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (6500K_L24_Medium_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1505284
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-110)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (6500K_L24_Medium_120V)
Description: PrentaLux UHBS2 6-INCH SELECTABLE HIGH BAY 2436 LIGHT ENGINE, DOMIC WHITE
SHADE, MEDIUM DISTRIBUTION
LIGHT LEVEL 1 - 24,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 24146.0 lumens
Efficiency: N/A
Efficacy: 151.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.13
Luminous Opening: Circular (Dia: 1.43' x H: 0')
CIE Type: Direct

Input Watts (W): 159.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1505284

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (6500K_L24_Medium_120V)

Luminous Intensity Polar Plot

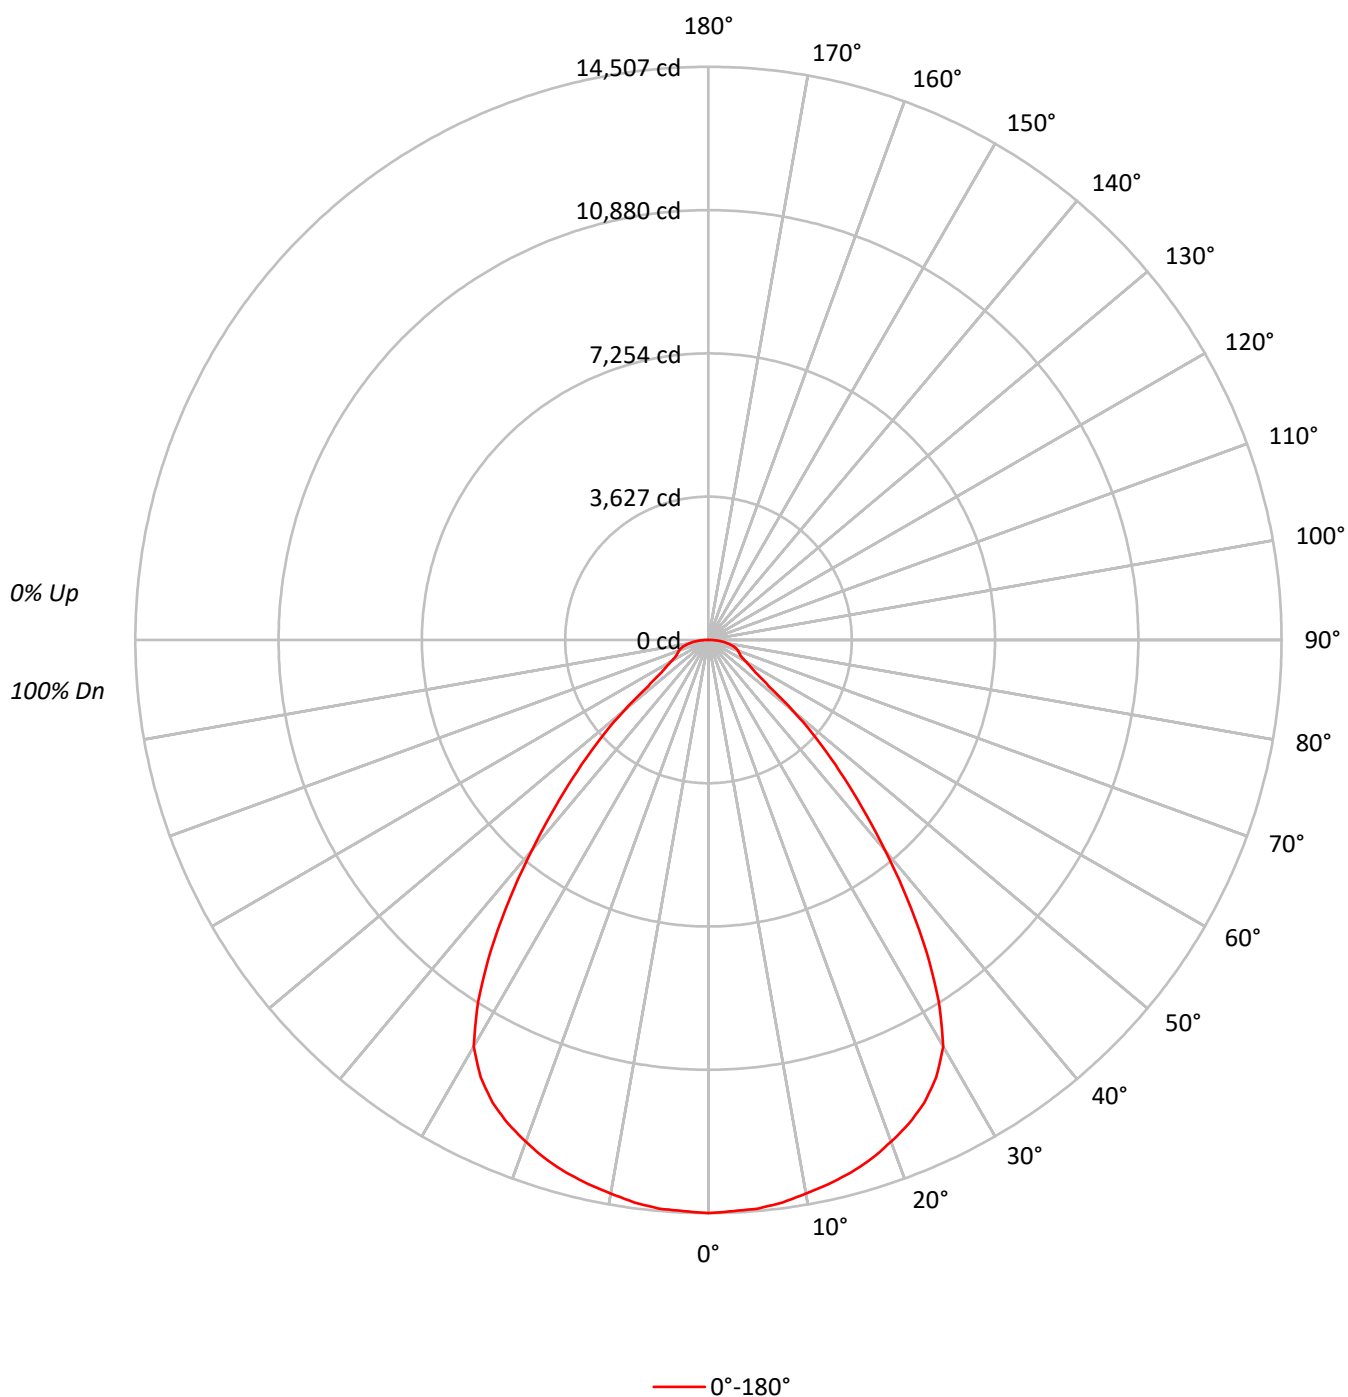



TEST NUMBER: P1505284

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (6500K_L24_Medium_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89		
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79		
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71		
4	90	81	74	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63		
5	84	74	67	61	83	73	66	61	71	65	60	69	64	60	67	63	59	57		
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52		
7	74	63	55	50	73	62	55	50	61	54	50	59	54	49	58	53	49	47		
8	70	58	51	46	68	57	51	46	56	50	45	55	49	45	54	49	45	43		
9	66	54	47	42	64	53	47	42	52	46	42	51	46	42	50	45	41	40		
10	62	50	43	39	61	50	43	39	49	43	39	48	42	38	47	42	38	37		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	96774
5°	96735
10°	96373
15°	96355
20°	95940
25°	95139
30°	91548
35°	78244
40°	60482
45°	44266
50°	28934
55°	17149
60°	14551
65°	13925
70°	15570
75°	17320
80°	19012
85°	20298

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 44266 cd/sqm

TEST NUMBER: P1505284

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (6500K_L24_Medium_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1371.8	5.7
10°-20°	3936.0	16.3
20°-30°	5921.4	24.5
30°-40°	5929.2	24.6
40°-50°	3642.9	15.1
50°-60°	1467.7	6.1
60°-70°	895.5	3.7
70°-80°	700.1	2.9
80°-90°	281.4	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	11229.3	46.5
0°-40°	17158.5	71.1
0°-60°	22269.1	92.2
0°-90°	24146.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	24146.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14507	
5°	14446	###
15°	13952	3936
25°	12926	5921
35°	9608	5929
45°	4692	3643
55°	1474	1468
65°	882	895
75°	672	700
85°	265	281
90°	0	

TEST NUMBER: P1505284

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-A-06-WHGL-PS (6500K_L24_Medium_120V)

CANDELA DISTRIBUTION (FULL):

0°	
0°	14506.8
2.5°	14470.4
5°	14445.8
7.5°	14360.2
10°	14227.2
12.5°	14100.9
15°	13951.8
17.5°	13760.2
20°	13514.5
22.5°	13251.8
25°	12925.5
27.5°	12481.5
30°	11884.9
32.5°	10846.9
35°	9607.9
37.5°	8275.0
40°	6945.4
42.5°	5746.3
45°	4692.1
47.5°	3734.5
50°	2788.0
52.5°	1927.9
55°	1474.5
57.5°	1261.8
60°	1090.6
62.5°	951.6
65°	882.2
67.5°	837.2
70°	798.3
72.5°	743.2
75°	672.0
77.5°	589.8
80°	494.9
82.5°	387.3
85°	265.2
87.5°	133.9
90°	0.0

(END OF REPORT)