

Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1505648

Luminaire Tested: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (6500K_L32_Narrow_120V)

Issue Date: 7/31/2026

Test Information

Test Method: LM-79-2024
Report Number: P1505648
TEST IS SCALED FROM IESNA LM-79-24 TEST DATA (G2-2602-677-121)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/31/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (6500K_L32_Narrow_120V)
Description: PrentaLux UHBS2 6-INCH SELECTABLE HIGH BAY 2436 LIGHT ENGINE, CONIC WHITE SHADE, NARROW DISTRIBUTION
LIGHT LEVEL 2 - 32,000 LUMENS
Light Source:
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 28135.8 lumens
Efficiency: N/A
Efficacy: 140.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.99
Luminous Opening: Circular (Dia: 1.47' x H: 0')
CIE Type: Direct

Input Watts (W): 200.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1505648

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (6500K_L32_Narrow_120V)

Luminous Intensity Polar Plot

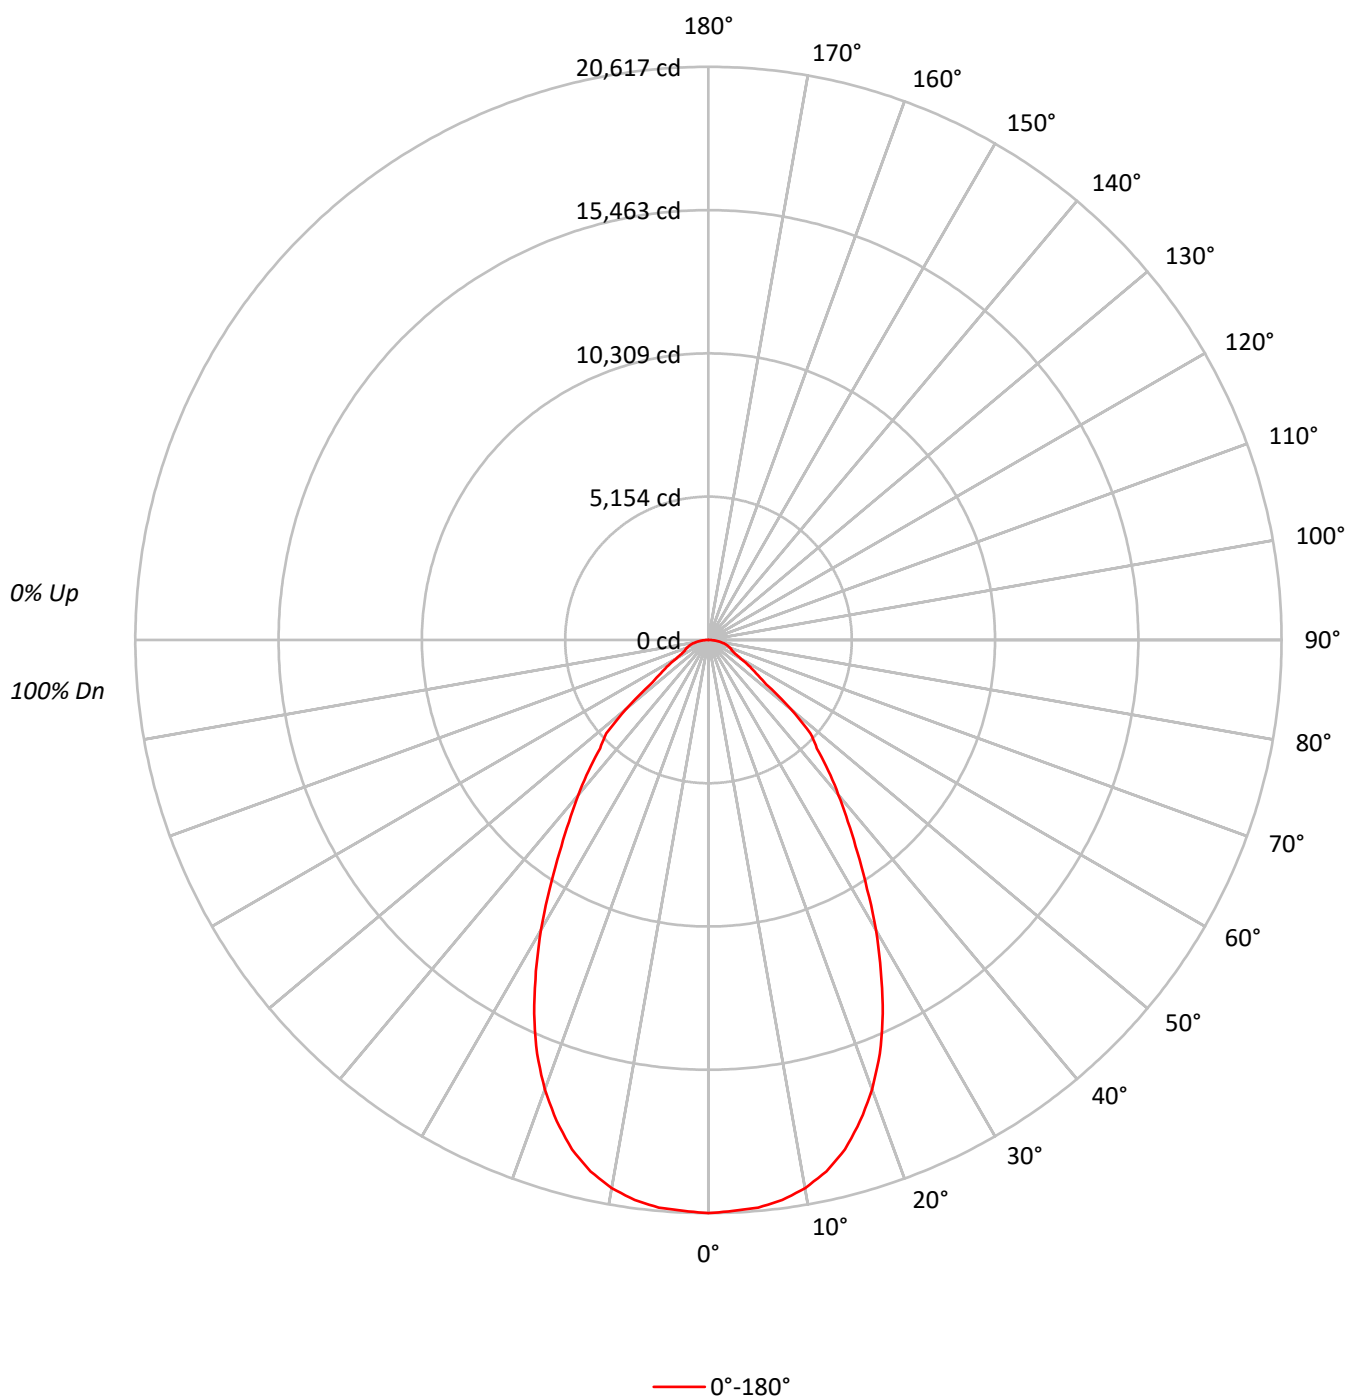



TEST NUMBER: P1505648

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (6500K_L32_Narrow_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90		
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80		
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	77	74	72		
4	91	82	75	69	89	80	74	69	78	73	68	76	71	67	74	70	66	65		
5	85	75	68	62	83	74	67	62	72	66	62	70	65	61	69	64	60	59		
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53		
7	75	64	57	52	74	63	56	52	62	56	51	61	55	51	59	54	51	49		
8	71	59	52	47	69	59	52	47	58	51	47	57	51	47	55	50	47	45		
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	42		
10	63	52	45	41	62	51	45	40	50	44	40	50	44	40	49	44	40	39		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	131355
5°	131075
10°	129537
15°	125123
20°	116652
25°	104287
30°	88595
35°	72614
40°	60470
45°	49711
50°	38549
55°	23225
60°	17251
65°	14432
70°	15457
75°	16338
80°	16345
85°	16024

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 49711 cd/sqm

TEST NUMBER: P1505648

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (6500K_L32_Narrow_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1941.3	6.9
10°-20°	5296.0	18.8
20°-30°	6757.0	24.0
30°-40°	5887.7	20.9
40°-50°	4315.0	15.3
50°-60°	2010.2	7.1
60°-70°	997.7	3.5
70°-80°	690.5	2.5
80°-90°	240.4	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	13994.4	49.7
0°-40°	19882.1	70.7
0°-60°	26207.3	93.1
0°-90°	28135.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	28135.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20617	
5°	20495	###
15°	18970	5296
25°	14835	6757
35°	9336	5888
45°	5517	4315
55°	2091	2010
65°	957	998
75°	664	690
85°	219	240
90°	0	

TEST NUMBER: P1505648

CATALOG NUMBER: PRLX-UHBS2-2436-MV-L8C5-U-B-06-WHGL-PS (6500K_L32_Narrow_120V)

CANDELA DISTRIBUTION (FULL):

0°	
0°	20617.2
2.5°	20557.1
5°	20494.9
7.5°	20318.5
10°	20022.9
12.5°	19581.5
15°	18969.8
17.5°	18145.1
20°	17205.2
22.5°	16110.3
25°	14835.0
27.5°	13436.3
30°	12042.7
32.5°	10626.7
35°	9336.1
37.5°	8242.2
40°	7270.7
42.5°	6380.7
45°	5517.2
47.5°	4981.0
50°	3889.2
52.5°	2626.1
55°	2090.9
57.5°	1710.6
60°	1353.8
62.5°	1097.9
65°	957.3
67.5°	885.9
70°	829.8
72.5°	756.4
75°	663.7
77.5°	558.7
80°	445.5
82.5°	332.3
85°	219.2
87.5°	109.1
90°	0.0

(END OF REPORT)