

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P156850

Luminaire Tested: **AVS-E01-LED-E-U-T4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P156850
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33673)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-E01-LED-E-U-T4
Description: VISION SITE SMALL LED LUMINAIRE
(1) LIGHTBARS WITH AccuLED OPTICS - TYPE 4 SHORT
Light Source: (21) 4000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3022 lumens
Efficiency: N/A
Efficacy: 122.3 lumens/watt
Luminous Opening: Rectangular (W 0.17' x L: 1' x H: 0')
IES Classification: Type IV - Short - Semi-Cutoff
BUG Rating: B1 - U0 - G1

Input Watts (W): 24.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P156850

CATALOG NUMBER: AVS-E01-LED-E-U-T4

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

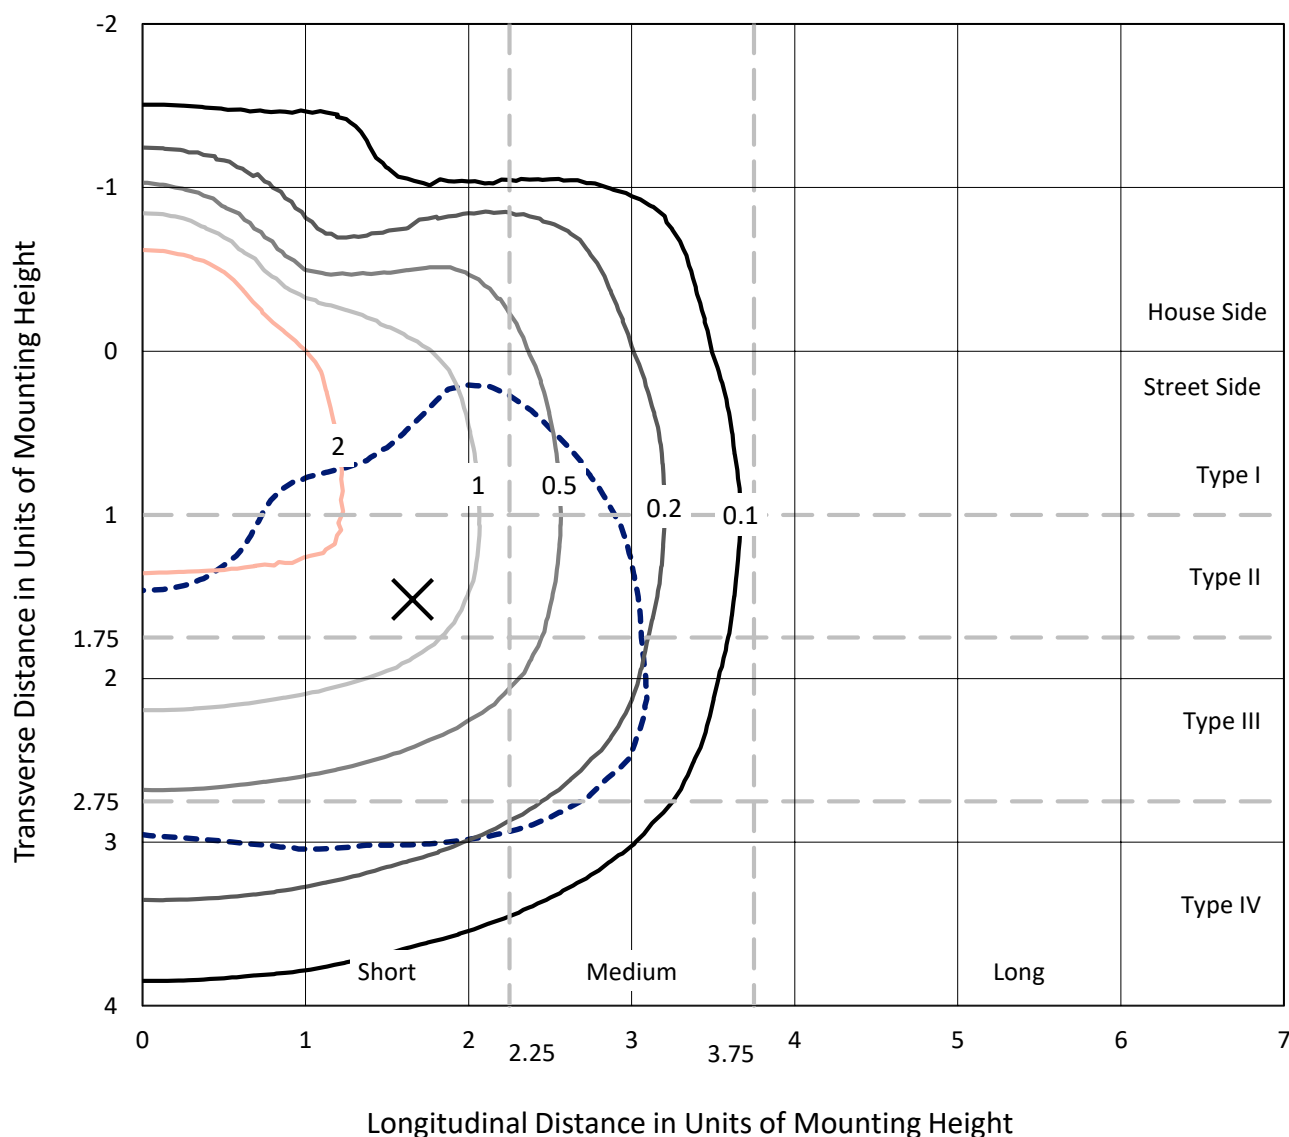


Based on 10 foot mounting height. Maximum calculated value = 4.2 fc
 Type IV - Short - Semi-Cutoff

REPORT NUMBER: P156850

CATALOG NUMBER: AVS-E01-LED-E-U-T4

Luminous Intensity Polar Plot

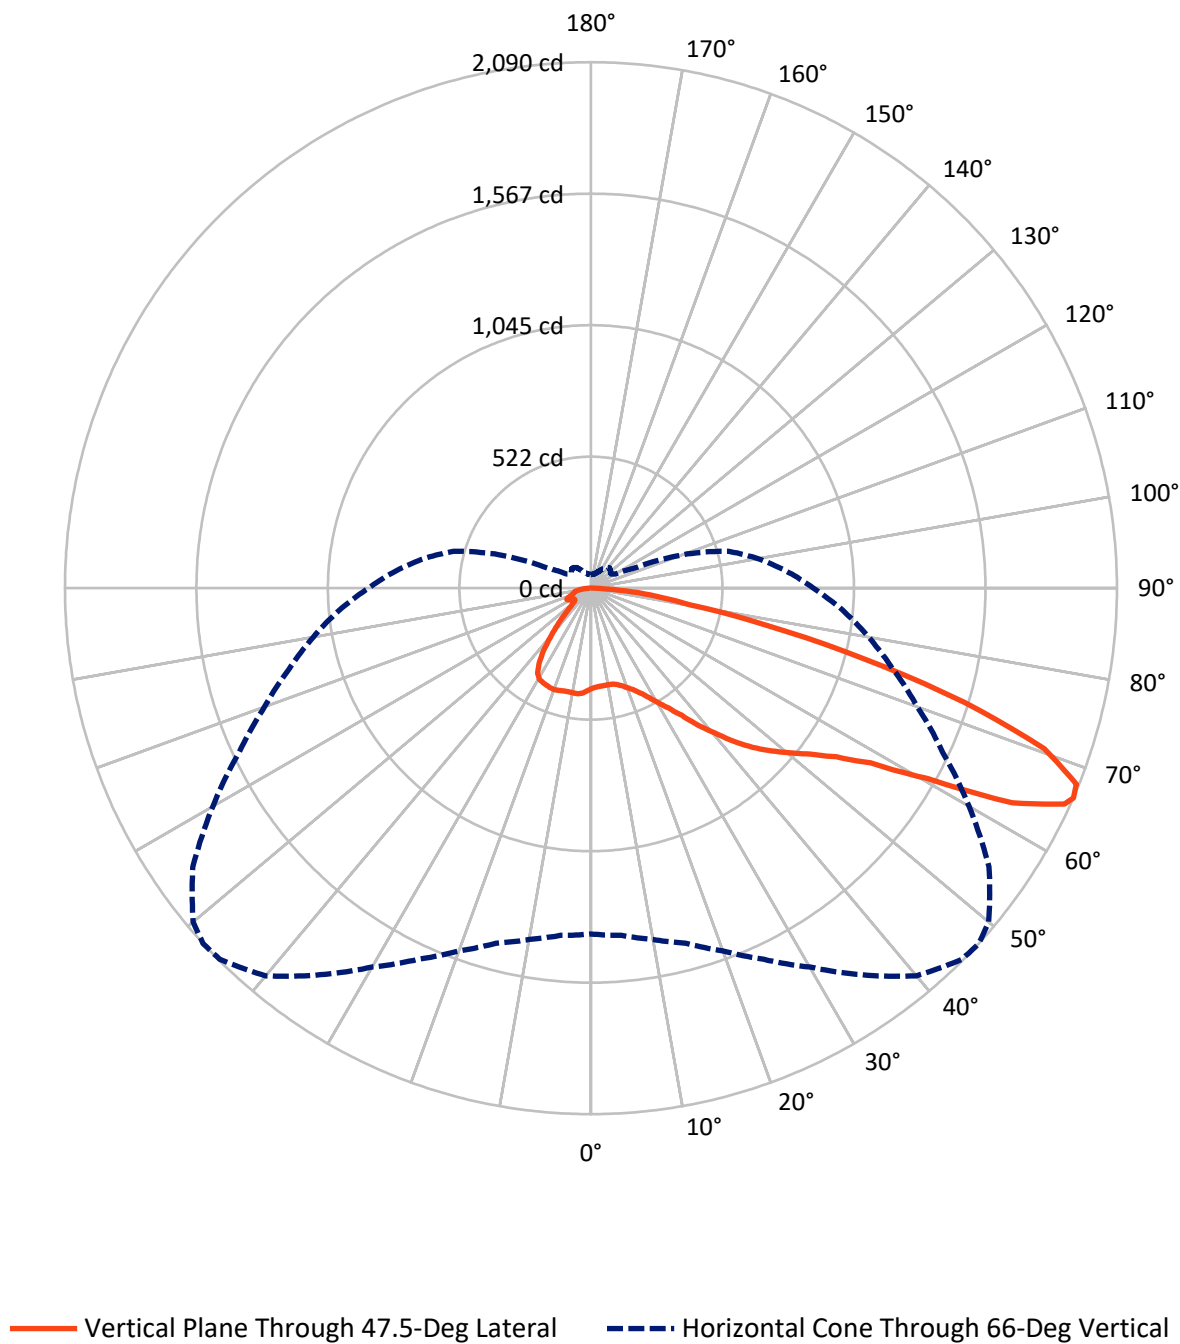

REPORT NUMBER: P156850

CATALOG NUMBER: AVS-E01-LED-E-U-T4


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	644.8	0.0	644.8
	% Fixture	21.3	0.0	21.3
Street Side	Lumens	2377.2	0.0	2377.2
	% Fixture	78.7	0.0	78.7
Total	Lumens	3022.0	0.0	3022.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.7	1.3
10°-20°	117.4	3.9
20°-30°	202.3	6.7
30°-40°	306.0	10.1
40°-50°	396.7	13.1
50°-60°	546.9	18.1
60°-70°	849.7	28.1
70°-80°	494.1	16.3
80°-90°	70.3	2.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	3022.0	100.0
0°-180°	3022.0	100.0

Coefficient of Utilization

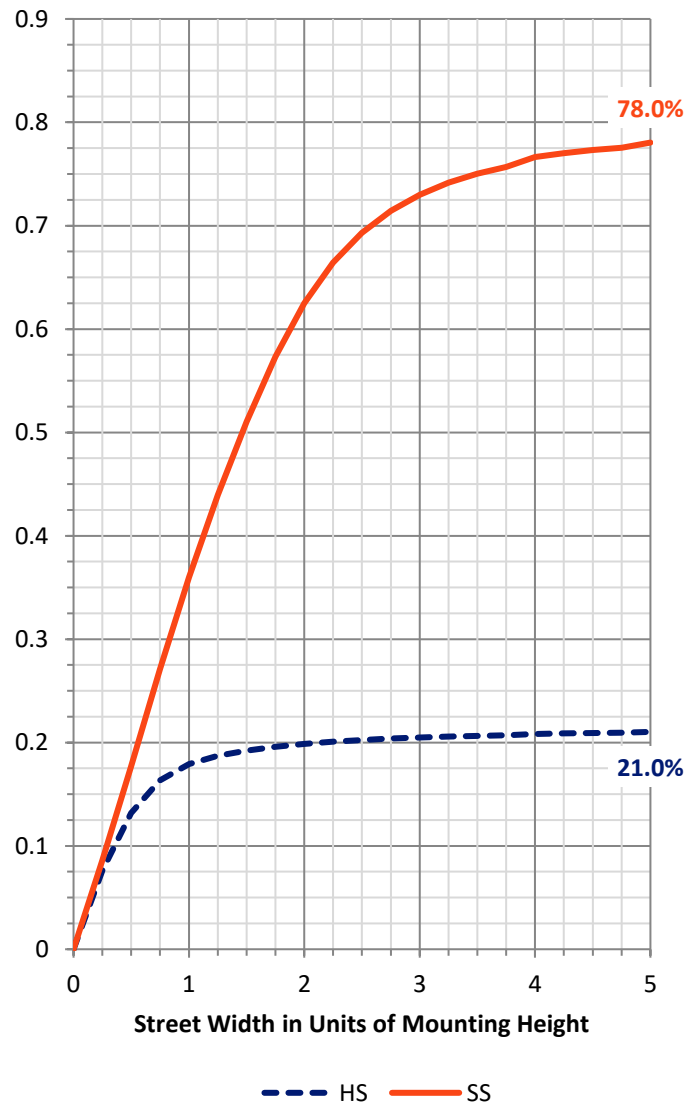

REPORT NUMBER: P156850


CATALOG NUMBER: AVS-E01-LED-E-U-T4

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	185.8	6.1			
FM	(30°-60°)	970.1	32.1			
FH	(60°-80°)	1167.4	38.6			G1/1800
FVH	(80°-90°)	53.9	1.8			G1/100
BL	(0°-30°)	172.6	5.7	B1/500		
BM	(30°-60°)	279.5	9.2	B1/1000		
BH	(60°-80°)	176.4	5.8	B1/500		G1/500
BVH	(80°-90°)	16.3	0.5			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G1

Type IV Short

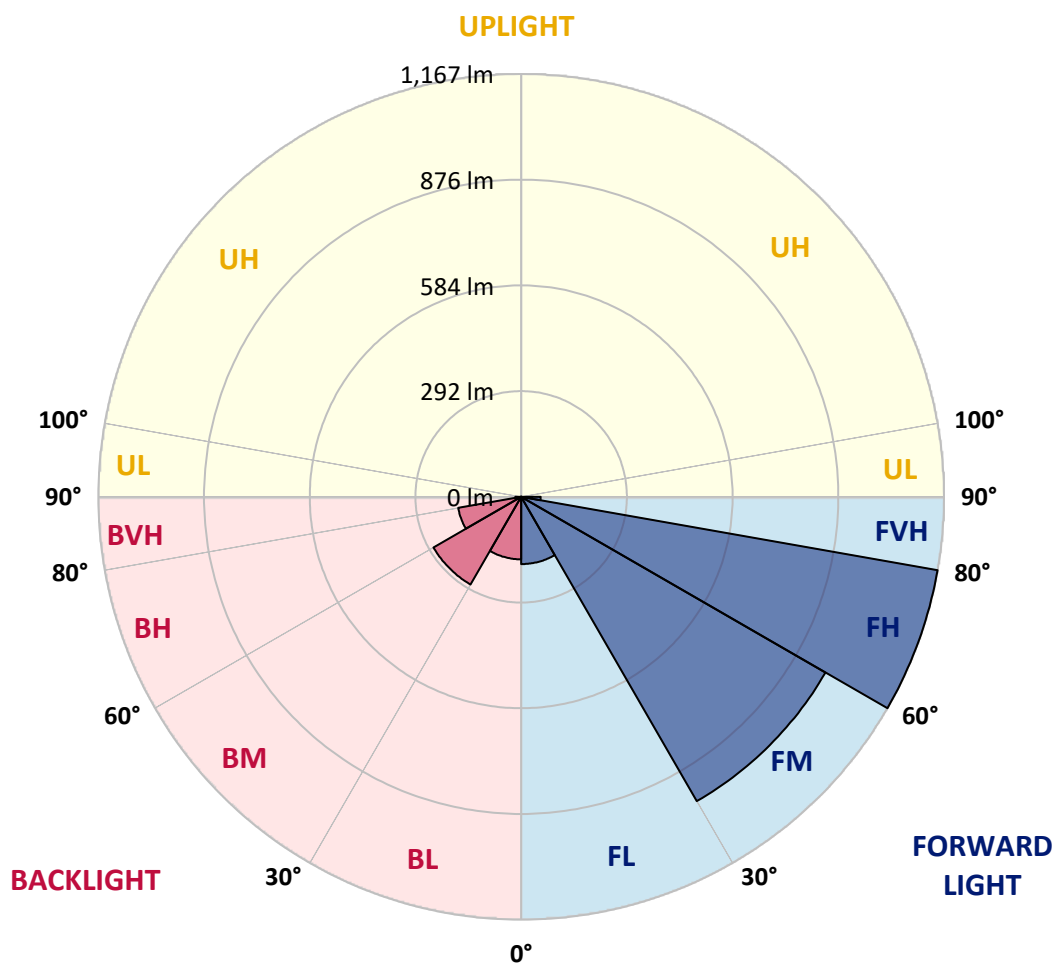



REPORT NUMBER: P156850

CATALOG NUMBER: AVS-E01-LED-E-U-T4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	47.5°
0°	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3
2.5°	391.0	392.3	391.3	391.7	391.7	392.0	392.0	392.3	392.0	393.0	393.7
5°	384.0	384.7	384.4	385.0	385.7	387.0	386.6	388.3	388.7	389.6	391.3
7.5°	381.3	380.6	381.0	382.0	382.7	383.3	384.0	385.3	386.3	388.7	389.9
10°	384.0	383.6	384.0	384.7	384.7	385.0	384.4	385.7	386.3	388.3	389.6
12.5°	395.0	395.0	394.3	394.3	393.7	393.0	391.3	390.4	389.9	390.4	391.0
15°	412.6	412.0	410.7	409.6	408.3	406.0	403.6	401.7	400.3	398.3	397.6
17.5°	430.1	429.0	427.7	426.3	424.7	422.4	418.7	416.4	412.6	410.4	409.0
20°	449.9	448.0	446.3	444.7	441.3	440.6	437.0	433.0	428.7	423.3	422.7
22.5°	476.0	472.6	470.7	469.6	466.3	465.3	459.4	453.7	448.3	441.3	439.7
25°	502.4	499.0	498.0	496.7	494.3	493.0	487.4	481.0	474.0	464.4	462.4
27.5°	528.0	528.3	525.7	526.6	526.0	523.6	518.0	511.7	506.3	495.0	492.6
30°	560.0	558.0	556.7	558.7	556.4	556.7	551.7	548.3	539.7	533.0	528.3
32.5°	593.4	593.0	595.0	596.4	596.0	595.3	591.3	588.0	580.3	570.7	568.7
35°	639.0	641.0	642.7	648.7	648.7	653.0	649.0	645.0	636.0	624.4	620.3
37.5°	670.1	670.7	677.3	685.3	695.3	704.7	707.4	708.3	704.7	696.0	689.9
40°	698.3	699.7	710.4	722.7	737.3	755.6	766.6	771.7	772.6	768.7	755.6
42.5°	726.6	728.7	739.7	757.6	778.0	801.3	820.6	833.0	840.0	840.0	832.3
45°	759.7	762.4	774.3	794.0	817.6	847.0	873.7	897.3	908.7	909.3	902.0
47.5°	798.7	801.0	815.0	835.0	859.4	889.0	922.7	949.6	970.7	972.0	966.0
50°	849.0	852.3	864.0	882.0	907.0	937.0	970.7	1008.3	1030.4	1035.6	1029.3
52.5°	915.6	916.4	926.0	942.7	967.0	995.6	1031.3	1072.3	1101.3	1105.7	1095.3
55°	1007.7	1006.6	1013.0	1031.0	1049.3	1071.7	1108.7	1154.7	1187.0	1193.7	1183.0
57.5°	1132.6	1131.7	1137.0	1141.3	1175.6	1197.3	1233.7	1277.6	1309.0	1328.3	1309.9
60°	1326.3	1325.3	1334.0	1359.4	1385.0	1416.7	1452.0	1504.7	1548.7	1554.3	1536.4
62.5°	1466.6	1471.7	1490.7	1520.3	1572.3	1634.3	1699.0	1768.3	1858.7	1887.4	1878.7
65°	1417.6	1427.7	1454.0	1499.0	1568.3	1654.0	1755.3	1881.0	2002.0	2069.6	2067.7
66°	1373.7	1384.7	1417.0	1460.3	1533.7	1627.4	1738.0	1875.0	2010.4	2085.0	2089.6
67.5°	1293.7	1306.0	1337.6	1389.0	1460.3	1560.0	1679.0	1828.0	1981.0	2068.0	2080.3
70°	1138.0	1152.0	1175.0	1217.3	1287.7	1376.7	1502.0	1635.3	1795.6	1895.3	1910.4
72.5°	951.3	963.6	989.3	1024.0	1081.7	1137.6	1236.0	1334.3	1449.0	1562.7	1551.7
75°	683.0	688.3	703.6	741.3	772.3	822.7	901.7	982.4	1060.6	1112.6	1120.0
77.5°	355.0	369.0	390.7	432.3	466.0	511.3	562.7	623.3	680.6	728.3	715.3
80°	232.3	238.3	257.6	279.0	303.6	332.6	367.0	389.6	397.0	394.0	397.0
82.5°	134.0	145.0	170.7	187.0	205.3	215.3	242.7	268.7	283.3	265.0	258.3
85°	17.0	22.0	69.3	87.4	100.0	115.0	123.3	139.0	129.6	116.0	141.3
87.5°	3.6	3.3	4.7	9.9	10.4	8.7	16.4	17.3	10.7	5.3	6.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P156850

CATALOG NUMBER: AVS-E01-LED-E-U-T4

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
0°	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3
2.5°	394.3	394.7	395.3	396.4	397.0	397.6	398.3	399.4	400.0	400.6	402.0
5°	392.6	394.0	395.3	396.7	398.3	401.0	402.7	404.0	405.3	408.0	409.0
7.5°	391.7	394.0	396.0	398.3	401.0	403.3	406.3	408.0	409.9	411.7	413.7
10°	391.0	394.3	396.4	399.7	402.7	405.0	408.3	410.4	412.6	414.7	415.6
12.5°	392.3	394.0	396.0	399.4	403.0	406.3	409.9	411.7	413.7	415.3	415.6
15°	398.0	398.0	398.3	401.0	404.7	407.4	410.4	412.0	413.0	414.0	414.0
17.5°	408.3	406.0	404.4	404.7	407.0	408.7	410.4	410.4	409.6	409.3	408.7
20°	420.3	417.3	414.0	411.7	411.0	409.6	408.7	405.3	402.7	400.3	398.7
22.5°	437.6	433.0	428.3	424.0	420.0	415.0	409.3	402.7	396.4	392.0	389.3
25°	459.0	455.3	449.6	443.0	438.0	428.7	421.3	411.7	403.6	398.0	393.4
27.5°	489.3	485.0	479.7	473.7	466.3	456.0	447.0	435.6	426.0	417.6	411.7
30°	527.0	521.3	517.3	510.1	505.0	493.4	484.4	470.4	451.7	438.3	430.1
32.5°	565.7	559.4	556.0	550.4	544.7	537.6	524.0	502.4	478.3	456.7	442.4
35°	617.3	610.7	604.7	599.7	591.3	578.3	566.3	540.3	507.4	477.0	453.0
37.5°	682.4	671.3	656.4	643.6	629.0	610.4	592.0	565.3	527.7	488.3	456.4
40°	751.7	732.3	711.0	687.4	662.0	635.0	614.0	587.0	544.7	498.0	454.0
42.5°	824.0	793.4	763.6	730.4	695.0	663.0	635.6	606.0	557.3	500.6	444.7
45°	895.6	861.3	816.4	772.6	728.0	688.3	657.6	624.4	569.0	501.7	432.3
47.5°	955.0	919.7	868.3	813.7	760.6	715.6	679.7	643.6	584.7	508.7	429.3
50°	1017.6	974.7	917.6	853.0	793.0	742.7	704.4	667.0	606.6	526.6	439.0
52.5°	1086.0	1036.7	969.9	897.6	832.0	775.6	734.0	695.6	634.7	552.0	457.3
55°	1169.3	1109.0	1036.7	955.0	884.7	822.4	776.4	731.0	668.0	582.0	480.3
57.5°	1296.7	1222.7	1141.3	1048.3	970.4	896.7	841.7	789.3	719.7	626.6	511.7
60°	1527.0	1448.0	1342.4	1229.6	1138.0	1052.0	971.3	906.3	820.6	714.7	581.0
62.5°	1857.0	1752.0	1611.0	1453.4	1333.4	1209.3	1118.3	1021.7	915.3	801.0	662.7
65°	2040.3	1913.0	1724.4	1541.3	1387.0	1252.3	1136.7	1024.7	906.6	797.3	681.7
66°	2063.0	1930.4	1734.3	1541.7	1379.7	1241.3	1119.7	1003.6	883.0	778.7	673.7
67.5°	2053.7	1918.0	1716.0	1512.6	1348.0	1199.4	1073.7	953.4	833.0	735.6	647.0
70°	1900.6	1772.0	1573.7	1376.7	1220.3	1073.7	953.7	835.3	725.0	641.7	576.4
72.5°	1578.3	1468.3	1296.0	1141.3	1018.7	897.6	796.0	683.0	589.6	528.0	489.3
75°	1139.4	1072.6	915.6	827.0	719.4	639.0	540.3	473.4	406.3	376.4	369.6
77.5°	719.7	629.9	530.4	436.7	359.0	297.6	231.7	196.7	164.0	160.6	194.0
80°	364.4	328.0	252.6	201.3	169.3	137.0	108.3	82.0	57.3	69.0	82.7
82.5°	238.7	199.0	156.0	128.3	111.7	92.6	72.0	49.9	36.7	41.3	56.7
85°	129.0	110.1	88.7	70.1	56.7	50.7	34.0	24.0	23.6	25.3	32.3
87.5°	9.3	9.3	7.4	6.6	8.0	6.6	6.0	6.0	5.7	6.0	8.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P156850

CATALOG NUMBER: AVS-E01-LED-E-U-T4

CANDELA DISTRIBUTION (continued):

	105°	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
0°	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3
2.5°	402.7	403.6	404.0	405.7	406.6	407.4	408.0	408.0	408.3	409.3	409.6
5°	410.4	412.0	414.0	415.3	416.0	418.0	418.7	418.7	419.4	420.6	421.7
7.5°	415.0	417.3	419.4	420.0	421.3	422.0	423.0	423.6	423.6	425.0	425.7
10°	416.7	418.0	420.0	420.0	421.3	421.3	422.4	422.7	422.7	424.0	425.0
12.5°	416.7	417.3	419.0	419.0	420.0	420.3	421.7	422.7	423.0	424.7	426.0
15°	414.7	415.3	416.7	417.0	419.4	420.6	423.6	425.7	425.7	427.4	428.0
17.5°	409.0	410.7	413.4	416.0	420.3	423.3	427.0	428.7	427.4	426.3	425.3
20°	399.7	402.7	409.0	415.6	423.3	427.4	429.3	427.7	423.0	418.3	415.3
22.5°	390.4	396.4	407.0	417.0	425.7	428.3	427.4	421.3	413.7	408.0	404.0
25°	394.7	401.7	412.0	421.0	426.6	426.0	422.0	413.7	405.3	398.0	391.3
27.5°	412.6	420.3	426.0	429.0	428.3	423.6	417.3	408.0	398.0	388.3	379.0
30°	429.6	433.7	435.0	432.6	427.4	419.7	411.7	401.0	387.7	375.6	365.0
32.5°	437.3	433.4	427.0	420.6	412.0	405.3	394.3	382.7	366.0	351.7	341.0
35°	437.3	421.3	405.3	392.0	379.0	370.7	358.0	342.4	327.0	315.0	306.6
37.5°	427.7	397.0	370.7	349.0	332.6	323.6	304.7	290.7	277.6	273.7	268.3
40°	409.9	364.7	326.6	298.3	277.6	264.4	245.3	235.6	230.7	228.7	227.7
42.5°	386.3	328.7	278.0	243.0	220.6	205.7	193.0	187.0	186.6	186.3	186.3
45°	361.0	289.9	230.7	189.0	169.3	156.0	150.1	147.7	149.6	149.3	149.6
47.5°	345.3	260.6	187.4	143.0	128.0	119.4	116.4	117.3	119.0	118.3	118.3
50°	343.3	245.7	158.3	111.3	100.0	95.6	95.0	95.0	96.0	95.3	95.0
52.5°	350.7	243.3	143.3	95.6	86.6	83.0	82.4	82.0	81.7	79.7	78.0
55°	363.3	248.7	139.0	91.7	82.4	78.3	77.3	76.7	75.3	72.6	69.6
57.5°	388.7	265.3	143.0	93.7	83.6	80.3	79.4	79.4	76.7	72.3	68.0
60°	449.6	307.7	159.4	101.3	89.9	86.6	87.4	87.0	83.0	76.7	70.1
62.5°	528.3	363.0	180.6	112.0	98.0	97.3	100.6	100.0	93.4	83.6	74.0
65°	564.7	389.0	186.6	114.3	99.7	102.7	109.3	108.7	100.3	87.0	74.7
66°	565.3	389.0	184.0	112.3	97.3	101.0	107.7	107.4	99.0	85.7	73.4
67.5°	551.7	378.3	176.4	108.3	92.6	95.3	101.3	101.0	93.4	82.4	70.7
70°	500.3	338.7	156.7	101.3	86.3	85.0	87.0	85.7	80.6	73.0	65.0
72.5°	428.7	284.4	136.7	96.0	82.0	76.7	75.3	74.3	70.4	66.0	61.0
75°	337.6	225.0	120.0	92.0	78.0	71.0	68.7	67.4	64.7	61.7	57.6
77.5°	208.3	161.0	104.7	86.6	75.0	68.0	66.3	64.4	60.3	56.7	53.7
80°	93.0	99.7	86.0	75.6	67.0	60.6	58.0	55.0	51.0	48.7	47.0
82.5°	62.0	64.4	62.4	56.7	50.7	45.7	41.7	41.7	41.0	39.0	38.3
85°	39.7	40.0	38.7	35.0	32.6	29.6	28.0	28.3	29.6	29.3	29.0
87.5°	9.0	9.0	10.7	9.9	11.7	12.3	13.4	14.3	16.4	16.4	17.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P156850

CATALOG NUMBER: AVS-E01-LED-E-U-T4

CANDELA DISTRIBUTION (continued):

	160°	165°	170°	175°	180°
0°	398.3	398.3	398.3	398.3	398.3
2.5°	409.9	410.7	411.3	410.4	410.7
5°	421.7	421.3	423.0	422.0	422.7
7.5°	425.3	425.7	427.0	427.0	427.4
10°	425.7	426.3	428.0	429.0	429.6
12.5°	427.4	428.7	431.3	432.0	432.0
15°	428.7	429.3	431.0	431.7	432.3
17.5°	424.0	422.7	423.3	423.6	423.3
20°	412.3	411.0	410.7	409.3	409.9
22.5°	399.7	396.0	393.7	391.0	391.0
25°	384.4	378.7	374.0	369.3	370.4
27.5°	369.9	362.7	358.0	355.0	354.3
30°	356.0	348.3	344.0	340.3	340.3
32.5°	332.6	327.4	321.7	319.4	319.0
35°	300.3	297.0	292.3	291.3	289.6
37.5°	264.0	263.0	259.0	258.7	257.0
40°	226.0	226.6	225.3	224.7	223.6
42.5°	188.0	191.3	190.7	190.4	189.6
45°	151.7	154.0	154.3	155.3	157.0
47.5°	119.4	120.0	120.6	120.3	120.6
50°	93.4	91.7	91.3	90.4	91.3
52.5°	75.3	72.6	71.3	70.1	69.3
55°	66.3	63.6	62.4	61.7	61.0
57.5°	64.0	61.3	59.4	58.0	57.6
60°	64.7	60.6	58.0	56.4	56.0
62.5°	66.3	61.0	57.3	55.6	55.3
65°	66.0	60.3	57.0	55.0	54.7
66°	65.0	59.7	56.4	54.7	54.3
67.5°	63.3	58.7	55.6	54.3	53.7
70°	60.3	57.3	55.0	53.4	52.6
72.5°	57.6	55.3	53.4	51.7	51.3
75°	54.7	52.6	50.7	49.3	49.0
77.5°	51.0	49.0	47.7	46.6	46.3
80°	45.0	43.6	42.4	41.0	41.0
82.5°	37.3	36.4	35.0	34.0	33.7
85°	28.7	28.7	27.7	26.6	26.3
87.5°	17.0	16.7	16.7	15.6	15.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)