

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P152589

Luminaire Tested: **AVS-E01-LED-E-U-SL4-7030**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P152589
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33680)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-E01-LED-E-U-SL4-7030
Description: VISION SITE SMALL LED LUMINAIRE
(1) LIGHTBARS WITH AccuLED OPTICS - TYPE 4 W/ SPILL LIGHT CONTROL
Light Source: (21) 3000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2698.1 lumens
Efficiency: N/A
Efficacy: 109.2 lumens/watt
Luminous Opening: Rectangular (W 0.17' x L: 1' x H: 0')
IES Classification: Type IV - Short - Full Cutoff
BUG Rating: B1 - U0 - G1

Input Watts (W): 24.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P152589

CATALOG NUMBER: AVS-E01-LED-E-U-SL4-7030

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 - - - 1/2 Max cd

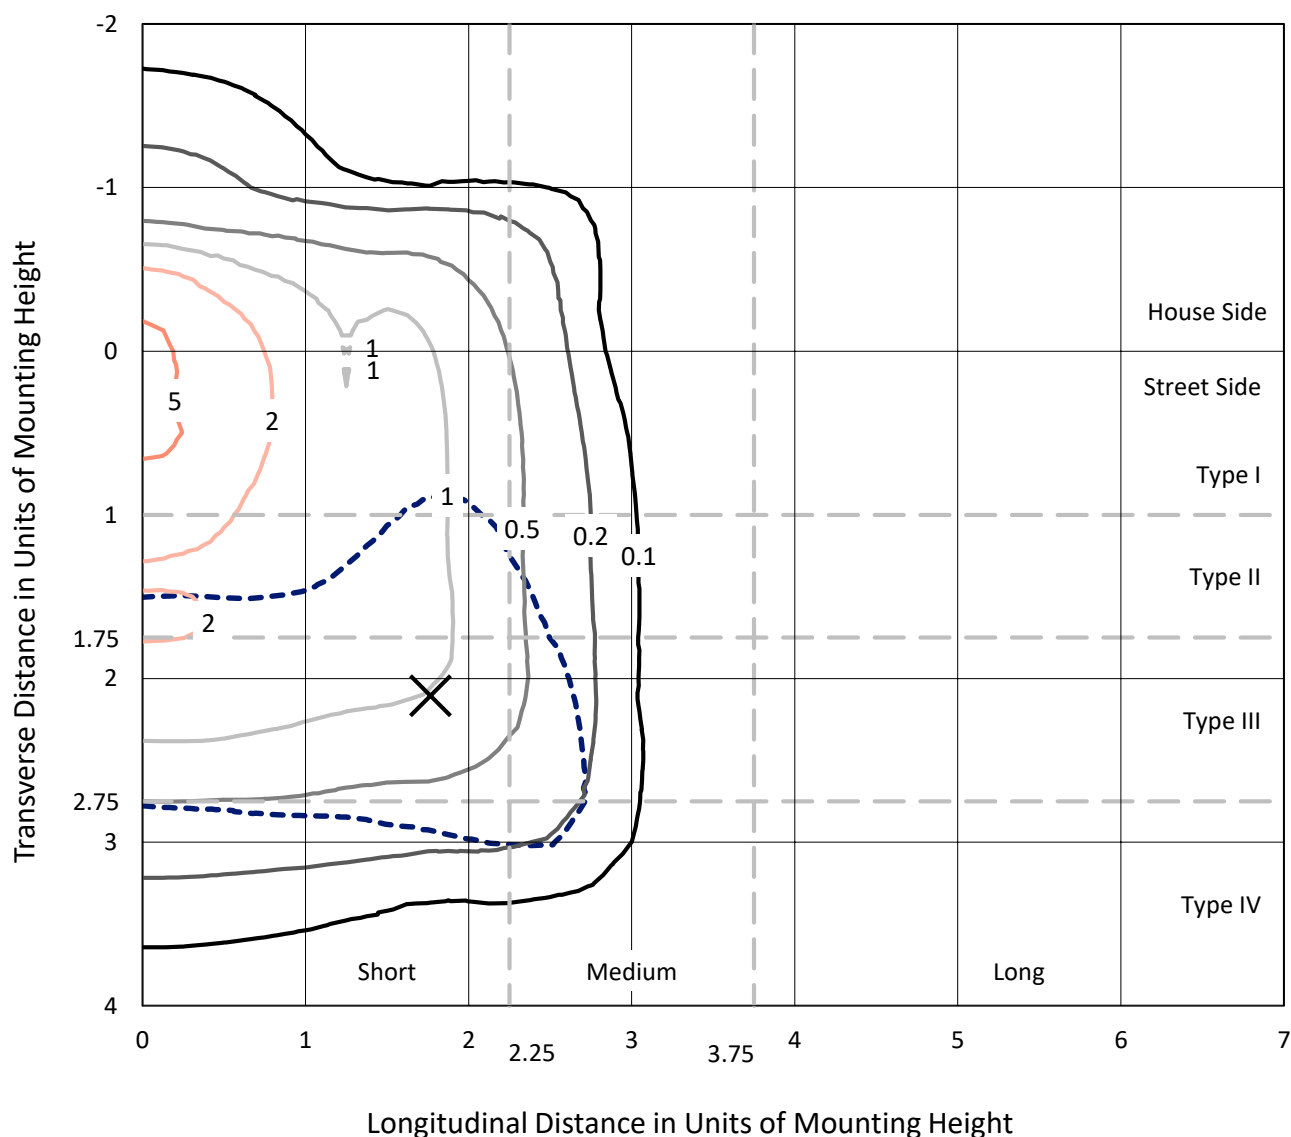


Based on 10 foot mounting height. Maximum calculated value = 5.8 fc
 Type IV - Short - Full Cutoff

REPORT NUMBER: P152589

CATALOG NUMBER: AVS-E01-LED-E-U-SL4-7030

Luminous Intensity Polar Plot

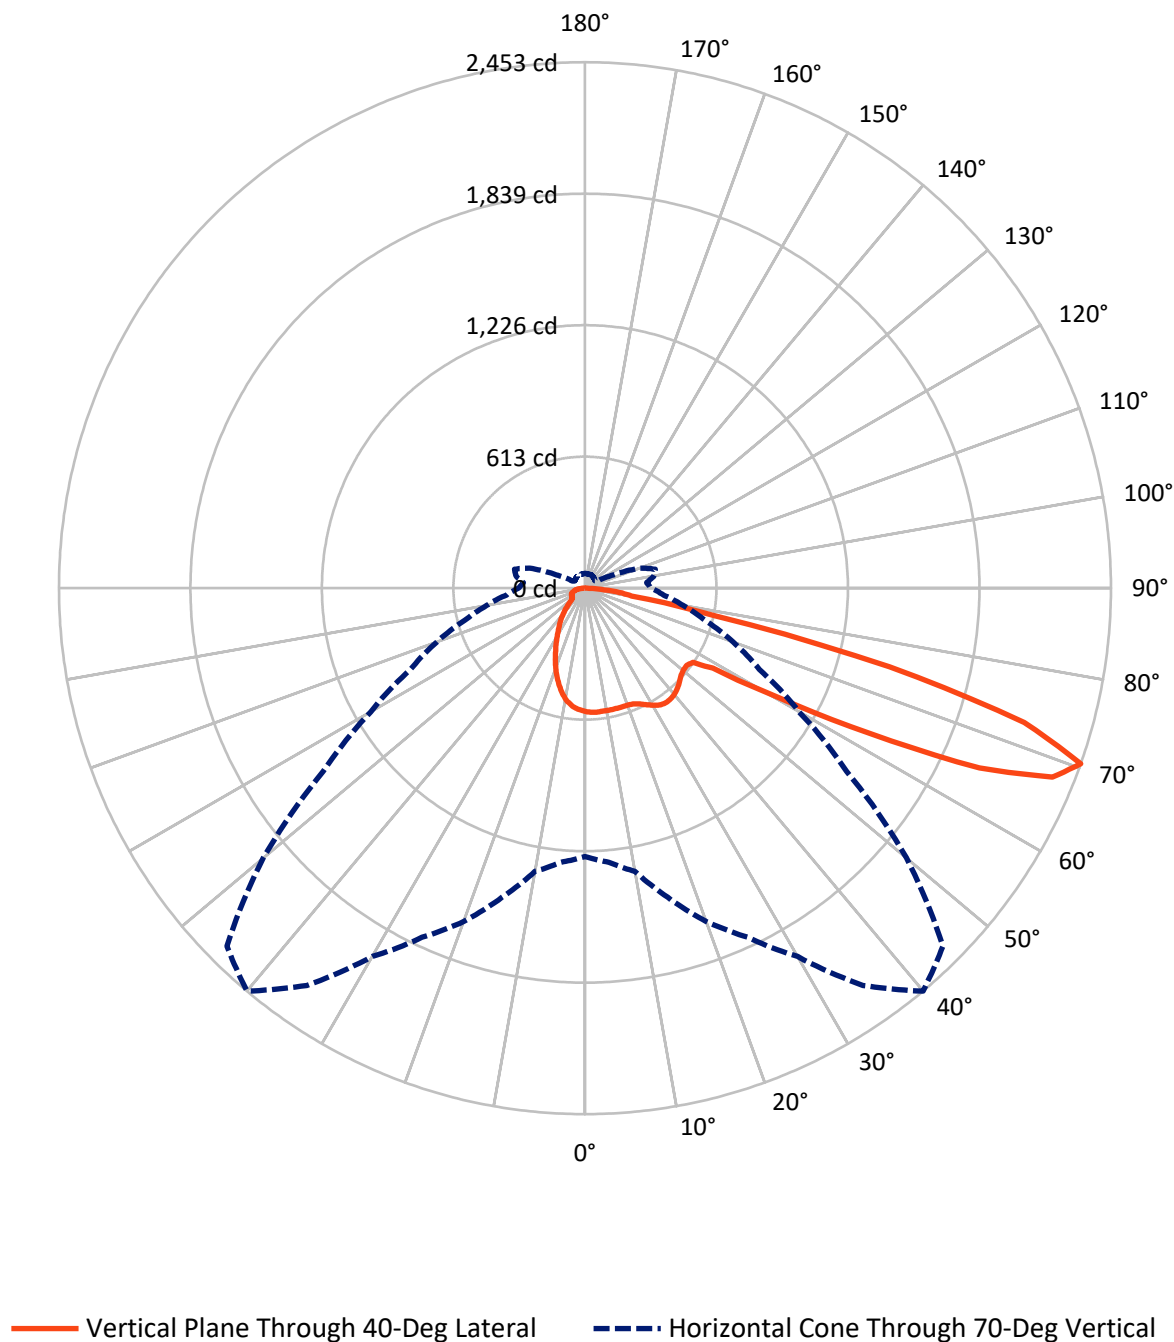

REPORT NUMBER: P152589

CATALOG NUMBER: AVS-E01-LED-E-U-SL4-7030


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	560.1	0.0	560.1
	% Fixture	20.8	0.0	20.8
Street Side	Lumens	2138.0	0.0	2138.0
	% Fixture	79.2	0.0	79.2
Total	Lumens	2698.1	0.0	2698.1
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.8	2.0
10°-20°	147.2	5.5
20°-30°	218.0	8.1
30°-40°	275.4	10.2
40°-50°	311.5	11.5
50°-60°	443.3	16.4
60°-70°	825.6	30.6
70°-80°	378.4	14.0
80°-90°	44.9	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2698.1	100.0
0°-180°	2698.1	100.0

Coefficient of Utilization

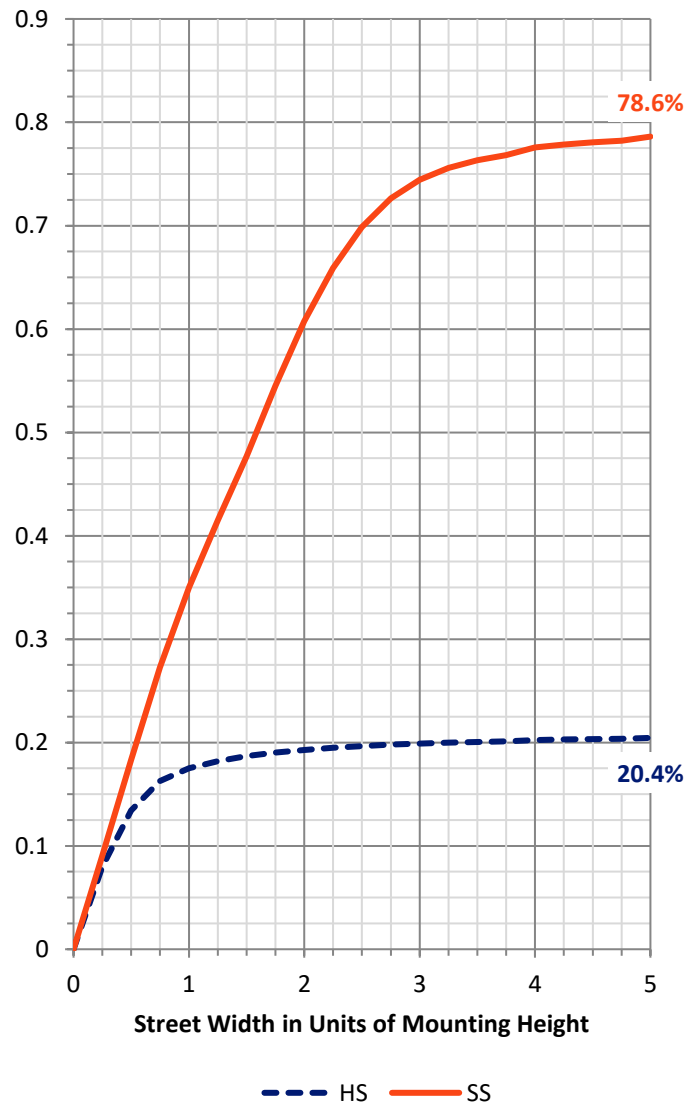

REPORT NUMBER: P152589


CATALOG NUMBER: AVS-E01-LED-E-U-SL4-7030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	245.7	9.1			
FM	(30°-60°)	790.5	29.3			
FH	(60°-80°)	1068.6	39.6			G1/1800
FVH	(80°-90°)	33.3	1.2			G1/100
BL	(0°-30°)	173.3	6.4	B1/500		
BM	(30°-60°)	239.8	8.9	B1/1000		
BH	(60°-80°)	135.4	5.0	B1/500		G1/500
BVH	(80°-90°)	11.6	0.4			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G1

Type IV Short

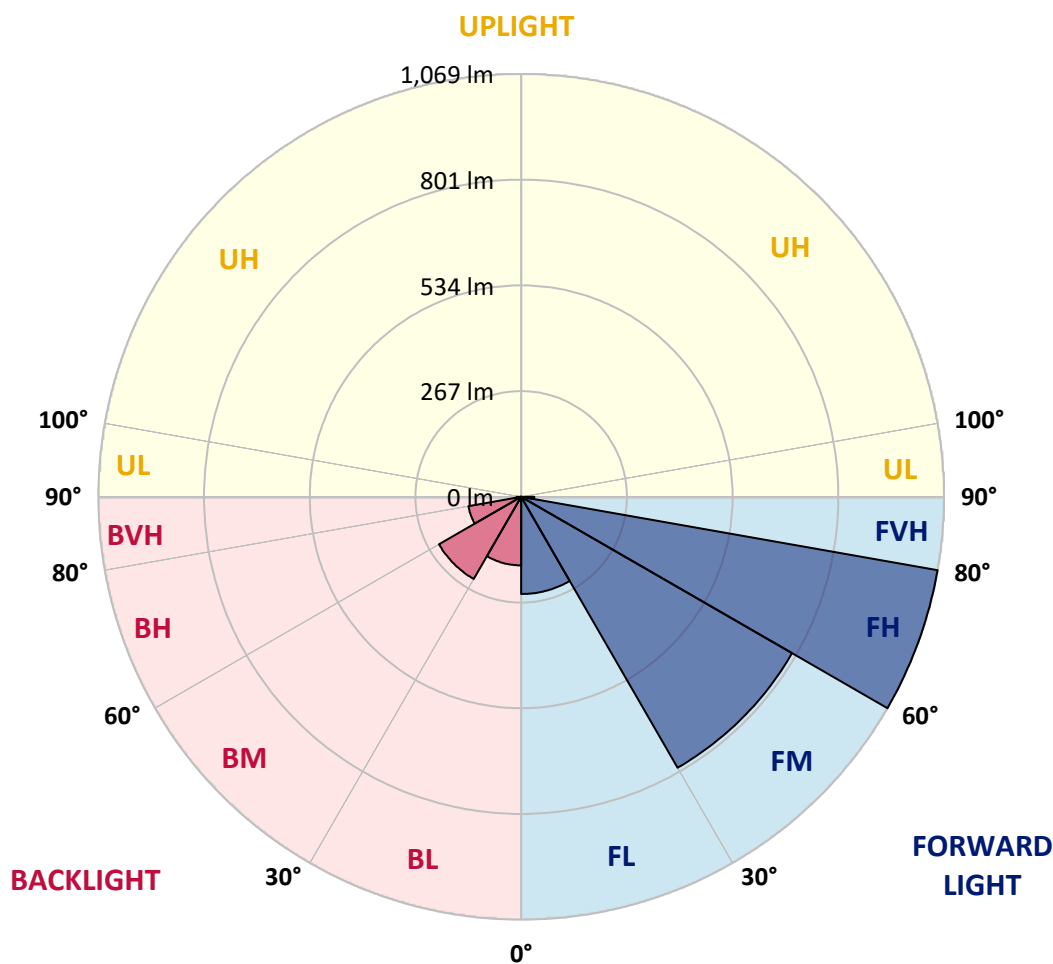



REPORT NUMBER: P152589

CATALOG NUMBER: AVS-E01-LED-E-U-SL4-7030

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8
2.5°	584.6	586.1	584.2	583.9	583.9	583.6	581.8	581.5	579.1	579.4	580.0
5°	588.8	589.4	588.2	587.9	587.3	586.1	584.6	582.7	580.9	579.1	577.5
7.5°	593.1	592.4	591.5	591.5	590.7	588.8	585.8	583.3	579.4	577.2	574.5
10°	599.2	598.2	597.0	596.4	594.9	592.1	587.9	584.6	579.7	575.4	570.9
12.5°	605.0	604.7	602.8	601.9	599.5	596.7	591.5	586.3	580.0	573.3	567.2
15°	615.3	614.1	612.2	610.5	606.4	602.8	594.9	588.8	579.7	570.9	561.5
17.5°	633.3	631.1	629.3	625.4	620.5	614.1	602.5	592.1	579.7	566.8	556.3
20°	666.1	661.6	659.2	654.0	645.4	633.9	615.9	599.2	580.6	564.1	549.8
22.5°	703.3	700.2	696.9	693.6	680.1	663.4	639.1	614.1	586.1	562.9	544.7
25°	745.0	741.0	739.2	733.5	720.9	701.8	668.6	633.9	598.5	567.8	544.7
27.5°	782.2	780.9	780.6	773.9	762.1	739.5	700.2	658.5	615.6	577.8	549.2
30°	816.0	814.7	814.1	810.5	796.8	769.9	727.4	680.4	634.2	591.8	557.7
32.5°	851.8	847.9	846.1	839.1	823.5	792.2	743.4	694.7	648.8	605.6	567.2
35°	881.0	877.7	874.1	864.0	842.1	805.0	750.5	699.6	654.6	613.2	572.0
37.5°	902.4	899.1	893.9	881.0	854.0	809.2	750.2	698.1	652.4	611.9	573.0
40°	911.8	908.5	903.0	886.8	856.1	806.8	744.4	691.1	646.0	605.6	569.3
42.5°	908.2	905.7	898.8	883.2	849.4	795.9	732.8	678.0	633.9	595.2	561.1
45°	894.2	892.3	885.6	869.2	834.2	778.1	715.8	661.6	619.3	582.4	550.2
47.5°	873.2	872.5	865.9	849.7	815.0	760.5	698.1	645.4	604.7	569.9	541.0
50°	850.1	846.9	843.6	828.7	797.1	745.3	685.3	635.3	596.4	565.4	537.1
52.5°	835.4	834.5	831.5	818.0	787.6	736.5	679.5	631.7	595.9	564.5	534.9
55°	965.1	967.3	939.3	881.0	829.9	760.8	696.9	650.3	610.8	579.1	557.4
57.5°	1427.6	1418.1	1370.1	1254.6	1124.4	952.3	828.4	753.2	704.1	709.6	720.6
60°	1663.2	1661.3	1652.5	1607.8	1521.0	1390.2	1244.9	1078.3	1025.4	1031.2	1035.4
62.5°	1768.6	1771.3	1778.0	1761.2	1738.4	1700.3	1627.9	1560.9	1489.9	1463.5	1392.5
65°	1817.3	1822.2	1837.3	1846.8	1855.6	1862.3	1891.0	1969.5	2021.2	1924.5	1699.2
67.5°	1716.5	1739.9	1790.2	1839.2	1883.0	1945.4	2042.3	2224.7	2351.6	2232.5	1905.9
70°	1251.3	1283.2	1340.8	1492.4	1654.4	1796.0	1983.5	2261.1	2452.6	2360.7	1957.0
72.5°	784.6	793.4	819.0	874.7	994.9	1176.7	1504.6	1921.0	2142.1	2068.7	1654.1
75°	497.8	500.8	499.9	512.6	533.1	572.6	702.4	1134.7	1467.5	1353.0	921.9
77.5°	296.6	301.1	302.9	306.8	316.6	330.7	341.2	386.0	615.3	597.3	334.6
80°	248.4	252.1	249.0	248.1	242.1	237.8	242.9	237.8	220.7	212.5	195.8
82.5°	131.5	131.2	130.3	139.2	157.1	171.1	181.8	179.3	162.3	138.2	117.2
85°	72.1	74.6	74.6	77.6	74.9	75.2	77.6	81.9	75.9	63.3	51.7
87.5°	6.1	9.4	7.6	9.4	12.7	9.1	8.8	8.8	7.6	5.5	4.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152589

CATALOG NUMBER: AVS-E01-LED-E-U-SL4-7030

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8
2.5°	578.4	577.8	576.6	575.8	575.8	574.2	573.3	572.6	572.3	571.2	571.2
5°	576.6	574.5	572.3	570.9	569.9	568.4	566.0	564.8	563.2	562.0	561.5
7.5°	572.6	568.7	565.4	562.9	559.9	557.4	554.4	551.7	548.9	547.7	547.0
10°	566.6	561.5	556.3	551.7	547.4	543.1	539.2	535.2	531.9	529.4	527.0
12.5°	560.8	552.8	546.2	539.5	532.7	527.6	522.2	516.4	511.5	506.9	505.7
15°	552.8	543.7	535.2	527.0	518.8	510.3	503.5	497.2	489.2	484.0	480.1
17.5°	545.6	534.6	524.2	514.5	504.5	495.6	485.6	477.1	469.1	461.2	455.4
20°	537.6	525.8	514.8	503.8	493.0	481.7	470.1	459.1	449.3	439.9	430.5
22.5°	530.7	518.4	507.8	496.0	483.7	471.0	457.6	443.9	432.6	420.4	409.5
25°	526.4	513.0	502.1	490.5	477.1	463.1	447.9	431.7	418.0	404.0	390.9
27.5°	526.4	509.0	497.8	486.2	472.5	457.6	440.8	423.2	407.7	392.1	376.0
30°	531.0	509.6	494.4	482.3	468.3	452.1	433.6	414.9	397.9	379.7	364.1
32.5°	535.2	510.9	492.0	476.5	460.3	444.5	425.6	405.8	386.9	369.6	353.2
35°	537.9	510.9	487.5	467.7	449.3	433.9	415.2	395.4	376.3	359.3	344.0
37.5°	538.2	508.4	480.1	457.6	438.4	422.3	404.7	386.0	367.8	351.9	339.2
40°	535.2	503.5	472.8	446.9	426.8	410.4	394.3	377.5	361.0	348.0	337.0
42.5°	529.7	498.3	465.8	438.4	417.4	400.3	385.4	371.1	356.8	345.6	336.4
45°	521.6	491.4	459.4	433.3	412.5	394.6	380.0	368.1	355.9	346.4	337.3
47.5°	514.2	488.9	461.6	436.6	414.9	396.4	381.5	371.4	362.0	355.6	343.1
50°	512.6	487.8	462.5	439.3	417.4	398.5	385.4	380.2	377.5	373.6	354.4
52.5°	508.4	487.5	469.1	456.4	442.4	433.6	419.8	424.7	421.7	407.7	373.0
55°	553.2	559.3	576.4	600.7	623.2	628.4	626.8	621.0	590.4	507.8	417.7
57.5°	760.5	794.9	827.2	841.5	839.7	823.5	811.9	788.5	744.0	643.6	506.0
60°	1048.5	1054.0	1037.0	1011.7	969.0	933.5	895.3	851.5	787.0	688.7	560.2
62.5°	1313.7	1240.0	1164.2	1093.0	1028.1	971.5	918.5	857.3	773.3	670.7	553.2
65°	1500.9	1345.1	1225.4	1123.1	1031.5	952.3	886.2	806.8	712.1	619.6	512.6
67.5°	1597.4	1358.4	1174.9	1032.4	902.4	792.7	704.8	627.5	557.1	516.7	448.8
70°	1489.6	1153.0	897.2	736.2	580.6	465.5	367.8	308.7	288.3	326.6	339.8
72.5°	1110.1	750.5	533.7	412.8	316.4	252.1	193.4	151.9	123.6	129.7	168.4
75°	524.9	323.9	228.9	174.2	138.5	114.8	93.8	85.9	71.8	59.7	56.1
77.5°	204.2	148.9	123.0	90.2	63.9	51.5	43.8	42.3	43.2	42.0	41.5
80°	155.5	105.4	66.1	48.4	41.7	36.8	32.5	31.4	31.9	33.5	35.0
82.5°	86.7	54.2	40.2	35.0	31.4	26.8	24.4	22.5	22.8	24.7	28.0
85°	33.5	26.2	24.0	23.1	21.7	17.3	14.9	15.2	17.3	20.7	20.7
87.5°	3.6	3.6	4.9	3.6	3.6	3.6	3.3	3.9	4.2	5.5	6.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152589

CATALOG NUMBER: AVS-E01-LED-E-U-SL4-7030

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8	575.8
2.5°	570.6	570.6	570.6	569.9	570.3	569.0	569.0	568.1	569.6	568.7	568.4
5°	561.8	561.5	560.2	560.2	560.2	560.2	561.1	558.7	560.5	560.5	559.6
7.5°	546.8	546.8	543.4	545.3	544.7	545.6	546.8	545.6	547.4	548.6	547.7
10°	526.1	526.1	523.3	525.5	524.6	526.7	528.8	527.6	528.8	530.7	531.3
12.5°	503.2	502.1	499.6	500.5	500.5	501.8	502.7	504.1	505.7	508.1	509.3
15°	476.8	474.9	471.9	471.9	470.1	470.7	472.5	473.2	476.2	479.5	483.4
17.5°	449.6	445.1	441.8	437.8	434.7	437.2	439.3	440.8	443.3	448.5	451.2
20°	424.1	414.9	408.6	403.4	400.0	401.6	404.4	406.1	408.3	409.5	410.4
22.5°	398.9	388.5	379.7	373.3	367.8	369.3	368.1	367.2	368.7	364.8	364.5
25°	376.9	364.8	352.8	345.3	338.5	336.4	330.1	328.5	324.2	320.9	318.4
27.5°	361.0	345.3	332.1	323.3	312.6	304.8	296.6	288.3	283.7	278.2	275.5
30°	348.6	331.8	316.4	301.5	287.4	275.2	264.2	253.6	246.3	238.3	233.2
32.5°	337.0	321.5	302.6	282.2	263.3	249.6	235.3	223.2	211.6	201.2	193.7
35°	329.1	311.7	287.7	262.7	241.5	225.3	210.1	192.7	178.8	165.3	157.1
37.5°	324.9	303.5	274.0	246.3	222.6	204.2	185.4	165.3	148.3	135.8	123.3
40°	321.5	295.3	261.9	231.7	206.7	184.8	162.9	139.2	120.2	107.2	97.4
42.5°	317.8	286.2	251.2	220.1	192.4	166.8	140.3	115.1	97.1	88.0	83.7
45°	313.9	278.2	241.1	209.1	178.4	147.4	116.9	93.5	82.8	79.8	79.8
47.5°	313.0	273.1	233.8	198.5	162.6	124.9	95.3	80.7	77.6	78.2	79.5
50°	316.6	271.6	227.5	186.0	141.6	101.0	80.7	75.9	76.4	78.2	80.1
52.5°	325.5	272.7	220.7	168.7	116.6	83.4	74.6	74.3	76.1	78.9	80.7
55°	340.4	272.7	208.0	142.8	93.2	74.9	72.4	73.7	76.1	78.5	80.1
57.5°	372.3	270.1	185.4	114.2	77.9	71.8	71.8	73.4	75.5	77.9	79.2
60°	410.4	266.4	153.8	88.3	70.4	69.4	71.5	73.4	75.2	77.3	78.5
62.5°	412.8	257.0	121.8	73.1	66.3	67.9	71.2	73.7	74.3	75.9	77.3
65°	379.4	224.0	96.8	65.5	64.6	66.9	70.4	72.1	72.4	73.1	74.6
67.5°	332.1	182.7	78.2	61.8	62.7	65.5	67.3	68.8	69.7	71.2	71.5
70°	272.7	146.7	66.9	58.1	59.1	62.1	63.6	65.2	66.9	68.8	67.9
72.5°	193.4	114.2	58.8	54.2	55.4	58.1	60.0	61.2	62.7	64.6	63.3
75°	82.2	79.8	50.9	49.0	50.9	52.6	54.5	56.4	57.8	58.8	58.8
77.5°	42.0	46.8	43.8	43.8	45.1	46.8	48.4	50.3	51.2	52.0	53.3
80°	35.6	36.3	36.8	38.0	39.3	41.1	42.6	44.1	44.5	44.8	45.4
82.5°	29.5	30.8	31.4	33.2	34.1	34.7	35.6	35.6	36.3	36.3	35.3
85°	21.3	22.8	23.7	24.0	23.7	24.0	24.4	25.0	26.5	26.5	25.3
87.5°	6.1	5.8	7.4	7.6	8.2	9.4	10.7	12.7	13.4	14.0	14.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P152589

CATALOG NUMBER: AVS-E01-LED-E-U-SL4-7030

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	575.8	575.8	575.8	575.8
2.5°	568.1	568.7	567.5	567.8
5°	559.6	560.8	559.3	561.1
7.5°	548.6	550.5	550.2	549.8
10°	532.7	535.2	535.2	536.2
12.5°	512.6	514.2	515.4	516.1
15°	485.6	488.3	489.8	489.8
17.5°	453.1	454.8	455.8	454.5
20°	411.6	411.0	411.3	408.3
22.5°	363.8	364.8	362.0	362.6
25°	316.9	315.4	316.6	314.8
27.5°	271.6	271.9	268.5	270.1
30°	228.3	226.8	222.6	224.7
32.5°	186.6	182.7	178.1	175.3
35°	147.4	141.2	139.2	138.2
37.5°	115.6	109.0	106.8	104.5
40°	91.9	89.5	88.6	89.2
42.5°	82.5	82.5	83.1	83.4
45°	80.1	80.9	81.9	82.2
47.5°	80.4	81.2	82.5	82.8
50°	80.9	81.9	82.8	83.1
52.5°	81.2	81.2	81.9	82.2
55°	80.7	80.4	80.7	80.9
57.5°	79.5	78.9	79.2	80.1
60°	78.9	77.9	78.5	79.2
62.5°	77.3	77.0	77.6	77.9
65°	74.0	74.3	75.2	75.2
67.5°	71.0	71.2	71.5	71.8
70°	67.3	67.6	68.2	68.5
72.5°	63.0	64.2	65.2	66.3
75°	59.7	60.9	62.7	63.9
77.5°	53.9	54.8	56.9	58.4
80°	45.7	45.4	45.7	46.6
82.5°	35.0	35.0	34.7	34.4
85°	24.7	24.4	23.4	23.4
87.5°	13.4	13.1	12.7	12.2
90°	0.0	0.0	0.0	0.0

(END OF REPORT)