

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P156849

Luminaire Tested: **AVS-E01-LED-E-U-T4-7030**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P156849
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33673)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-E01-LED-E-U-T4-7030
Description: VISION SITE SMALL LED LUMINAIRE
(1) LIGHTBARS WITH AccuLED OPTICS - TYPE 4 SHORT
Light Source: (21) 3000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2760.2 lumens
Efficiency: N/A
Efficacy: 111.7 lumens/watt
Luminous Opening: Rectangular (W 0.17' x L: 1' x H: 0')
IES Classification: Type IV - Short - Semi-Cutoff
BUG Rating: B1 - U0 - G1

Input Watts (W): 24.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P156849

CATALOG NUMBER: AVS-E01-LED-E-U-T4-7030

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 --- 1/2 Max cd

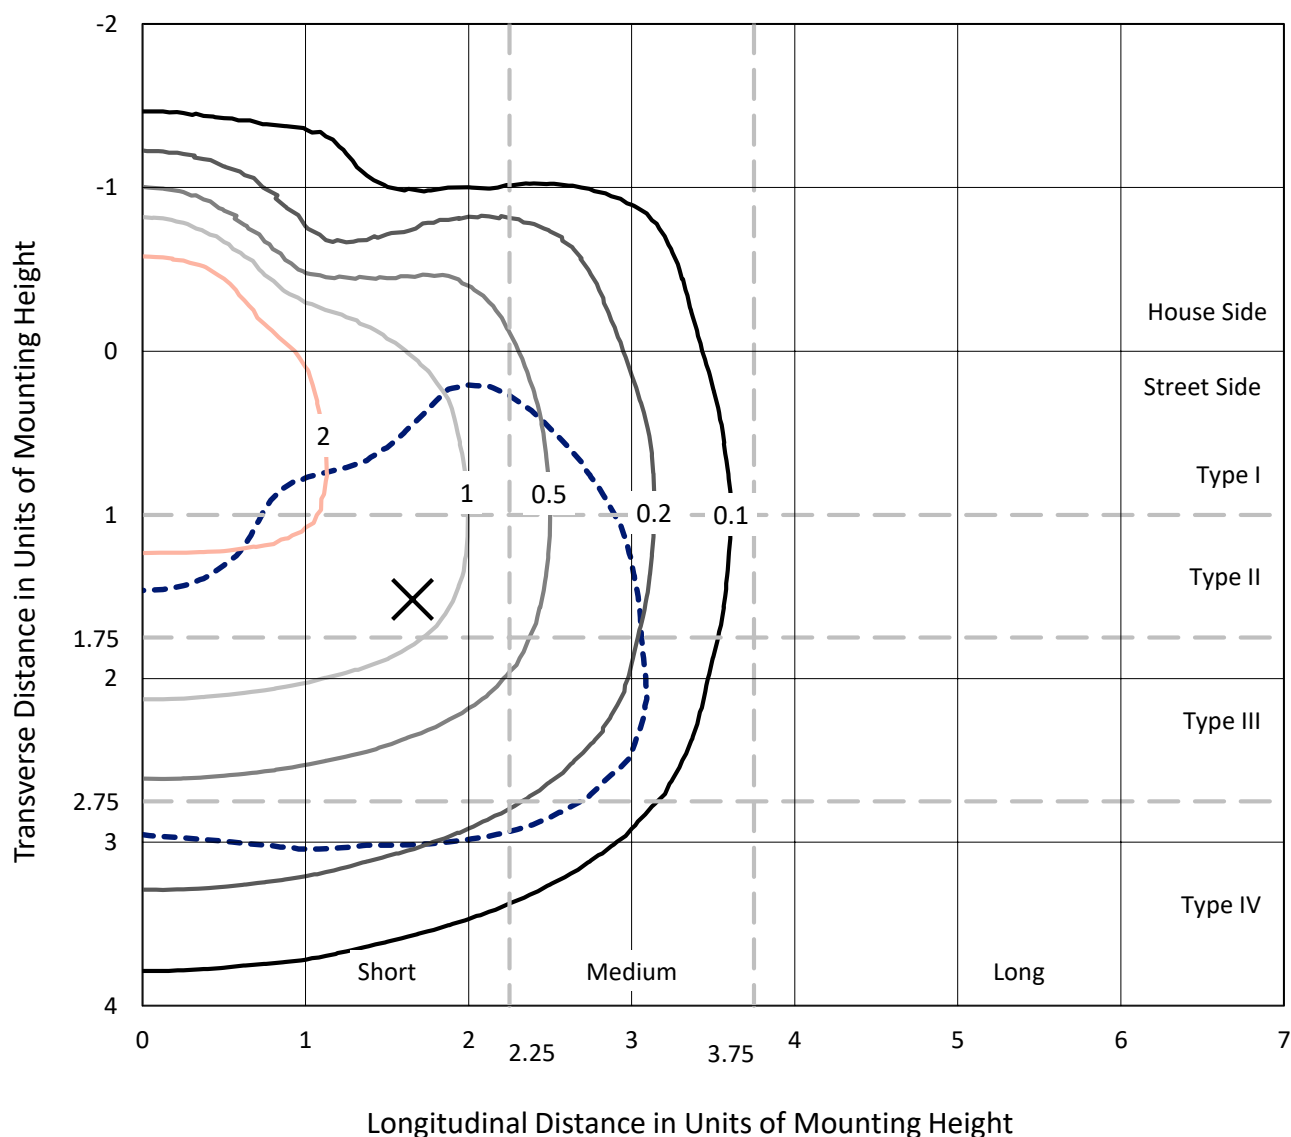


Based on 10 foot mounting height. Maximum calculated value = 3.8 fc
 Type IV - Short - Semi-Cutoff

REPORT NUMBER: P156849

CATALOG NUMBER: AVS-E01-LED-E-U-T4-7030

Luminous Intensity Polar Plot

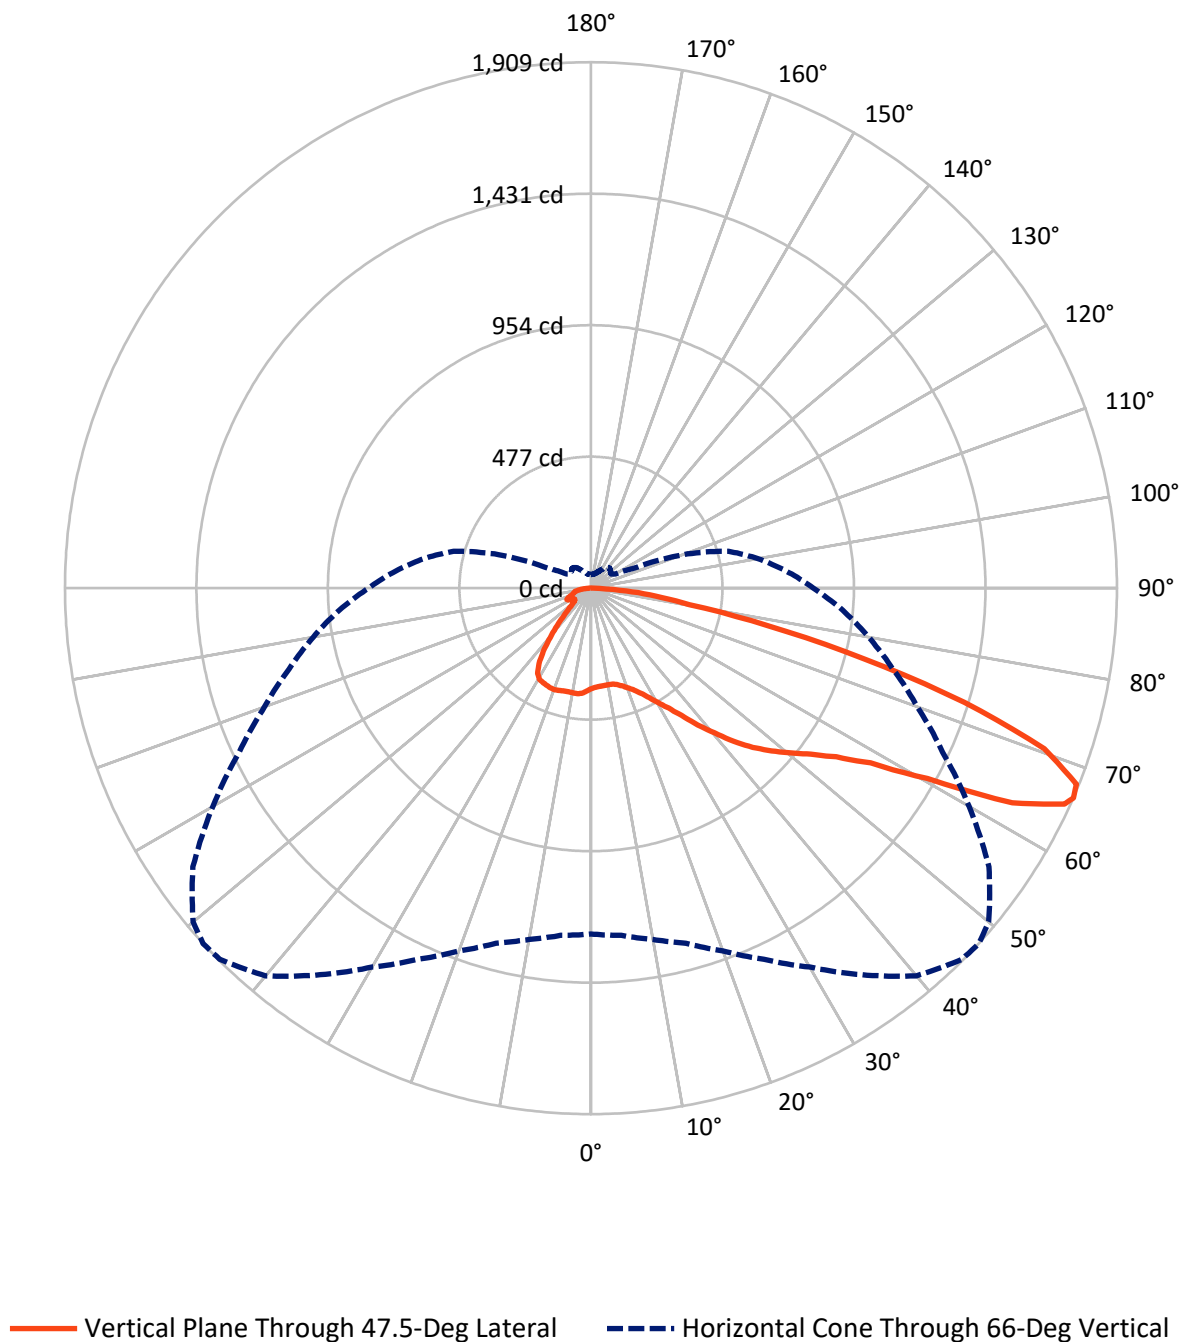

REPORT NUMBER: P156849

CATALOG NUMBER: AVS-E01-LED-E-U-T4-7030


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	589.0	0.0	589.0
	% Fixture	21.3	0.0	21.3
Street Side	Lumens	2171.2	0.0	2171.2
	% Fixture	78.7	0.0	78.7
Total	Lumens	2760.2	0.0	2760.2
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.3	1.3
10°-20°	107.3	3.9
20°-30°	184.8	6.7
30°-40°	279.5	10.1
40°-50°	362.3	13.1
50°-60°	499.5	18.1
60°-70°	776.1	28.1
70°-80°	451.3	16.3
80°-90°	64.2	2.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2760.2	100.0
0°-180°	2760.2	100.0

Coefficient of Utilization

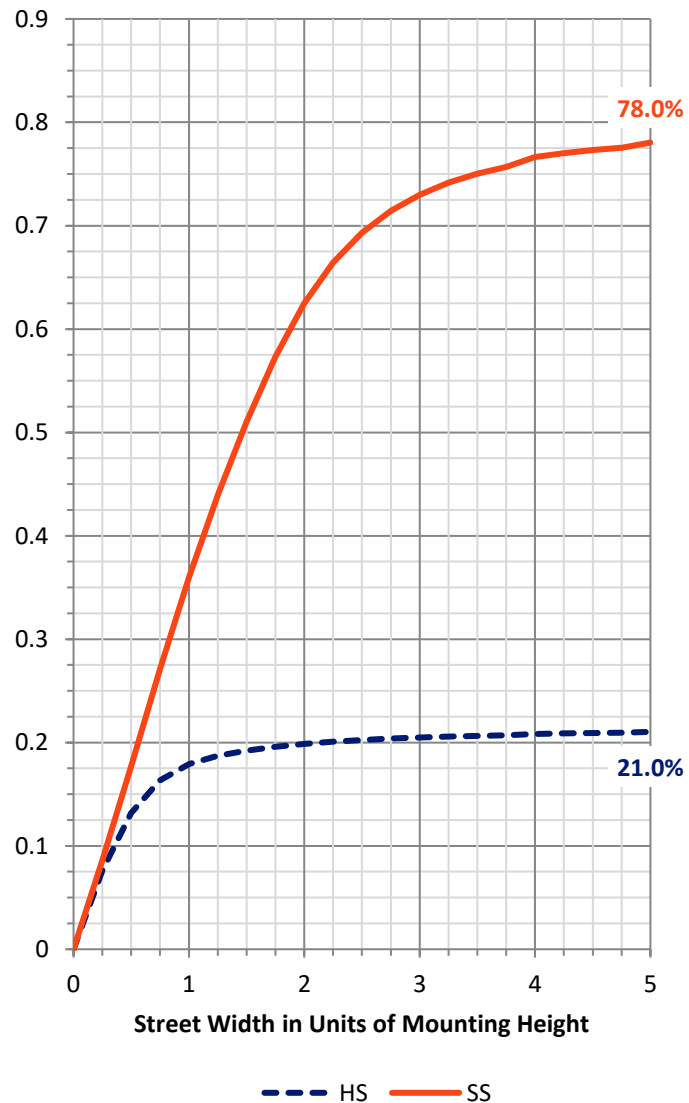

REPORT NUMBER: P156849


CATALOG NUMBER: AVS-E01-LED-E-U-T4-7030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	169.7	6.1			
FM	(30°-60°)	886.0	32.1			
FH	(60°-80°)	1066.3	38.6			G1/1800
FVH	(80°-90°)	49.3	1.8			G1/100
BL	(0°-30°)	157.6	5.7	B1/500		
BM	(30°-60°)	255.3	9.2	B1/1000		
BH	(60°-80°)	161.1	5.8	B1/500		G1/500
BVH	(80°-90°)	14.9	0.5			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G1

Type IV Short

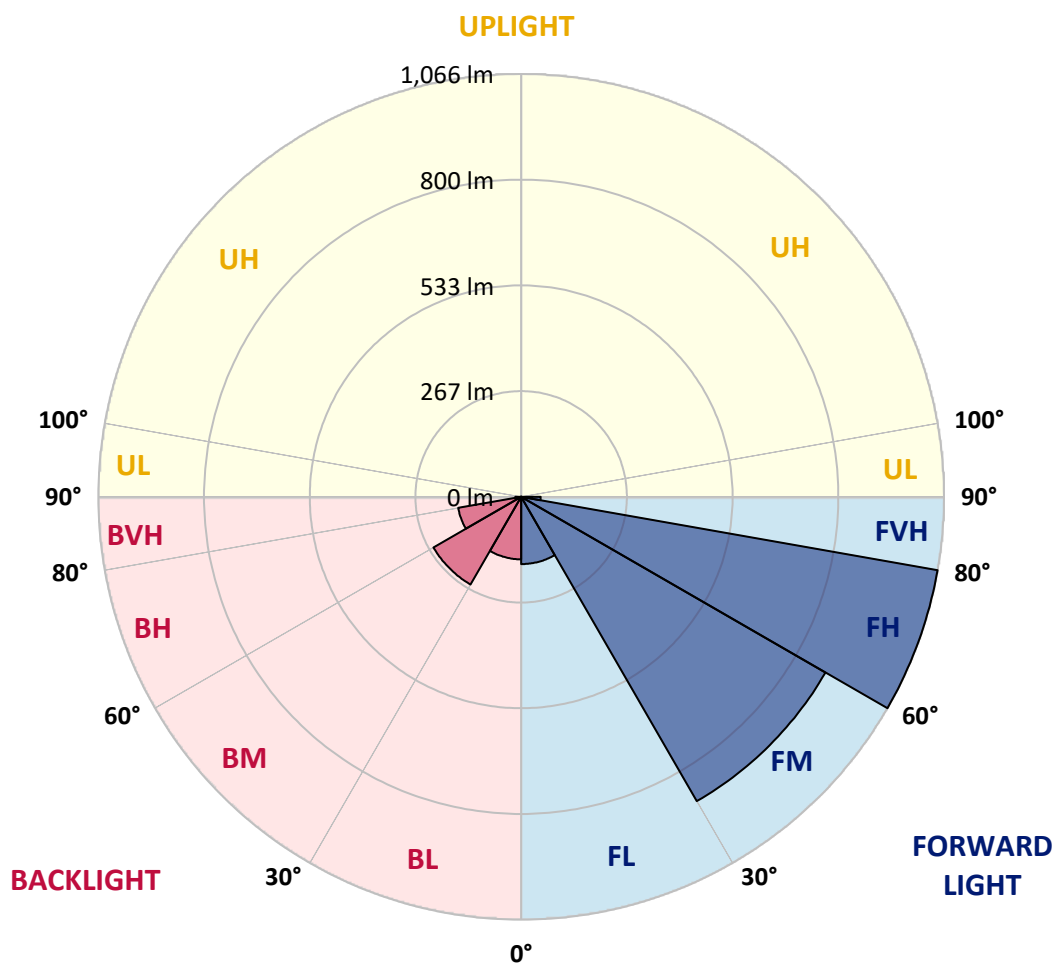



REPORT NUMBER: P156849

CATALOG NUMBER: AVS-E01-LED-E-U-T4-7030

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	47.5°
0°	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8
2.5°	357.1	358.3	357.4	357.7	357.7	358.0	358.0	358.3	358.0	359.0	359.6
5°	350.8	351.3	351.0	351.6	352.2	353.5	353.2	354.7	355.0	355.9	357.4
7.5°	348.3	347.7	348.0	348.9	349.5	350.2	350.8	351.9	352.8	355.0	356.2
10°	350.8	350.5	350.8	351.3	351.3	351.6	351.0	352.2	352.8	354.7	355.9
12.5°	360.7	360.7	360.2	360.2	359.6	359.0	357.4	356.5	356.2	356.5	357.1
15°	376.9	376.3	375.1	374.2	373.0	370.8	368.7	366.8	365.6	363.8	363.2
17.5°	392.7	391.8	390.6	389.4	387.9	385.7	382.4	380.2	376.9	374.8	373.6
20°	411.0	409.2	407.7	406.1	403.1	402.5	399.2	395.4	391.5	386.6	386.0
22.5°	434.7	431.7	429.8	429.0	425.9	425.0	419.5	414.4	409.5	403.1	401.6
25°	458.8	455.8	454.8	453.7	451.5	450.3	445.1	439.3	433.0	424.1	422.3
27.5°	482.3	482.6	480.1	481.0	480.4	478.3	473.2	467.4	462.5	452.1	449.9
30°	511.5	509.6	508.4	510.3	508.1	508.4	503.8	500.8	493.0	486.8	482.6
32.5°	542.0	541.7	543.4	544.7	544.4	543.7	540.1	537.1	530.1	521.2	519.4
35°	583.6	585.5	586.9	592.4	592.4	596.4	592.7	589.1	580.9	570.3	566.6
37.5°	611.9	612.5	618.7	625.9	635.1	643.6	646.0	646.9	643.6	635.6	630.3
40°	637.8	639.1	648.8	660.0	673.5	690.2	700.2	704.8	705.7	702.1	690.2
42.5°	663.7	665.5	675.5	692.0	710.6	731.9	749.5	760.8	767.3	767.3	760.2
45°	693.9	696.3	707.3	725.2	746.8	773.6	797.9	819.6	829.9	830.6	823.8
47.5°	729.4	731.6	744.4	762.7	784.9	811.9	842.7	867.4	886.5	887.8	882.3
50°	775.4	778.4	789.1	805.6	828.4	855.9	886.5	920.9	941.0	945.9	940.1
52.5°	836.4	836.9	845.8	861.0	883.2	909.4	942.0	979.4	1005.9	1009.8	1000.4
55°	920.3	919.5	925.2	941.7	958.4	978.8	1012.6	1054.6	1084.1	1090.3	1080.5
57.5°	1034.5	1033.6	1038.4	1042.5	1073.8	1093.6	1126.7	1166.9	1195.5	1213.3	1196.5
60°	1211.4	1210.5	1218.4	1241.6	1265.0	1293.9	1326.2	1374.3	1414.5	1419.7	1403.2
62.5°	1339.6	1344.1	1361.5	1388.6	1436.1	1492.7	1551.8	1615.1	1697.6	1723.8	1715.9
65°	1294.8	1303.9	1328.0	1369.1	1432.4	1510.7	1603.2	1718.0	1828.5	1890.4	1888.5
66°	1254.6	1264.7	1294.2	1333.8	1400.7	1486.3	1587.4	1712.5	1836.2	1904.4	1908.6
67.5°	1181.6	1192.8	1221.8	1268.6	1333.8	1424.9	1533.5	1669.6	1809.3	1888.8	1900.1
70°	1039.4	1052.2	1073.2	1111.8	1176.1	1257.4	1371.8	1493.7	1640.1	1731.1	1744.8
72.5°	868.9	880.2	903.6	935.2	988.0	1039.1	1128.9	1218.8	1323.4	1427.3	1417.2
75°	623.8	628.7	642.7	677.1	705.4	751.4	823.5	897.2	968.8	1016.3	1022.9
77.5°	324.2	337.0	356.8	394.9	425.6	467.0	513.9	569.3	621.7	665.2	653.4
80°	212.2	217.7	235.3	254.8	277.3	303.8	335.2	355.9	362.6	359.9	362.6
82.5°	122.4	132.4	155.9	170.8	187.6	196.7	221.7	245.4	258.8	242.1	236.0
85°	15.5	20.1	63.3	79.8	91.3	105.1	112.6	126.9	118.4	105.9	129.1
87.5°	3.3	3.0	4.2	9.1	9.4	7.9	14.9	15.9	9.7	4.9	6.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P156849

CATALOG NUMBER: AVS-E01-LED-E-U-T4-7030

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
0°	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8
2.5°	360.2	360.5	361.0	362.0	362.6	363.2	363.8	364.8	365.4	365.9	367.2
5°	358.7	359.9	361.0	362.3	363.8	366.2	367.8	369.0	370.3	372.6	373.6
7.5°	357.7	359.9	361.7	363.8	366.2	368.4	371.1	372.6	374.5	376.0	377.8
10°	357.1	360.2	362.0	365.1	367.8	369.9	373.0	374.8	376.9	378.8	379.7
12.5°	358.3	359.9	361.7	364.8	368.1	371.1	374.5	376.0	377.8	379.4	379.7
15°	363.5	363.5	363.8	366.2	369.6	372.0	374.8	376.3	377.2	378.1	378.1
17.5°	373.0	370.8	369.3	369.6	371.7	373.3	374.8	374.8	374.2	373.9	373.3
20°	383.9	381.1	378.1	376.0	375.3	374.2	373.3	370.3	367.8	365.6	364.1
22.5°	399.8	395.4	391.2	387.3	383.6	379.1	373.9	367.8	362.0	358.0	355.6
25°	419.3	415.9	410.7	404.7	400.0	391.5	384.9	376.0	368.7	363.5	359.3
27.5°	446.9	443.0	438.1	432.6	425.9	416.5	408.3	397.9	389.1	381.5	376.0
30°	481.3	476.2	472.5	465.8	461.2	450.6	442.4	429.5	412.5	400.3	392.7
32.5°	516.7	510.9	507.8	502.7	497.5	491.1	478.5	458.8	436.9	417.1	404.0
35°	563.8	557.7	552.2	547.7	540.1	528.2	517.3	493.5	463.4	435.6	413.8
37.5°	623.2	613.2	599.5	587.9	574.5	557.4	540.7	516.4	482.0	446.0	416.8
40°	686.5	668.9	649.4	627.8	604.7	580.0	560.8	536.2	497.5	454.8	414.6
42.5°	752.6	724.6	697.5	667.0	634.8	605.6	580.6	553.5	509.0	457.3	406.1
45°	818.0	786.7	745.6	705.7	664.9	628.7	600.7	570.3	519.7	458.2	394.9
47.5°	872.2	840.0	793.1	743.2	694.7	653.7	620.7	587.9	534.0	464.6	392.1
50°	929.5	890.3	838.1	779.1	724.2	678.3	643.3	609.2	554.1	481.0	400.9
52.5°	991.9	946.8	885.9	819.9	759.9	708.5	670.4	635.3	579.7	504.1	417.7
55°	1068.0	1013.0	946.8	872.2	808.0	751.1	709.0	667.7	610.2	531.6	438.8
57.5°	1184.4	1116.7	1042.5	957.5	886.2	819.0	768.7	720.9	657.3	572.3	467.4
60°	1394.7	1322.5	1226.0	1123.1	1039.4	960.8	887.2	827.8	749.5	652.7	530.7
62.5°	1696.1	1600.2	1471.4	1327.4	1217.8	1104.6	1021.5	933.2	836.1	731.6	605.3
65°	1863.5	1747.3	1574.9	1407.8	1266.8	1143.8	1038.1	935.9	828.1	728.3	622.6
66°	1884.2	1763.1	1584.0	1408.1	1260.1	1133.8	1022.7	916.7	806.5	711.2	615.3
67.5°	1875.8	1751.8	1567.4	1381.6	1231.2	1095.4	980.6	870.8	760.8	671.9	591.0
70°	1736.0	1618.4	1437.3	1257.4	1114.6	980.6	871.0	762.9	662.2	586.1	526.4
72.5°	1441.6	1341.1	1183.7	1042.5	930.4	819.9	727.0	623.8	538.5	482.3	446.9
75°	1040.6	979.7	836.4	755.3	657.0	583.6	493.5	432.3	371.1	343.7	337.6
77.5°	657.3	575.4	484.4	398.9	327.9	271.9	211.6	179.6	149.7	146.7	177.2
80°	332.7	299.6	230.8	183.9	154.6	125.1	99.0	74.9	52.3	63.0	75.5
82.5°	218.0	181.8	142.5	117.2	102.0	84.7	65.8	45.7	33.5	37.7	51.7
85°	117.8	100.5	80.9	63.9	51.7	46.3	31.1	22.0	21.7	23.1	29.5
87.5°	8.5	8.5	6.7	6.1	7.4	6.1	5.5	5.5	5.2	5.5	7.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P156849

CATALOG NUMBER: AVS-E01-LED-E-U-T4-7030

CANDELA DISTRIBUTION (continued):

	105°	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
0°	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8	363.8
2.5°	367.8	368.7	369.0	370.5	371.4	372.0	372.6	372.6	373.0	373.9	374.2
5°	374.8	376.3	378.1	379.4	380.0	381.8	382.4	382.4	383.0	384.2	385.1
7.5°	379.1	381.1	383.0	383.6	384.9	385.4	386.3	386.9	386.9	388.2	388.8
10°	380.5	381.8	383.6	383.6	384.9	384.9	385.7	386.0	386.0	387.3	388.2
12.5°	380.5	381.1	382.7	382.7	383.6	383.9	385.1	386.0	386.3	387.9	389.1
15°	378.8	379.4	380.5	380.8	383.0	384.2	386.9	388.8	388.8	390.3	390.9
17.5°	373.6	375.1	377.5	380.0	383.9	386.6	390.1	391.5	390.3	389.4	388.5
20°	365.1	367.8	373.6	379.7	386.6	390.3	392.1	390.6	386.3	382.1	379.4
22.5°	356.5	362.0	371.7	380.8	388.8	391.2	390.3	384.9	377.8	372.6	369.0
25°	360.5	366.8	376.3	384.6	389.7	389.1	385.4	377.8	370.3	363.5	357.4
27.5°	376.9	383.9	389.1	391.8	391.2	386.9	381.1	372.6	363.5	354.7	346.1
30°	392.4	396.1	397.3	395.1	390.3	383.3	376.0	366.2	354.1	343.1	333.4
32.5°	399.5	395.8	390.1	384.2	376.3	370.3	360.2	349.5	334.3	321.2	311.5
35°	399.5	384.9	370.3	358.0	346.1	338.5	326.9	312.6	298.7	287.7	280.1
37.5°	390.6	362.6	338.5	318.8	303.8	295.6	278.2	265.5	253.6	249.9	245.1
40°	374.5	333.1	298.3	272.4	253.6	241.5	224.0	215.2	210.7	208.8	208.0
42.5°	352.8	300.2	253.9	222.0	201.6	187.9	176.3	170.8	170.5	170.2	170.2
45°	329.7	264.9	210.7	172.6	154.6	142.5	137.0	134.9	136.7	136.4	136.7
47.5°	315.4	238.0	171.1	130.6	116.9	109.0	106.2	107.2	108.7	108.1	108.1
50°	313.6	224.4	144.7	101.7	91.3	87.4	86.7	86.7	87.7	87.0	86.7
52.5°	320.3	222.3	130.9	87.4	79.2	75.9	75.2	74.9	74.6	72.7	71.2
55°	331.8	227.2	126.9	83.7	75.2	71.5	70.7	70.1	68.8	66.3	63.6
57.5°	355.0	242.4	130.6	85.6	76.4	73.4	72.4	72.4	70.1	66.1	62.1
60°	410.7	281.0	145.5	92.5	82.2	79.2	79.8	79.5	75.9	70.1	63.9
62.5°	482.6	331.5	165.0	102.3	89.5	88.9	91.9	91.3	85.3	76.4	67.6
65°	515.8	355.3	170.5	104.5	91.0	93.8	99.9	99.3	91.6	79.5	68.2
66°	516.4	355.3	168.1	102.6	88.9	92.2	98.3	98.0	90.5	78.2	66.9
67.5°	503.8	345.6	161.0	99.0	84.7	87.0	92.5	92.2	85.3	75.2	64.6
70°	457.0	309.3	143.1	92.5	78.9	77.6	79.5	78.2	73.7	66.6	59.4
72.5°	391.5	259.7	124.9	87.7	74.9	70.1	68.8	67.9	64.2	60.3	55.8
75°	308.4	205.5	109.6	84.0	71.2	64.9	62.7	61.5	59.1	56.4	52.6
77.5°	190.3	147.0	95.6	79.2	68.5	62.1	60.6	58.8	55.1	51.7	49.0
80°	85.0	91.0	78.5	69.1	61.2	55.4	53.0	50.3	46.6	44.5	42.9
82.5°	56.6	58.8	56.9	51.7	46.3	41.7	38.0	38.0	37.4	35.6	35.0
85°	36.3	36.6	35.3	31.9	29.8	27.0	25.6	25.9	27.0	26.8	26.5
87.5°	8.2	8.2	9.7	9.1	10.7	11.3	12.2	13.1	14.9	14.9	15.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P156849

CATALOG NUMBER: AVS-E01-LED-E-U-T4-7030

CANDELA DISTRIBUTION (continued):

	160°	165°	170°	175°	180°
0°	363.8	363.8	363.8	363.8	363.8
2.5°	374.5	375.1	375.6	374.8	375.1
5°	385.1	384.9	386.3	385.4	386.0
7.5°	388.5	388.8	390.1	390.1	390.3
10°	388.8	389.4	390.9	391.8	392.4
12.5°	390.3	391.5	394.0	394.6	394.6
15°	391.5	392.1	393.7	394.3	394.9
17.5°	387.3	386.0	386.6	386.9	386.6
20°	376.6	375.3	375.1	373.9	374.5
22.5°	365.1	361.7	359.6	357.1	357.1
25°	351.0	345.9	341.6	337.3	338.2
27.5°	337.9	331.2	326.9	324.2	323.6
30°	325.2	318.1	314.2	310.9	310.9
32.5°	303.8	299.0	293.8	291.7	291.4
35°	274.3	271.3	267.0	266.1	264.6
37.5°	241.1	240.2	236.6	236.3	234.7
40°	206.4	207.0	205.8	205.2	204.2
42.5°	171.7	174.7	174.2	173.9	173.3
45°	138.5	140.6	140.9	141.9	143.4
47.5°	109.0	109.6	110.3	109.9	110.3
50°	85.3	83.7	83.4	82.5	83.4
52.5°	68.8	66.3	65.2	63.9	63.3
55°	60.6	58.1	56.9	56.4	55.8
57.5°	58.4	56.1	54.2	53.0	52.6
60°	59.1	55.4	53.0	51.5	51.2
62.5°	60.6	55.8	52.3	50.9	50.6
65°	60.3	55.1	52.0	50.3	49.9
66°	59.4	54.5	51.5	49.9	49.6
67.5°	57.8	53.6	50.9	49.6	49.0
70°	55.1	52.3	50.3	48.7	48.1
72.5°	52.6	50.6	48.7	47.2	46.8
75°	49.9	48.1	46.3	45.1	44.8
77.5°	46.6	44.8	43.5	42.6	42.3
80°	41.1	39.9	38.7	37.4	37.4
82.5°	34.1	33.2	31.9	31.1	30.8
85°	26.2	26.2	25.3	24.4	24.0
87.5°	15.5	15.2	15.2	14.3	14.3
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)