

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P150889

Luminaire Tested: **AVS-E02-LED-E-U-SL3-HSS-7030**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P150889
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33727)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-E02-LED-E-U-SL3-HSS-7030
Description: VISION SITE SMALL LED LUMINAIRE
(2) LIGHTBARS WITH AccuLED OPTICS - TYPE 3 W/ SPILL LIGHT CONTROL AND
HOUSE SIDE SHIELD
Light Source: (42) 3000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3167.2 lumens
Efficiency: N/A
Efficacy: 60.8 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 1' x H: 0')
IES Classification: Type III - Short - Non-Cutoff
BUG Rating: B0 - U0 - G1

Input Watts (W): 52.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P150889

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7030

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

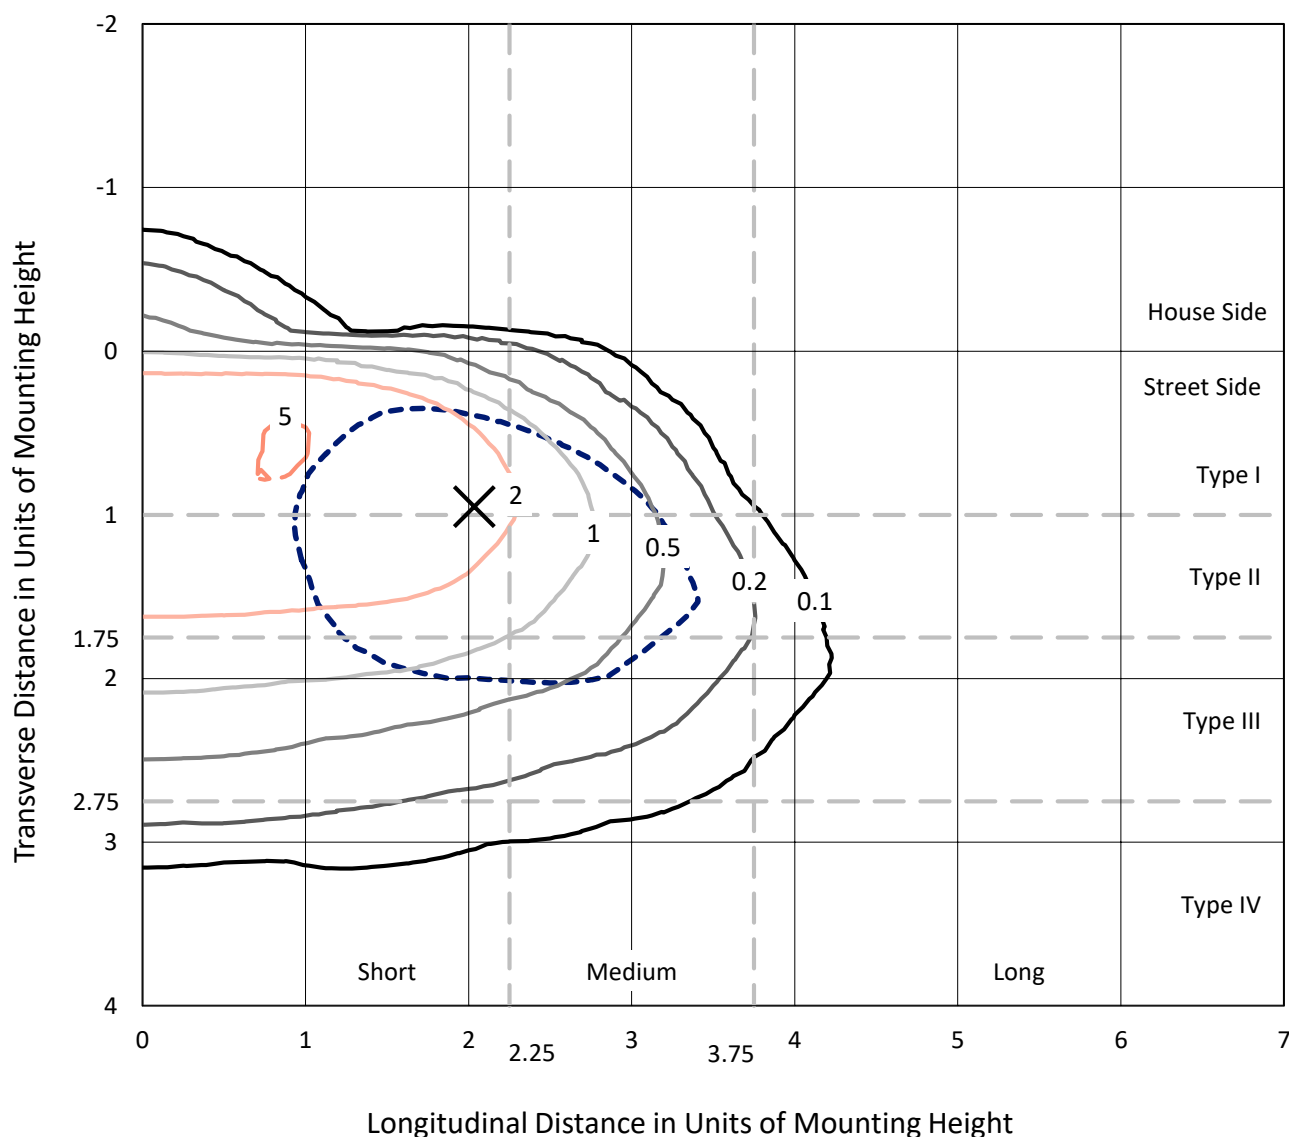


Based on 10 foot mounting height. Maximum calculated value = 5.2 fc
 Type III - Short - Non-Cutoff

REPORT NUMBER: P150889

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7030

Luminous Intensity Polar Plot

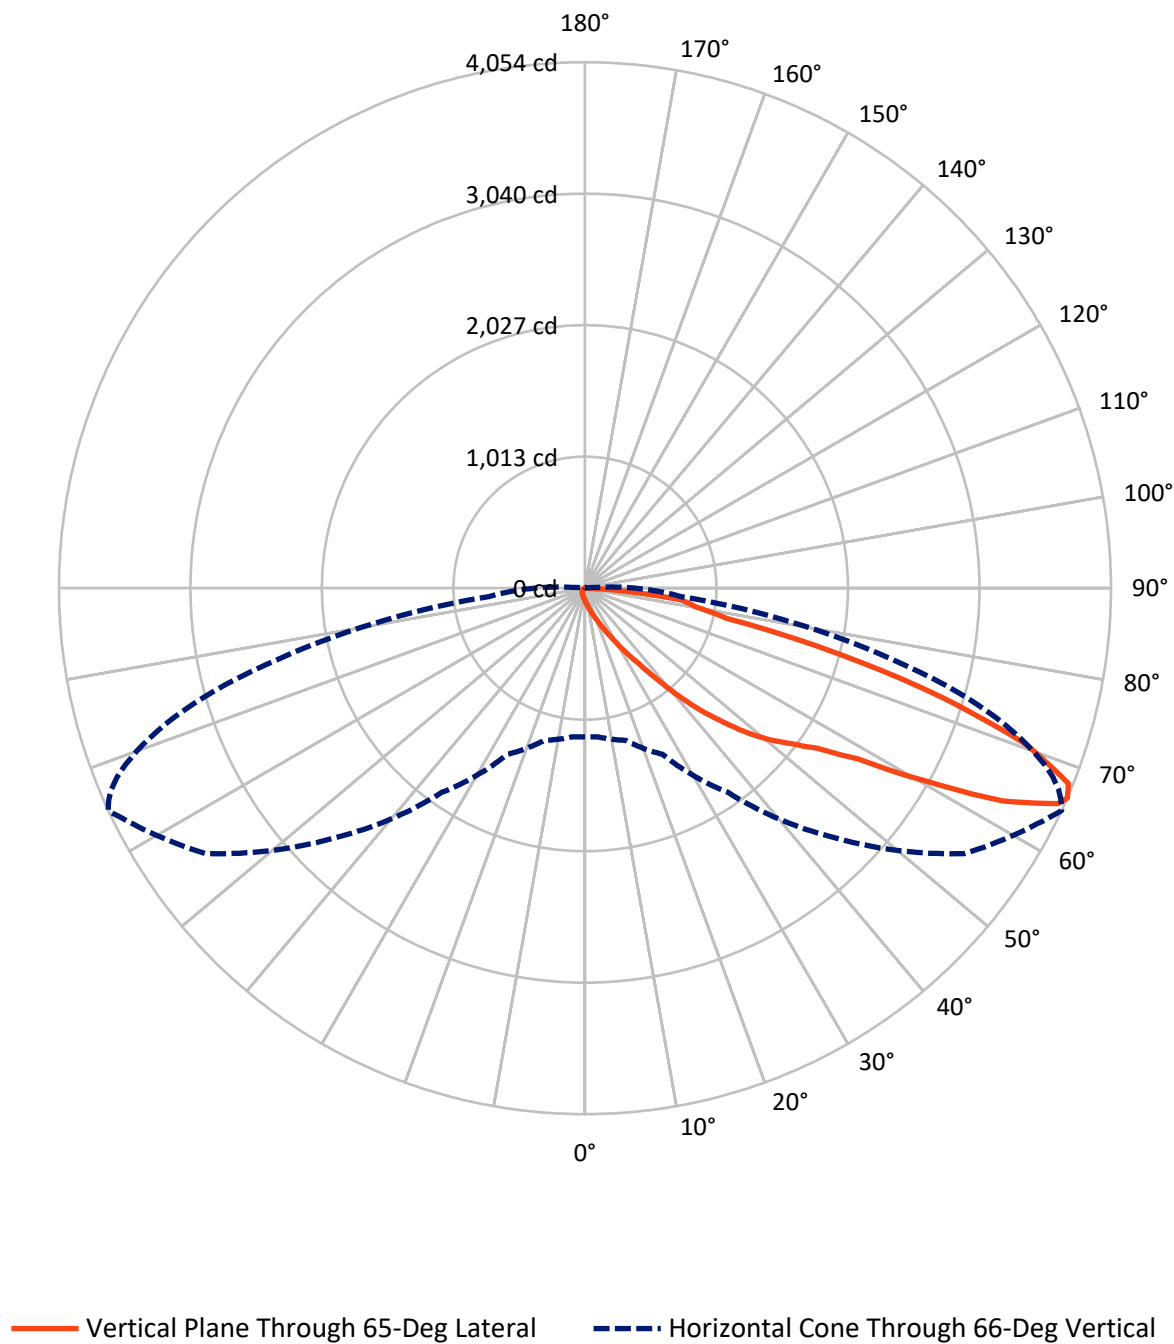

REPORT NUMBER: P150889

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7030


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	68.6	0.0	68.6
	% Fixture	2.2	0.0	2.2
Street Side	Lumens	3098.5	0.0	3098.5
	% Fixture	97.8	0.0	97.8
Total	Lumens	3167.2	0.0	3167.2
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	10.7	0.3
10°-20°	45.4	1.4
20°-30°	97.9	3.1
30°-40°	209.0	6.6
40°-50°	462.2	14.6
50°-60°	783.3	24.7
60°-70°	1045.3	33.0
70°-80°	460.4	14.5
80°-90°	53.0	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	3167.2	100.0
0°-180°	3167.2	100.0

Coefficient of Utilization

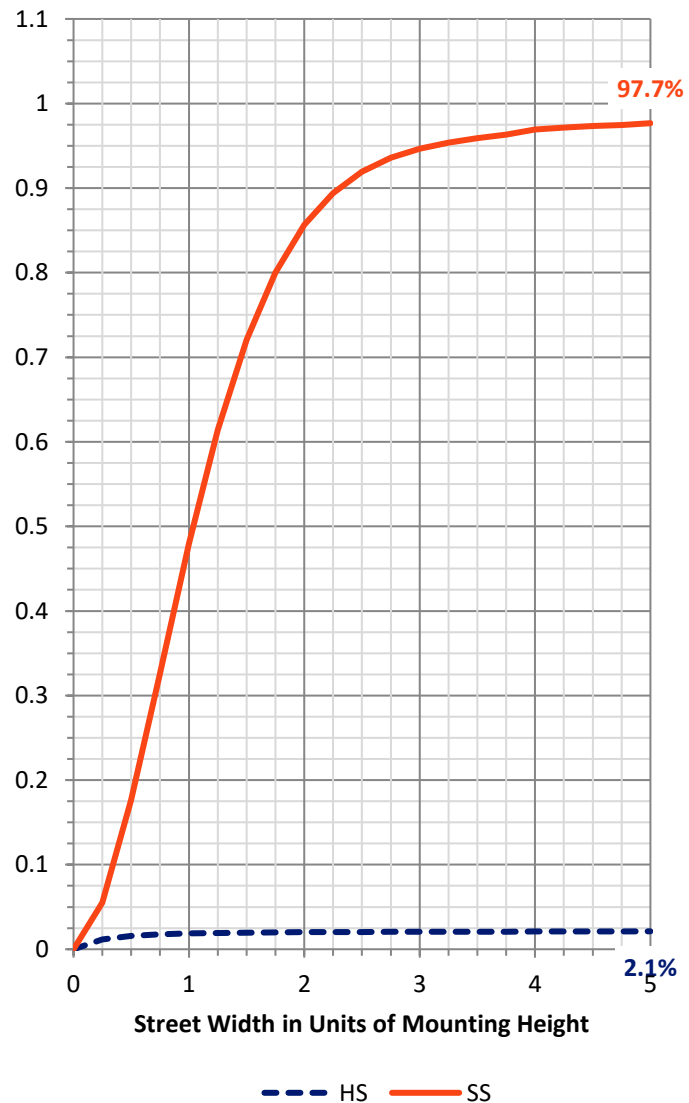

REPORT NUMBER: P150889


CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	132.3	4.2			
FM	(30°-60°)	1424.4	45.0			
FH	(60°-80°)	1490.9	47.1			G1/1800
FVH	(80°-90°)	50.9	1.6			G1/100
BL	(0°-30°)	21.7	0.7	B0/110		
BM	(30°-60°)	30.1	1.0	B0/220		
BH	(60°-80°)	14.7	0.5	B0/110		G0/110
BVH	(80°-90°)	2.1	0.1			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type III Short

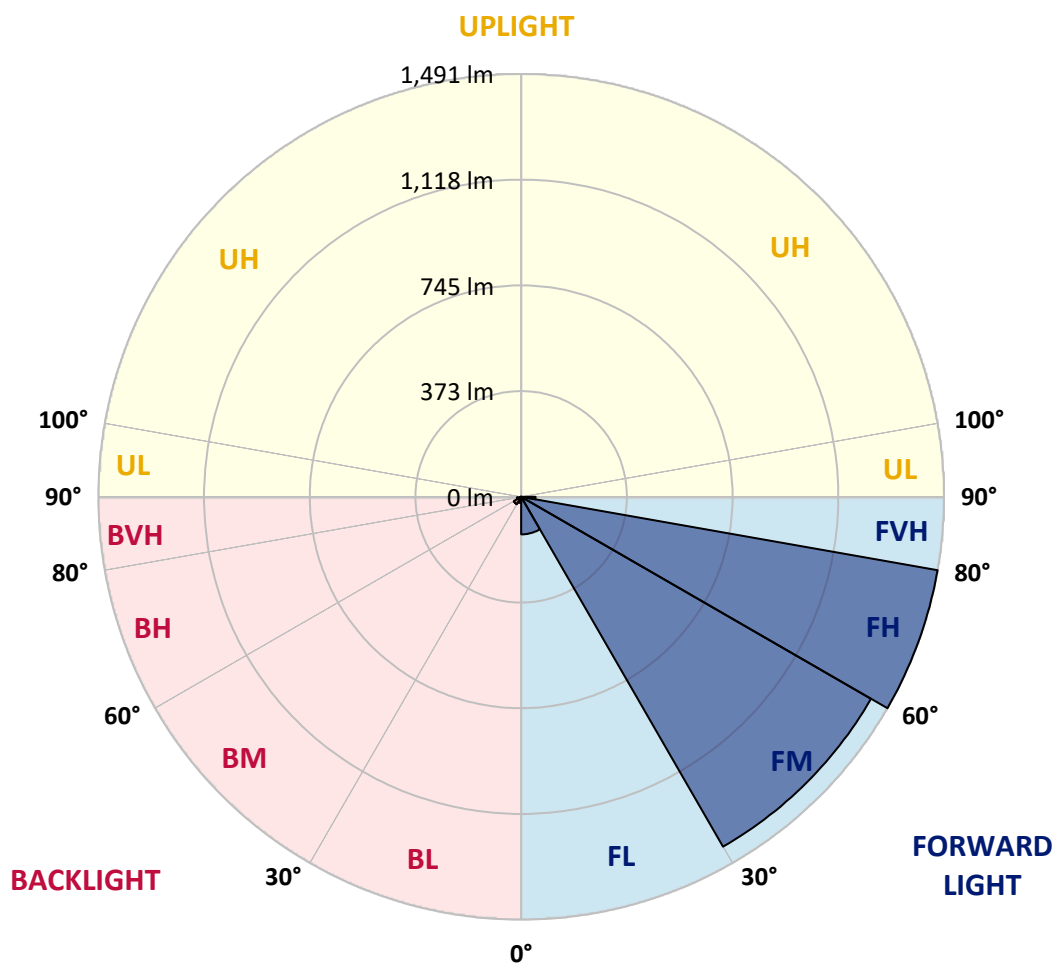



REPORT NUMBER: P150889

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7030

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	66°	67°	68°
0°	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
2.5°	120.5	120.0	117.5	117.5	113.9	111.4	108.4	105.4	105.4	104.8	104.1
5°	159.5	155.9	155.2	148.6	143.1	135.1	127.9	118.1	116.9	115.6	115.1
7.5°	202.8	202.2	196.7	188.8	177.8	163.2	148.6	132.7	130.3	129.1	126.6
10°	258.8	255.8	248.4	235.0	218.5	199.1	175.3	150.4	147.4	144.9	143.7
12.5°	312.3	306.8	302.6	285.6	264.9	236.3	207.7	171.7	169.2	166.2	161.3
15°	362.3	357.4	350.2	335.5	312.3	276.5	242.9	199.1	193.1	188.8	185.1
17.5°	401.2	398.2	389.7	373.3	348.3	316.6	276.5	227.2	222.3	216.8	210.1
20°	438.4	434.2	420.7	398.2	371.4	347.0	316.1	263.6	257.0	250.3	242.9
22.5°	473.7	469.4	447.6	410.4	381.8	371.4	360.5	305.1	294.7	289.2	282.0
25°	523.0	513.9	479.8	420.7	382.4	390.3	409.2	358.7	348.9	340.9	329.4
27.5°	589.4	577.2	523.6	436.0	384.9	411.0	465.2	423.8	413.5	404.4	391.5
30°	664.4	656.4	592.4	472.5	402.5	441.5	527.9	506.6	494.4	483.4	468.3
32.5°	739.8	728.8	665.5	542.0	449.9	500.5	606.4	602.8	586.9	576.6	560.2
35°	806.2	800.7	753.8	655.8	558.3	604.0	711.2	715.4	701.5	690.5	672.2
37.5°	851.2	851.2	842.1	778.1	730.7	764.8	865.3	865.9	851.8	826.8	817.7
40°	874.4	881.0	914.0	926.1	923.7	967.6	1067.4	1056.5	1044.9	1032.1	1001.7
42.5°	921.9	928.0	998.0	1082.0	1136.8	1194.6	1263.4	1259.8	1245.8	1222.7	1194.6
45°	1002.3	1010.2	1093.6	1226.9	1339.6	1421.8	1465.6	1448.6	1434.6	1412.6	1398.0
47.5°	1104.6	1119.8	1214.2	1379.2	1514.9	1650.8	1696.4	1651.3	1639.2	1622.1	1598.3
50°	1213.6	1228.2	1328.6	1517.4	1670.8	1832.7	1908.9	1832.7	1815.1	1809.6	1782.9
52.5°	1307.9	1320.1	1416.9	1623.9	1790.2	1980.1	2091.0	1990.5	1977.7	1959.5	1940.0
55°	1363.9	1373.7	1464.5	1675.1	1871.2	2112.8	2266.9	2178.7	2159.8	2152.4	2124.5
57.5°	1382.8	1392.5	1474.2	1681.8	1915.0	2234.1	2480.6	2483.7	2461.1	2435.0	2426.4
60°	1382.8	1393.8	1462.6	1665.4	1957.6	2363.1	2765.6	3019.6	2970.8	2965.9	2934.9
62.5°	1325.6	1336.0	1405.4	1614.8	2014.8	2537.3	3162.6	3610.8	3596.8	3565.1	3514.0
65°	1201.3	1207.5	1275.6	1485.7	1993.0	2697.4	3506.6	4004.1	3981.6	3919.5	3853.7
66°	1145.4	1150.3	1214.2	1412.0	1921.0	2719.4	3567.6	4053.5	4016.3	3963.9	3889.6
67.5°	1064.4	1072.8	1117.9	1275.0	1748.8	2643.2	3529.2	4018.8	3986.4	3923.1	3848.8
70°	710.6	704.5	863.4	978.5	1332.2	2153.7	3166.3	3608.4	3608.9	3579.1	3549.3
72.5°	337.3	340.9	387.3	602.2	871.9	1438.9	2520.2	2880.1	2921.6	2867.9	2830.8
75°	242.4	247.8	275.9	368.4	520.0	863.4	1633.7	2014.2	2015.4	1920.5	1835.9
77.5°	70.7	73.7	103.5	227.2	389.7	582.7	938.3	1119.8	1093.6	1025.4	961.5
80°	29.2	29.2	30.5	72.4	156.5	395.8	656.4	862.2	859.2	833.0	795.2
82.5°	11.0	11.6	14.6	29.8	37.1	97.4	437.8	748.3	746.5	709.3	682.6
85°	1.2	1.2	3.6	12.7	14.0	18.2	87.7	330.1	328.2	330.1	289.2
87.5°	0.0	0.0	0.6	1.2	1.9	2.5	3.6	12.7	14.0	13.4	12.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150889

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7030

CANDELA DISTRIBUTION (continued):

	69°	70°	71°	72°	73°	74°	75°	76°	77°	78°	79°
0°	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
2.5°	104.1	102.9	102.9	102.3	102.3	102.3	101.7	101.0	101.0	100.5	99.9
5°	113.9	112.6	112.0	110.8	110.3	109.6	108.4	107.8	106.5	105.9	105.4
7.5°	125.4	123.0	122.4	120.5	118.8	117.5	116.3	114.5	113.3	110.8	110.3
10°	140.0	137.0	134.6	132.1	130.3	127.3	125.4	123.0	120.5	118.8	116.9
12.5°	159.0	154.6	151.0	148.6	144.4	140.6	137.0	135.1	130.3	127.9	124.9
15°	179.6	174.7	170.5	165.6	162.6	156.5	151.6	146.1	143.7	139.5	134.6
17.5°	206.4	198.5	191.8	186.9	180.8	174.7	169.2	163.8	156.5	151.6	145.5
20°	235.0	228.3	219.2	210.7	203.4	196.1	188.2	180.8	174.2	166.2	159.0
22.5°	271.6	261.9	250.9	242.4	232.6	224.7	213.7	203.9	193.1	182.7	174.2
25°	317.8	305.1	294.7	282.5	271.0	258.8	245.4	233.2	219.2	209.4	194.8
27.5°	375.1	362.9	348.9	333.1	321.5	303.2	285.6	270.4	253.9	238.7	222.3
30°	448.2	430.5	415.9	400.6	377.5	359.9	339.2	318.4	296.0	280.7	255.8
32.5°	535.9	517.0	495.0	473.2	451.8	426.8	401.2	375.6	350.8	322.7	297.1
35°	643.0	620.5	595.5	571.7	538.9	512.1	479.8	444.5	416.5	384.2	351.9
37.5°	784.9	747.8	725.8	700.8	656.4	619.9	583.9	548.6	499.3	465.2	419.5
40°	962.7	940.7	904.9	864.7	824.5	776.4	727.7	680.7	623.5	576.1	523.0
42.5°	1171.5	1139.3	1102.7	1044.9	1004.0	947.5	892.0	829.9	759.9	699.1	636.9
45°	1367.6	1329.2	1301.2	1243.4	1200.7	1133.8	1066.8	1001.0	920.0	841.5	769.6
47.5°	1579.5	1547.9	1501.6	1454.6	1411.4	1336.0	1263.4	1183.7	1098.4	1005.3	912.1
50°	1765.8	1740.8	1709.2	1652.5	1604.5	1541.1	1455.9	1368.8	1261.0	1168.5	1062.5
52.5°	1924.1	1904.7	1860.2	1820.0	1776.8	1717.1	1641.0	1557.6	1441.2	1339.6	1219.1
55°	2111.1	2097.1	2058.0	2033.2	1994.7	1937.5	1866.3	1788.9	1665.9	1555.1	1418.8
57.5°	2417.3	2406.4	2372.2	2362.0	2324.1	2274.2	2186.5	2103.7	1960.0	1822.5	1666.5
60°	2924.6	2902.6	2852.7	2827.2	2747.4	2680.4	2566.5	2452.6	2279.1	2103.7	1916.2
62.5°	3467.7	3406.2	3311.2	3229.6	3116.4	3000.0	2847.9	2673.7	2470.3	2262.1	2046.5
65°	3760.5	3655.9	3535.9	3406.2	3259.5	3088.3	2896.6	2687.7	2469.1	2249.3	2021.6
66°	3794.1	3676.0	3548.7	3404.4	3241.1	3059.1	2864.2	2645.1	2417.9	2203.6	1975.9
67.5°	3752.0	3628.4	3493.9	3333.7	3157.1	2968.4	2763.8	2536.1	2317.5	2100.1	1878.4
70°	3457.9	3334.9	3215.0	3046.3	2858.1	2668.2	2474.6	2220.0	2013.1	1813.3	1616.1
72.5°	2761.3	2677.9	2559.2	2414.9	2231.6	2008.8	1847.4	1619.7	1440.0	1246.4	1093.6
75°	1725.6	1608.1	1461.3	1277.5	1137.4	956.6	862.2	689.3	586.9	497.5	411.0
77.5°	882.3	794.0	691.1	587.6	488.3	389.7	301.5	213.2	143.7	99.9	74.3
80°	728.8	650.9	565.7	471.3	383.6	297.7	214.3	146.1	93.2	60.9	47.5
82.5°	602.2	536.5	460.3	372.6	296.6	233.8	162.6	105.9	65.8	42.6	33.5
85°	256.4	232.6	179.6	142.5	107.2	79.2	55.4	37.1	26.2	21.3	19.5
87.5°	11.0	12.2	11.6	9.1	6.7	6.7	6.1	4.9	4.9	4.9	4.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150889

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7030

CANDELA DISTRIBUTION (continued):

	80°	81°	82°	83°	84°	85°	95°	105°	115°	125°	135°
0°	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
2.5°	99.9	99.3	98.7	98.7	98.0	97.4	93.8	90.8	87.0	84.7	82.2
5°	104.1	103.5	102.3	101.7	100.5	99.9	91.9	85.3	79.8	75.5	72.4
7.5°	108.4	107.8	105.9	104.1	103.5	102.3	89.5	80.9	73.7	68.8	65.8
10°	113.9	112.0	110.3	107.8	105.9	104.1	87.0	76.1	68.2	63.9	60.9
12.5°	121.8	118.8	115.6	112.6	110.3	107.2	85.9	71.8	63.9	59.1	56.1
15°	130.9	126.6	123.0	119.4	115.1	112.0	83.4	68.2	60.3	55.4	51.7
17.5°	139.5	134.6	129.1	123.6	119.4	115.1	80.9	64.6	56.6	51.7	48.1
20°	151.6	144.4	137.6	130.9	124.9	119.4	77.3	60.9	53.6	48.1	44.5
22.5°	165.0	156.5	148.0	138.9	130.9	123.6	74.3	57.8	50.6	45.1	40.8
25°	182.1	171.7	160.1	148.6	139.5	129.7	71.2	54.8	47.5	42.0	37.7
27.5°	205.8	191.2	178.4	163.8	149.7	138.9	68.8	52.3	44.5	39.0	34.7
30°	238.0	216.8	196.7	180.8	164.4	148.6	66.3	49.3	42.0	36.0	31.1
32.5°	274.0	249.0	225.9	202.2	181.5	163.2	63.9	46.8	39.0	32.8	28.6
35°	318.4	286.8	255.8	228.3	203.4	179.1	61.5	44.5	36.6	29.8	25.6
37.5°	382.4	342.8	302.0	266.7	234.4	202.2	59.7	42.0	33.5	26.8	22.5
40°	470.1	419.0	369.0	320.9	278.9	238.7	57.2	39.6	31.1	24.4	20.1
42.5°	565.1	502.9	437.2	383.0	325.2	274.6	54.8	37.1	28.6	22.0	17.6
45°	683.2	605.9	526.1	452.4	381.8	316.6	52.3	34.7	25.6	19.5	15.2
47.5°	812.2	713.7	623.5	531.0	446.9	369.0	49.3	32.8	23.1	17.1	13.4
50°	945.0	840.9	727.0	621.7	521.9	421.3	46.3	29.8	20.7	15.2	11.0
52.5°	1088.1	965.1	848.8	717.9	601.6	490.2	43.2	27.4	18.9	13.4	9.1
55°	1270.2	1132.5	996.2	849.4	709.3	569.9	40.2	24.4	16.5	11.6	7.4
57.5°	1499.1	1336.0	1168.5	1002.9	833.0	674.6	37.7	21.3	14.0	9.7	6.1
60°	1715.2	1524.7	1322.0	1131.3	939.5	755.0	34.1	18.9	12.2	7.9	6.1
62.5°	1827.4	1609.9	1391.3	1181.2	976.7	783.6	30.5	15.9	10.4	6.7	5.5
65°	1799.9	1578.2	1366.3	1154.5	954.2	765.4	26.8	14.0	9.1	6.1	5.5
66°	1760.3	1541.1	1328.0	1126.4	935.2	745.9	25.0	13.4	8.5	6.1	4.9
67.5°	1673.9	1462.0	1258.5	1071.1	883.5	708.8	22.5	12.2	7.9	5.5	4.9
70°	1429.7	1237.3	1074.7	907.9	755.0	597.3	18.2	10.4	6.7	4.9	4.9
72.5°	946.2	815.3	706.9	608.3	508.4	394.6	15.2	8.5	5.5	4.9	4.2
75°	356.8	322.7	277.1	249.0	217.4	190.6	12.2	5.5	4.2	4.2	4.2
77.5°	63.3	58.4	51.7	47.5	43.8	40.2	9.7	3.6	3.6	4.2	4.2
80°	42.6	39.6	36.0	32.8	30.5	27.4	6.7	3.0	3.6	3.6	4.2
82.5°	30.5	28.6	26.8	24.4	22.5	20.1	4.2	3.0	3.6	3.6	3.6
85°	18.2	17.1	15.9	14.6	12.7	12.2	3.0	3.0	3.0	3.6	3.6
87.5°	4.9	4.2	4.9	4.9	3.6	4.2	2.5	2.5	2.5	3.0	3.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150889

CATALOG NUMBER: AVS-E02-LED-E-U-SL3-HSS-7030

CANDELA DISTRIBUTION (continued):

	145°	155°	165°	175°	180°
0°	95.6	95.6	95.6	95.6	95.6
2.5°	80.9	80.9	79.8	81.6	81.6
5°	70.1	70.1	69.4	70.1	70.1
7.5°	63.9	63.3	63.3	63.3	63.9
10°	58.4	57.8	57.8	57.8	57.8
12.5°	53.6	53.0	52.3	53.0	53.0
15°	49.3	48.1	48.1	48.1	48.1
17.5°	45.7	44.5	43.8	43.8	43.8
20°	42.0	40.2	40.2	40.2	40.2
22.5°	38.3	36.6	36.6	36.6	36.6
25°	34.7	32.8	32.8	32.8	32.8
27.5°	31.7	29.8	29.8	29.8	29.8
30°	28.0	26.8	26.8	27.4	26.8
32.5°	25.6	23.7	23.7	24.4	24.4
35°	22.5	21.3	21.3	21.3	21.3
37.5°	19.5	18.2	18.2	18.2	18.2
40°	17.1	15.9	15.2	15.9	15.9
42.5°	14.6	13.4	12.7	12.7	12.7
45°	12.7	11.0	10.4	11.0	11.0
47.5°	10.4	9.1	9.1	9.7	9.7
50°	7.9	7.9	8.5	9.7	9.7
52.5°	7.4	7.4	8.5	9.7	9.7
55°	6.7	7.4	8.5	9.1	9.7
57.5°	6.1	7.4	8.5	9.1	9.1
60°	6.1	6.7	7.9	9.1	9.1
62.5°	5.5	6.1	7.4	8.5	8.5
65°	5.5	6.1	7.4	8.5	8.5
66°	5.5	6.1	7.4	8.5	8.5
67.5°	5.5	6.1	7.4	8.5	8.5
70°	5.5	6.1	7.4	7.9	7.9
72.5°	4.9	5.5	6.7	7.9	7.9
75°	4.9	5.5	6.7	7.9	7.9
77.5°	4.9	5.5	6.7	7.9	7.9
80°	4.9	5.5	6.7	7.4	7.9
82.5°	4.2	5.5	6.1	7.4	7.4
85°	4.2	4.9	6.1	6.7	7.4
87.5°	3.6	4.2	4.9	6.1	6.1
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)