

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P152029

Luminaire Tested: **AVS-E02-LED-E-U-SL4-HSS-7030**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P152029
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33728)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-E02-LED-E-U-SL4-HSS-7030
Description: VISION SITE SMALL LED LUMINAIRE
(2) LIGHTBARS WITH AccuLED OPTICS - TYPE 4 W/ SPILL LIGHT CONTROL AND HOUSE SIDE SHIELD
Light Source: (42) 3000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3717 lumens
Efficiency: N/A
Efficacy: 71.3 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 1' x H: 0')
IES Classification: Type IV - Short - Semi-Cutoff
BUG Rating: B0 - U0 - G2

Input Watts (W): 52.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P152029

CATALOG NUMBER: AVS-E02-LED-E-U-SL4-HSS-7030

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
- - - 1/2 Max cd

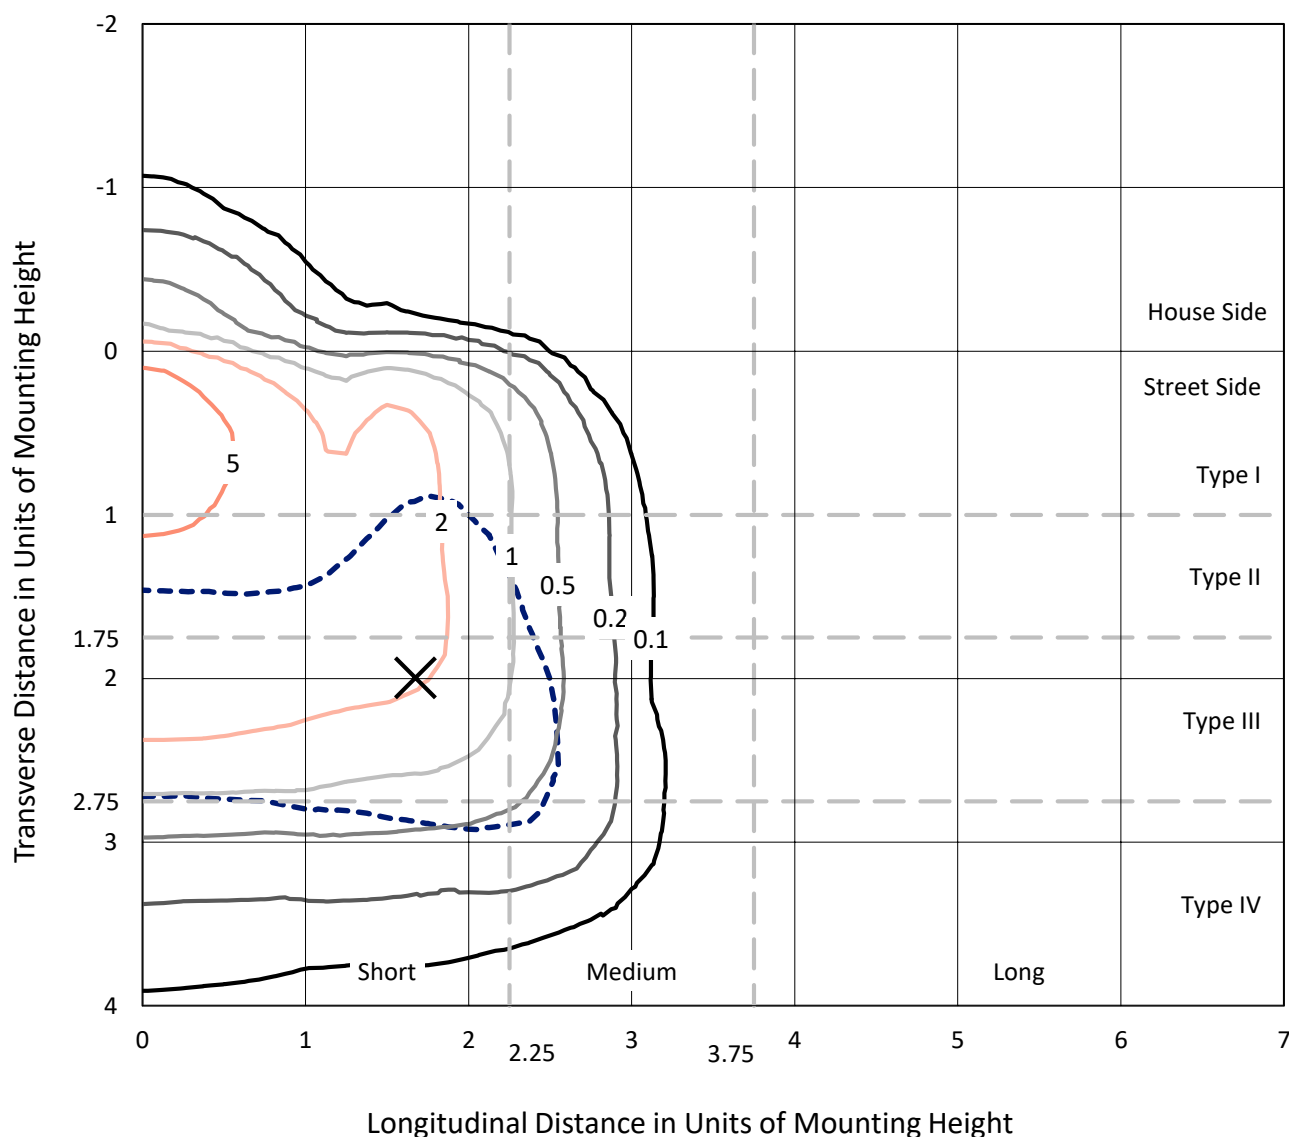


Based on 10 foot mounting height. Maximum calculated value = 8.3 fc
Type IV - Short - Semi-Cutoff

REPORT NUMBER: P152029

CATALOG NUMBER: AVS-E02-LED-E-U-SL4-HSS-7030

Luminous Intensity Polar Plot

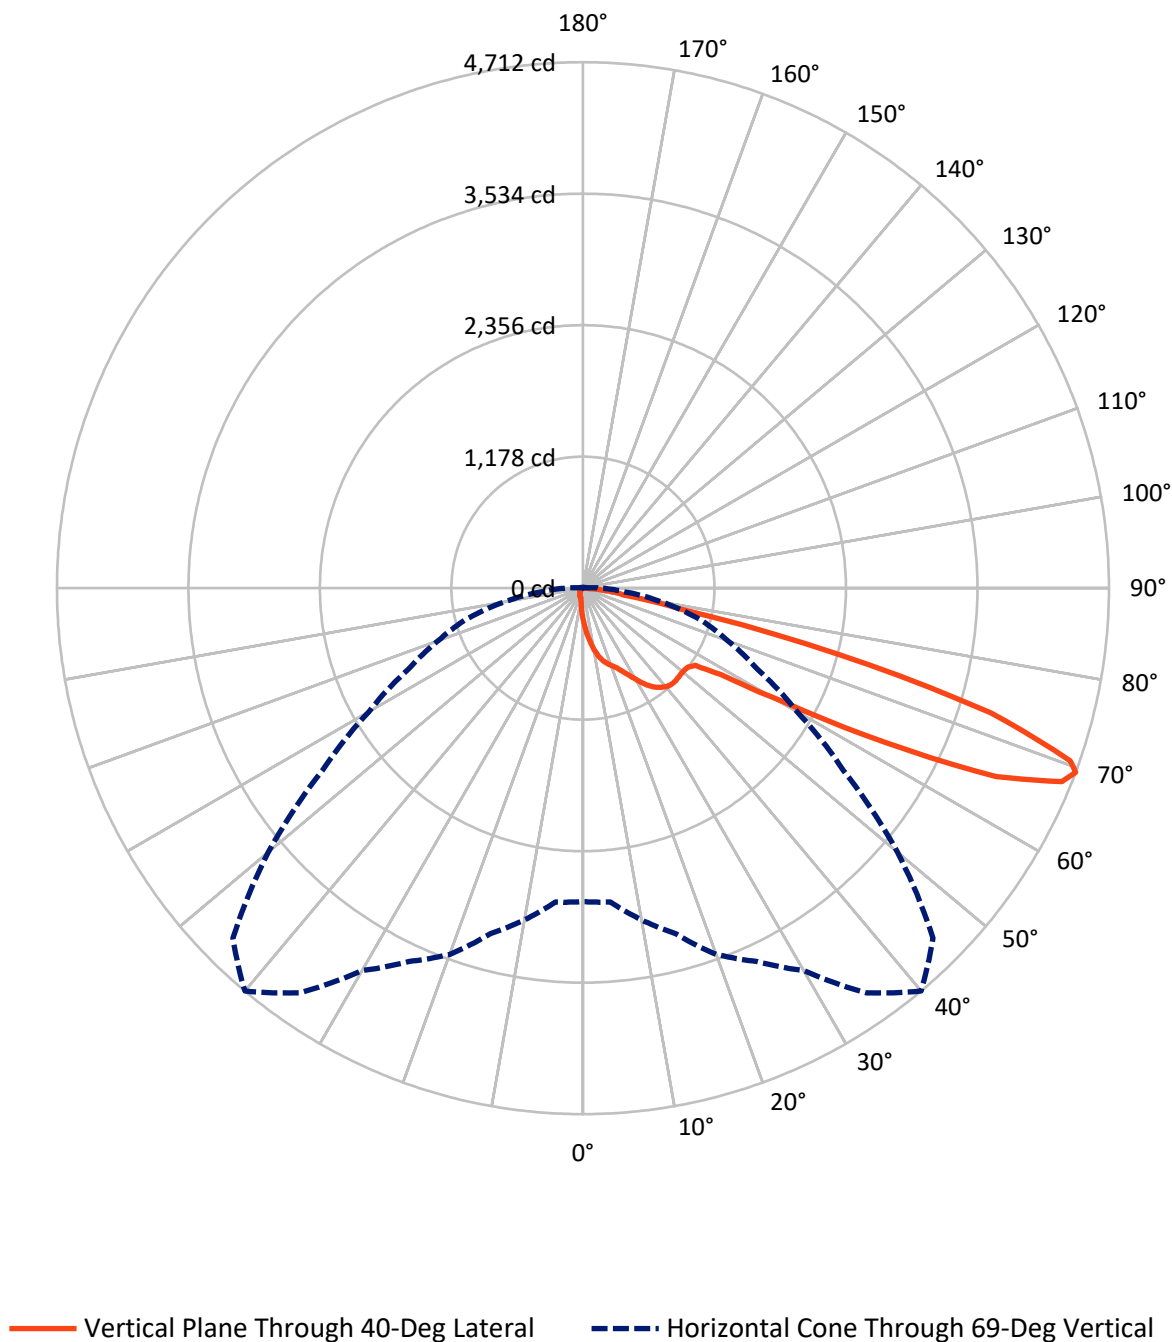

REPORT NUMBER: P152029

CATALOG NUMBER: AVS-E02-LED-E-U-SL4-HSS-7030


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	110.7	0.0	110.7
	% Fixture	3.0	0.0	3.0
Street Side	Lumens	3606.3	0.0	3606.3
	% Fixture	97.0	0.0	97.0
Total	Lumens	3717.0	0.0	3717.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.9	0.8
10°-20°	99.5	2.7
20°-30°	190.4	5.1
30°-40°	316.6	8.5
40°-50°	428.4	11.5
50°-60°	670.0	18.0
60°-70°	1377.6	37.1
70°-80°	554.3	14.9
80°-90°	51.3	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	3717.0	100.0
0°-180°	3717.0	100.0

Coefficient of Utilization

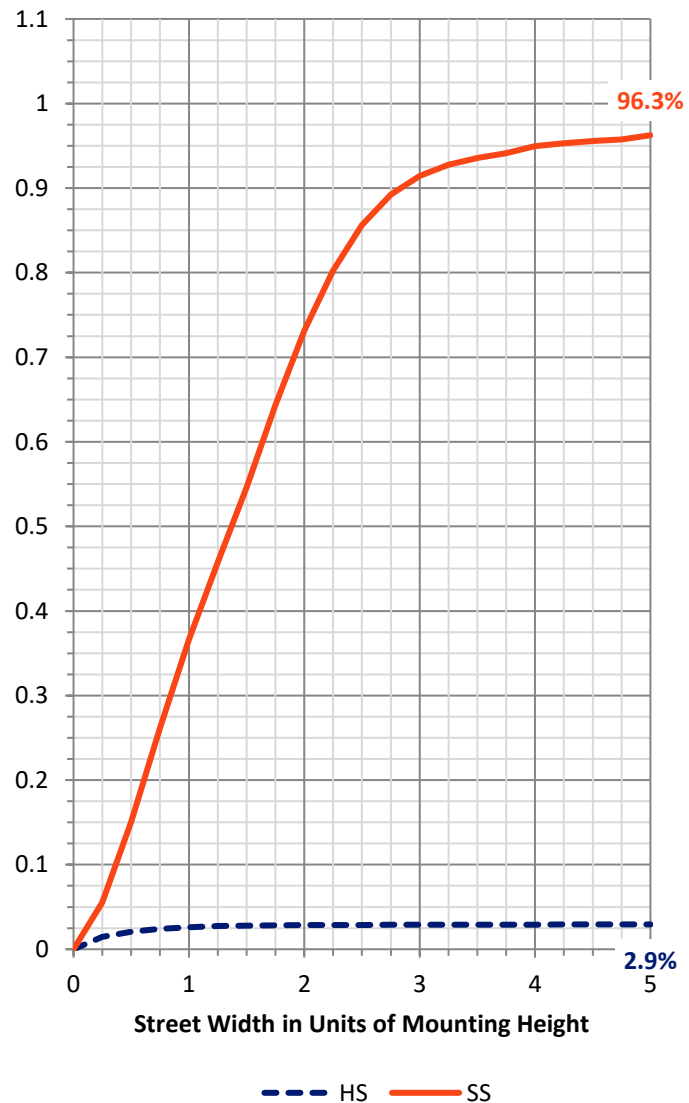

REPORT NUMBER: P152029


CATALOG NUMBER: AVS-E02-LED-E-U-SL4-HSS-7030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	276.6	7.4			
FM	(30°-60°)	1364.6	36.7			
FH	(60°-80°)	1915.7	51.5			G2/5000
FVH	(80°-90°)	49.4	1.3			G1/100
BL	(0°-30°)	42.1	1.1	B0/110		
BM	(30°-60°)	50.5	1.4	B0/220		
BH	(60°-80°)	16.1	0.4	B0/110		G0/110
BVH	(80°-90°)	1.9	0.1			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G2

Type IV Short

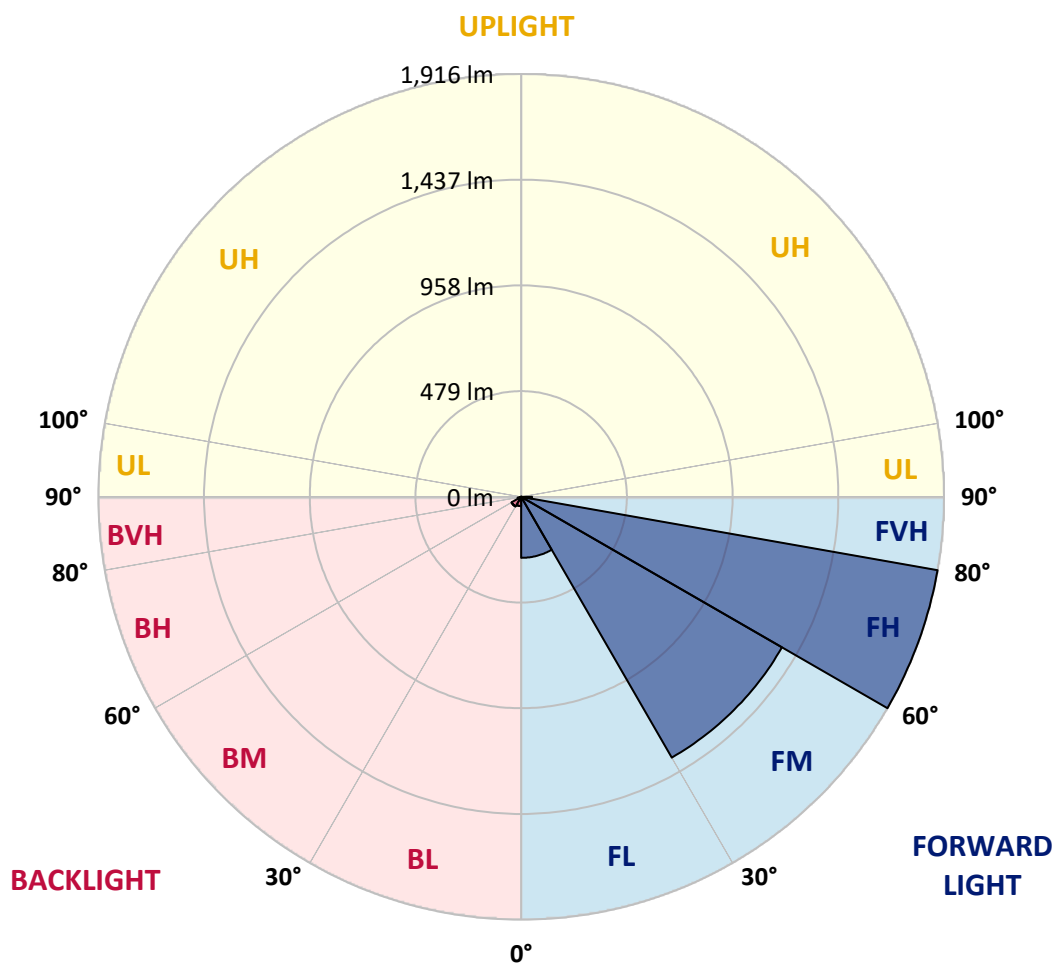



REPORT NUMBER: P152029

CATALOG NUMBER: AVS-E02-LED-E-U-SL4-HSS-7030

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7
2.5°	374.5	370.3	365.4	365.4	359.3	359.3	355.6	345.9	344.7	339.2	333.7
5°	478.0	474.3	468.3	462.8	457.9	449.3	443.3	431.7	419.0	406.7	395.8
7.5°	579.1	577.2	566.3	564.5	556.6	542.5	530.4	513.3	491.4	474.3	454.2
10°	672.8	668.6	666.1	655.8	644.2	629.0	610.2	589.4	563.8	537.1	508.4
12.5°	747.2	744.7	733.7	729.4	717.3	702.1	678.3	651.5	625.9	591.2	557.7
15°	802.5	798.2	791.0	784.2	769.6	756.3	734.3	705.1	674.1	636.3	596.1
17.5°	848.8	840.9	839.1	828.7	813.5	797.6	773.3	746.5	709.9	672.2	628.4
20°	910.9	900.0	896.3	881.0	863.4	841.5	813.5	780.0	741.7	700.2	655.1
22.5°	983.9	976.1	968.2	954.7	932.2	901.1	860.4	823.8	775.1	729.4	680.7
25°	1087.5	1080.8	1068.0	1049.7	1021.8	984.6	935.2	881.7	824.5	766.0	708.8
27.5°	1188.0	1181.9	1172.7	1158.8	1127.0	1086.3	1025.4	957.2	884.8	814.1	750.8
30°	1282.4	1276.9	1267.8	1253.7	1225.7	1185.5	1116.7	1043.6	953.6	871.3	795.2
32.5°	1384.0	1382.2	1371.8	1351.7	1327.4	1273.2	1198.3	1119.8	1028.4	933.5	844.6
35°	1499.1	1485.1	1475.3	1455.2	1413.9	1356.1	1268.3	1182.5	1086.3	988.8	889.6
37.5°	1596.6	1583.1	1571.0	1545.4	1494.8	1421.1	1322.0	1227.6	1128.3	1029.0	928.0
40°	1667.8	1661.0	1646.4	1613.0	1556.4	1468.7	1361.5	1258.5	1158.8	1058.9	959.1
42.5°	1720.7	1710.4	1694.0	1659.3	1592.2	1492.4	1377.3	1271.4	1172.7	1077.1	979.1
45°	1740.2	1731.7	1716.5	1678.8	1606.3	1499.1	1376.7	1267.8	1173.4	1082.6	992.5
47.5°	1728.7	1720.1	1706.7	1671.4	1600.2	1491.2	1365.8	1257.4	1167.3	1084.5	1004.7
50°	1690.3	1685.4	1675.1	1645.3	1581.3	1476.0	1356.1	1251.9	1166.0	1093.6	1021.8
52.5°	1686.6	1683.6	1670.8	1641.0	1575.9	1471.1	1354.8	1254.9	1176.4	1105.2	1033.9
55°	2061.1	2017.9	1921.0	1838.9	1703.7	1542.9	1416.3	1304.2	1220.2	1150.8	1100.9
57.5°	2929.4	2864.9	2737.6	2581.1	2270.6	1965.5	1721.3	1544.8	1457.7	1426.0	1444.9
60°	3336.2	3324.6	3304.5	3230.3	3071.3	2808.8	2516.6	2200.5	2073.9	2063.0	2101.3
62.5°	3529.2	3521.9	3528.0	3518.9	3469.5	3392.7	3308.8	3172.3	3046.9	2965.9	2794.2
65°	3618.1	3623.0	3657.6	3685.1	3691.2	3711.3	3772.7	3942.6	4066.8	3858.0	3381.2
67.5°	3392.2	3420.8	3500.5	3600.4	3717.3	3830.6	4013.3	4371.3	4626.4	4381.0	3703.9
69°	2808.3	2822.3	3017.1	3205.3	3490.8	3690.6	3955.4	4424.9	4711.7	4434.6	3678.3
70°	2210.9	2223.7	2432.5	2688.3	3171.2	3428.1	3774.6	4334.2	4631.9	4363.4	3546.8
72.5°	997.4	979.1	1052.7	1189.7	1714.6	2122.6	2728.5	3511.5	3821.5	3495.6	2653.6
75°	696.6	688.7	696.6	697.2	778.8	1004.7	1267.8	1903.4	2354.0	2031.3	1267.8
77.5°	539.5	534.0	528.5	522.5	532.2	596.1	621.7	675.2	876.8	829.3	483.4
80°	426.8	422.0	435.3	431.1	431.1	438.4	433.6	413.5	375.6	348.3	311.7
82.5°	198.5	199.7	199.7	216.8	261.2	305.1	319.1	299.0	265.5	225.9	182.1
85°	18.9	21.3	36.0	55.4	110.3	124.2	124.9	103.5	103.5	81.6	65.8
87.5°	0.0	0.6	0.6	0.6	5.5	15.2	12.7	3.6	1.9	1.9	3.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152029

CATALOG NUMBER: AVS-E02-LED-E-U-SL4-HSS-7030

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7
2.5°	323.9	322.1	314.8	307.5	300.8	293.5	286.8	280.1	272.7	267.4	260.6
5°	378.8	365.4	350.2	335.5	320.9	305.7	289.8	275.9	261.2	247.8	235.0
7.5°	434.2	408.0	387.3	361.0	337.3	313.6	291.7	269.1	248.4	228.9	210.7
10°	481.0	449.3	417.1	383.6	349.5	317.8	287.4	260.6	233.2	209.4	186.9
12.5°	519.4	479.2	439.6	397.6	359.3	319.1	281.3	249.0	216.8	189.9	166.8
15°	554.1	507.8	460.3	411.6	362.9	317.2	275.2	235.0	202.2	171.7	145.5
17.5°	582.1	529.1	475.5	420.7	368.4	314.8	267.4	225.3	186.9	155.2	129.7
20°	606.4	551.1	493.2	431.7	372.0	314.2	260.6	213.2	173.6	140.0	115.1
22.5°	629.0	573.6	511.5	445.7	377.5	313.6	254.5	203.9	162.0	128.5	103.5
25°	654.6	596.1	531.0	460.3	387.3	316.1	250.9	196.7	151.6	117.5	94.4
27.5°	683.2	621.7	554.1	478.5	400.0	320.9	249.6	188.8	142.5	107.2	87.0
30°	723.4	652.1	577.2	496.9	411.6	326.3	248.4	183.9	133.4	99.3	79.8
32.5°	758.7	682.0	602.8	515.8	424.4	331.8	247.8	177.2	124.9	91.3	74.3
35°	795.9	709.3	624.8	534.0	435.3	337.9	247.3	172.3	116.9	83.4	68.8
37.5°	828.1	732.5	641.8	549.8	447.6	343.4	247.8	168.1	109.6	76.7	63.9
40°	855.5	756.3	660.6	564.5	460.3	351.9	248.4	163.8	102.3	70.7	59.7
42.5°	879.9	778.8	680.7	580.9	474.9	361.7	252.1	160.1	96.2	65.2	55.4
45°	898.8	799.5	702.7	604.0	498.7	377.5	258.8	157.7	90.2	60.3	51.7
47.5°	918.2	829.9	739.8	640.5	533.4	402.5	270.4	157.1	85.3	56.6	48.7
50°	945.0	860.4	772.7	677.7	565.1	428.1	284.4	157.7	79.2	53.0	45.7
52.5°	964.5	891.4	815.3	742.3	640.5	506.0	338.5	168.7	76.1	49.9	42.0
55°	1079.6	1066.8	1068.6	1080.8	1002.3	861.0	566.3	243.5	89.5	56.6	41.5
57.5°	1522.3	1567.4	1593.5	1592.8	1463.2	1213.6	760.5	313.0	99.9	65.8	49.3
60°	2104.4	2070.3	2022.2	1903.4	1731.1	1385.3	850.7	336.7	86.4	52.3	45.1
62.5°	2618.9	2419.2	2242.0	2049.5	1823.6	1444.9	868.9	334.9	75.5	39.6	31.7
65°	2939.8	2580.5	2294.3	2053.2	1787.2	1395.0	822.0	307.5	63.9	32.2	26.2
67.5°	3016.5	2493.5	2088.5	1781.0	1493.1	1085.7	603.4	231.4	49.9	26.8	23.1
69°	2849.0	2216.4	1730.5	1381.6	1086.3	720.3	373.3	146.1	38.3	24.4	21.3
70°	2620.7	1927.8	1409.6	1108.8	804.4	506.0	261.2	102.9	31.1	22.5	19.5
72.5°	1686.0	1012.6	693.0	482.3	331.8	201.6	102.3	46.3	23.7	18.9	15.9
75°	654.0	374.5	271.6	206.4	161.3	112.0	62.1	29.8	20.1	15.9	12.2
77.5°	322.1	246.6	201.6	138.2	80.4	49.9	33.5	23.1	16.5	11.6	7.9
80°	254.5	169.2	101.0	62.7	47.5	36.0	25.6	18.9	12.2	7.4	5.5
82.5°	130.3	71.2	52.3	42.6	35.3	28.0	20.7	13.4	7.9	4.9	4.2
85°	40.8	29.8	26.8	26.2	24.4	20.1	14.6	8.5	4.9	3.0	3.0
87.5°	3.0	4.2	5.5	4.2	4.9	4.2	5.5	3.6	2.5	2.5	1.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152029

CATALOG NUMBER: AVS-E02-LED-E-U-SL4-HSS-7030

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7	280.7
2.5°	255.8	248.4	241.8	237.5	229.5	226.5	223.4	222.3	216.8	218.0	213.2
5°	223.4	210.7	200.9	191.2	182.1	175.3	169.8	163.2	157.7	155.2	150.4
7.5°	194.2	177.8	165.0	154.6	143.7	135.1	127.9	123.0	118.1	113.3	110.8
10°	168.7	151.0	136.4	126.0	115.6	108.4	102.9	99.3	96.2	94.4	93.8
12.5°	144.9	127.9	114.5	105.4	97.4	93.8	91.3	89.5	88.9	88.3	88.3
15°	126.6	109.6	99.3	92.5	88.9	87.0	86.4	85.3	84.0	83.4	83.4
17.5°	109.6	96.8	89.5	85.9	84.0	82.8	81.6	80.4	79.2	78.5	78.5
20°	98.0	87.7	84.0	81.6	79.8	78.5	76.7	75.5	74.9	74.3	73.7
22.5°	88.9	82.2	79.8	77.9	75.5	73.7	72.4	71.2	70.1	69.4	68.8
25°	82.2	77.9	76.1	73.7	71.2	69.4	67.6	65.8	64.6	63.9	62.7
27.5°	77.3	74.3	71.8	68.8	66.3	64.6	62.7	60.9	59.7	58.4	57.8
30°	73.1	70.1	66.9	64.6	61.5	59.7	57.2	55.4	54.8	53.6	52.3
32.5°	68.8	65.8	62.7	59.7	56.6	54.2	53.0	50.6	49.3	48.7	47.5
35°	63.9	60.9	57.2	54.8	51.7	49.3	47.5	45.7	44.5	43.2	42.6
37.5°	59.7	56.1	52.3	49.3	46.8	44.5	42.6	40.8	39.6	38.3	37.7
40°	54.8	51.2	47.5	44.5	42.0	40.2	38.3	36.6	35.3	34.7	34.7
42.5°	50.6	46.3	42.6	40.2	38.3	36.0	34.1	32.2	31.7	31.1	31.7
45°	46.3	42.0	39.0	36.6	34.7	32.2	30.5	29.2	28.6	29.2	29.8
47.5°	42.6	38.3	35.3	33.5	31.7	29.8	28.0	26.8	26.8	28.0	29.2
50°	39.0	34.7	32.2	31.1	29.2	27.4	25.0	24.4	25.0	26.2	27.4
52.5°	35.3	30.5	28.6	28.0	26.2	24.4	22.5	22.0	22.5	23.7	23.1
55°	31.7	26.8	26.2	25.6	23.7	21.3	19.5	19.5	19.5	18.9	17.6
57.5°	30.5	23.7	23.1	22.5	20.7	18.2	17.1	15.9	15.2	13.4	12.7
60°	31.7	21.3	21.3	20.1	18.2	15.9	14.0	12.2	11.0	9.7	9.7
62.5°	25.6	19.5	18.9	17.6	15.2	12.7	11.0	9.1	8.5	7.9	7.9
65°	20.7	17.6	16.5	14.6	12.7	10.4	8.5	7.4	6.7	6.7	7.4
67.5°	18.9	15.9	14.0	12.2	10.4	7.9	6.7	6.1	6.1	6.7	6.7
69°	17.6	14.6	12.7	11.0	9.1	7.4	6.1	6.1	6.1	6.1	6.7
70°	16.5	14.0	12.2	10.4	7.9	6.1	5.5	5.5	6.1	6.1	6.7
72.5°	12.7	11.0	10.4	8.5	6.1	5.5	4.9	5.5	5.5	6.1	6.1
75°	9.7	7.9	7.9	6.7	4.9	4.2	4.2	4.9	4.9	5.5	5.5
77.5°	6.7	5.5	5.5	4.9	4.2	3.6	3.6	4.2	4.9	4.9	5.5
80°	4.9	4.2	3.6	4.2	3.6	3.0	3.6	4.2	4.2	4.9	4.9
82.5°	3.6	3.6	3.6	3.6	3.0	3.0	3.6	3.6	4.2	4.9	4.9
85°	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.6	3.6	4.2	4.2
87.5°	1.9	1.9	1.9	2.5	2.5	3.0	3.0	3.0	3.0	3.6	3.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P152029

CATALOG NUMBER: AVS-E02-LED-E-U-SL4-HSS-7030

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	280.7	280.7	280.7	280.7
2.5°	211.9	211.3	208.8	209.4
5°	148.6	144.9	147.4	146.7
7.5°	109.0	108.4	107.8	109.0
10°	93.2	93.2	92.5	93.2
12.5°	87.7	87.7	87.7	87.7
15°	83.4	83.4	82.8	82.8
17.5°	78.5	78.5	78.5	77.9
20°	73.7	73.1	73.1	73.1
22.5°	68.2	67.6	67.6	67.6
25°	62.7	62.1	62.1	62.1
27.5°	57.2	56.6	56.1	56.1
30°	51.7	51.2	50.6	50.6
32.5°	46.3	45.7	45.1	45.1
35°	41.5	41.5	40.8	40.2
37.5°	37.1	37.1	37.1	37.1
40°	34.1	34.7	34.7	34.7
42.5°	32.2	32.8	33.5	34.1
45°	31.1	32.2	32.8	32.8
47.5°	30.5	31.1	31.7	31.7
50°	28.0	27.4	27.4	27.4
52.5°	22.5	21.3	20.7	20.1
55°	16.5	15.9	14.6	14.6
57.5°	11.6	11.6	11.0	11.0
60°	9.1	9.1	8.5	9.1
62.5°	7.9	7.9	7.9	7.9
65°	7.4	7.4	7.4	7.4
67.5°	7.4	7.4	7.4	7.4
69°	6.7	6.7	6.7	6.7
70°	6.7	6.7	6.7	6.7
72.5°	6.1	6.1	6.1	6.1
75°	5.5	6.1	6.1	6.1
77.5°	5.5	5.5	5.5	5.5
80°	4.9	4.9	5.5	5.5
82.5°	4.9	4.9	4.9	4.9
85°	4.2	4.2	4.9	4.9
87.5°	3.6	3.6	4.2	4.2
90°	0.0	0.0	0.0	0.0

(END OF REPORT)