

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P152607

Luminaire Tested: **AVS-F02-LED-E-U-SL4-7060**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P152607
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33680)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-F02-LED-E-U-SL4-7060
Description: VISION SITE SMALL LED LUMINAIRE
(2) LIGHTBARS WITH AccuLED OPTICS - TYPE 4 W/ SPILL LIGHT CONTROL
Light Source: (14) 5700K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5004.7 lumens
Efficiency: N/A
Efficacy: 91.0 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 1' x H: 0')
IES Classification: Type IV - Short - Full Cutoff
BUG Rating: B1 - U0 - G2

Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P152607

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-7060

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 --- 1/2 Max cd

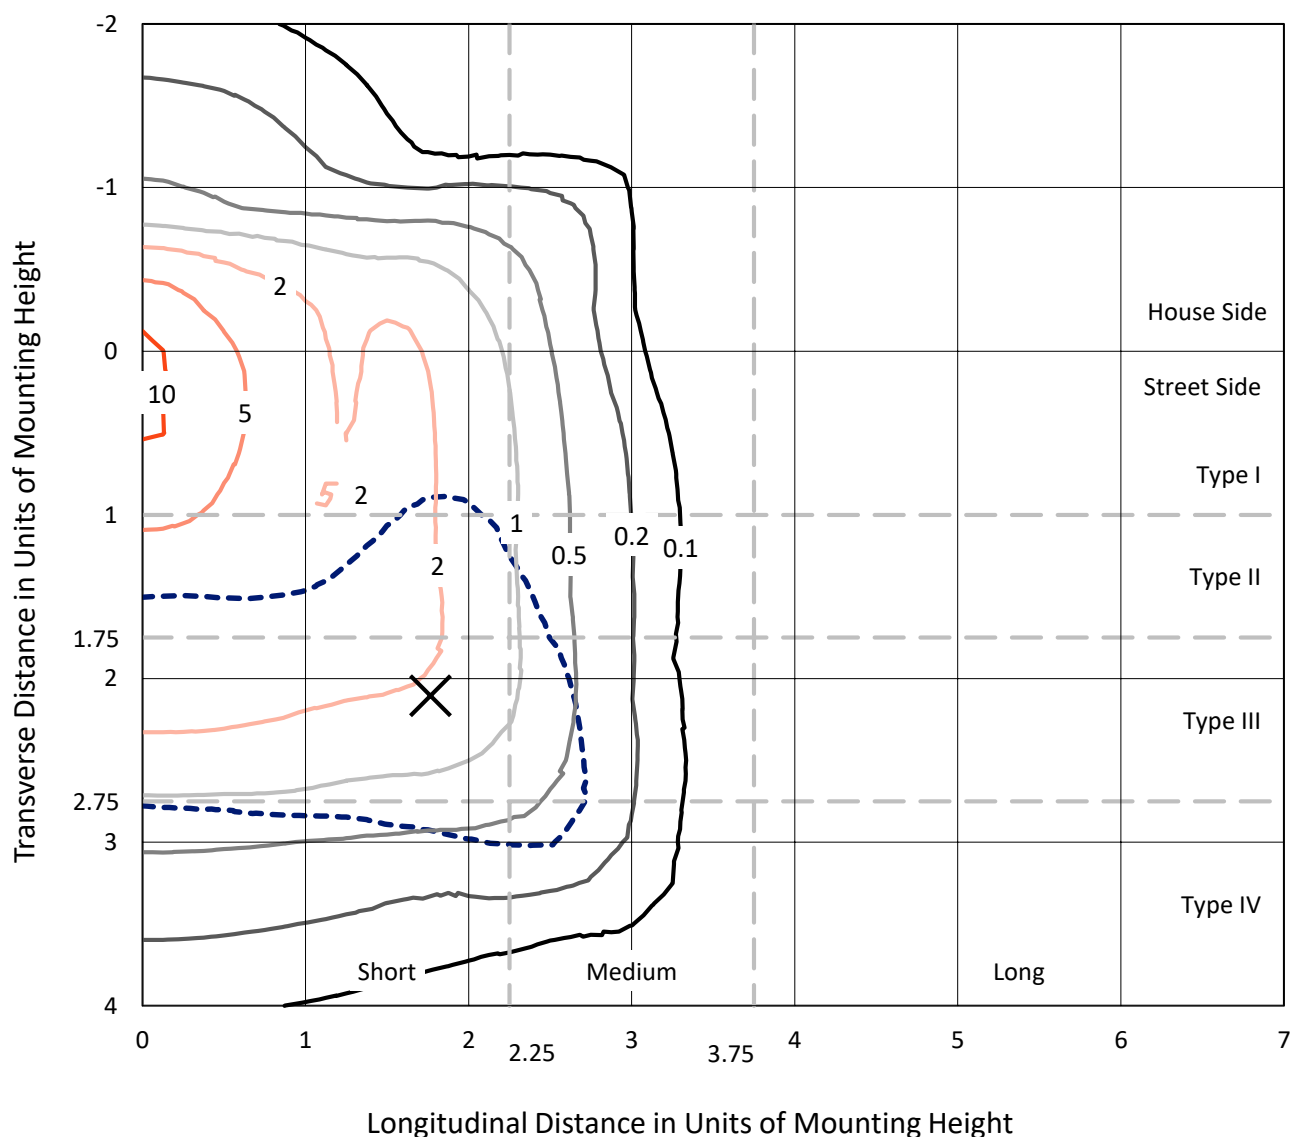


Based on 10 foot mounting height. Maximum calculated value = 10.7 fc
 Type IV - Short - Full Cutoff

REPORT NUMBER: P152607

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-7060

Luminous Intensity Polar Plot

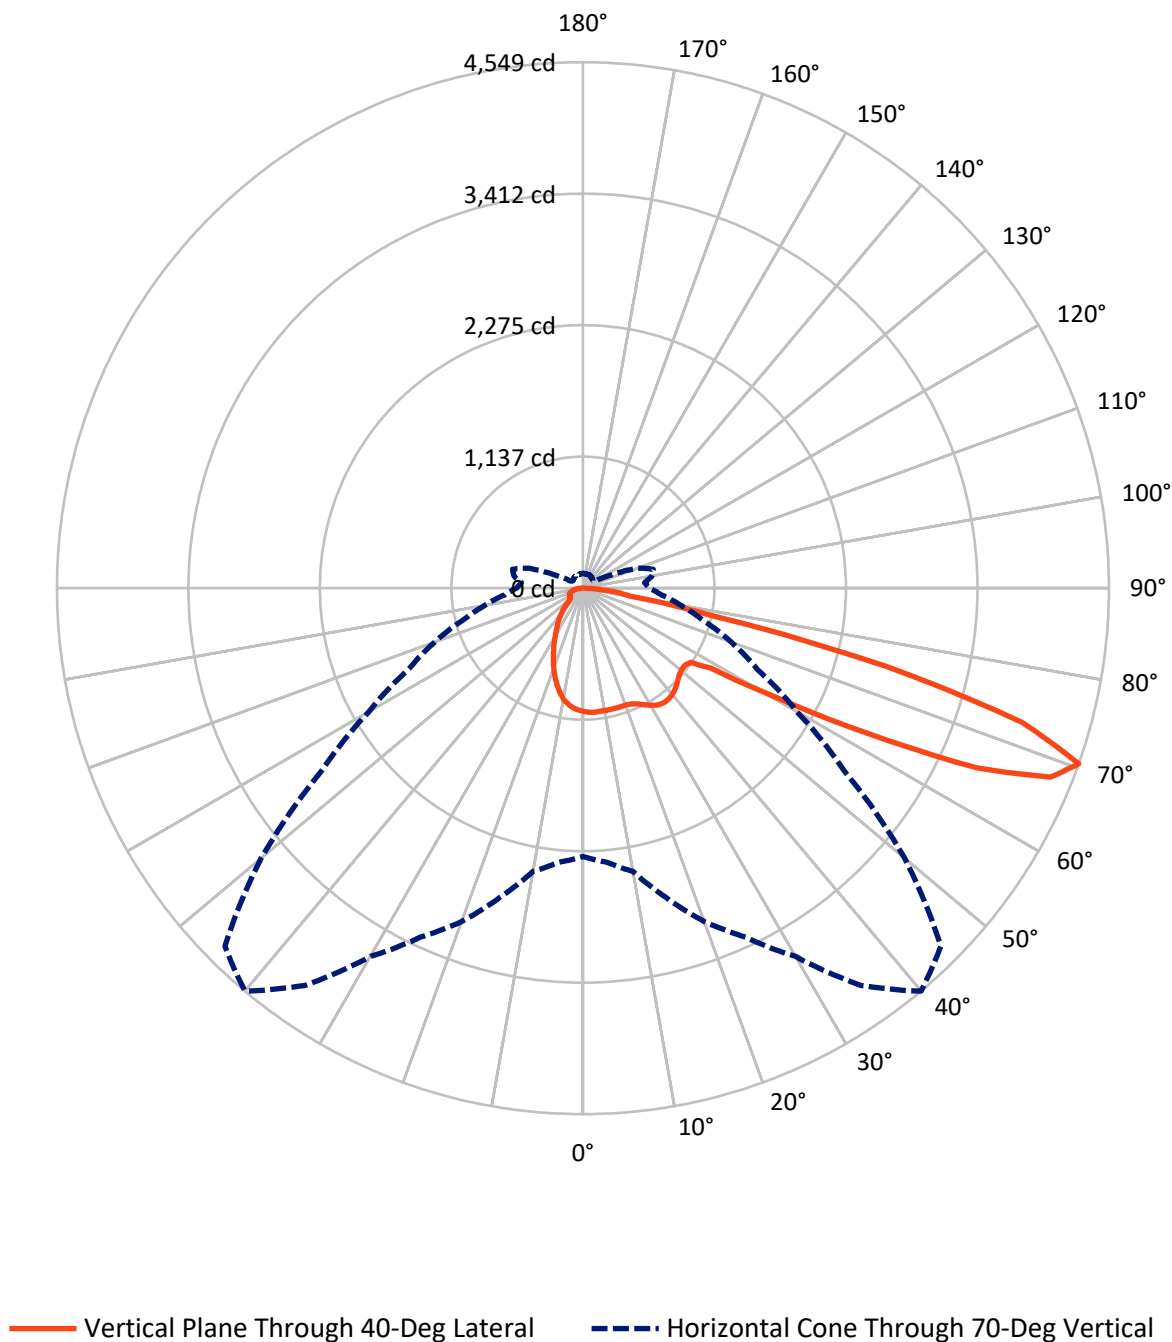

REPORT NUMBER: P152607

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-7060

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1038.9	0.0	1038.9
	% Fixture	20.8	0.0	20.8
Street Side	Lumens	3965.8	0.0	3965.8
	% Fixture	79.2	0.0	79.2
Total	Lumens	5004.7	0.0	5004.7
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.8	2.0
10°-20°	273.1	5.5
20°-30°	404.3	8.1
30°-40°	510.9	10.2
40°-50°	577.8	11.5
50°-60°	822.3	16.4
60°-70°	1531.4	30.6
70°-80°	701.8	14.0
80°-90°	83.3	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	5004.7	100.0
0°-180°	5004.7	100.0

Coefficient of Utilization



REPORT NUMBER: P152607


CATALOG NUMBER: AVS-F02-LED-E-U-SL4-7060

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	455.7	9.1			
FM	(30°-60°)	1466.2	29.3			
FH	(60°-80°)	1982.1	39.6			G2/5000
FVH	(80°-90°)	61.8	1.2			G1/100
BL	(0°-30°)	321.5	6.4	B1/500		
BM	(30°-60°)	444.8	8.9	B1/1000		
BH	(60°-80°)	251.2	5.0	B1/500		G1/500
BVH	(80°-90°)	21.5	0.4			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G2

Type IV Short

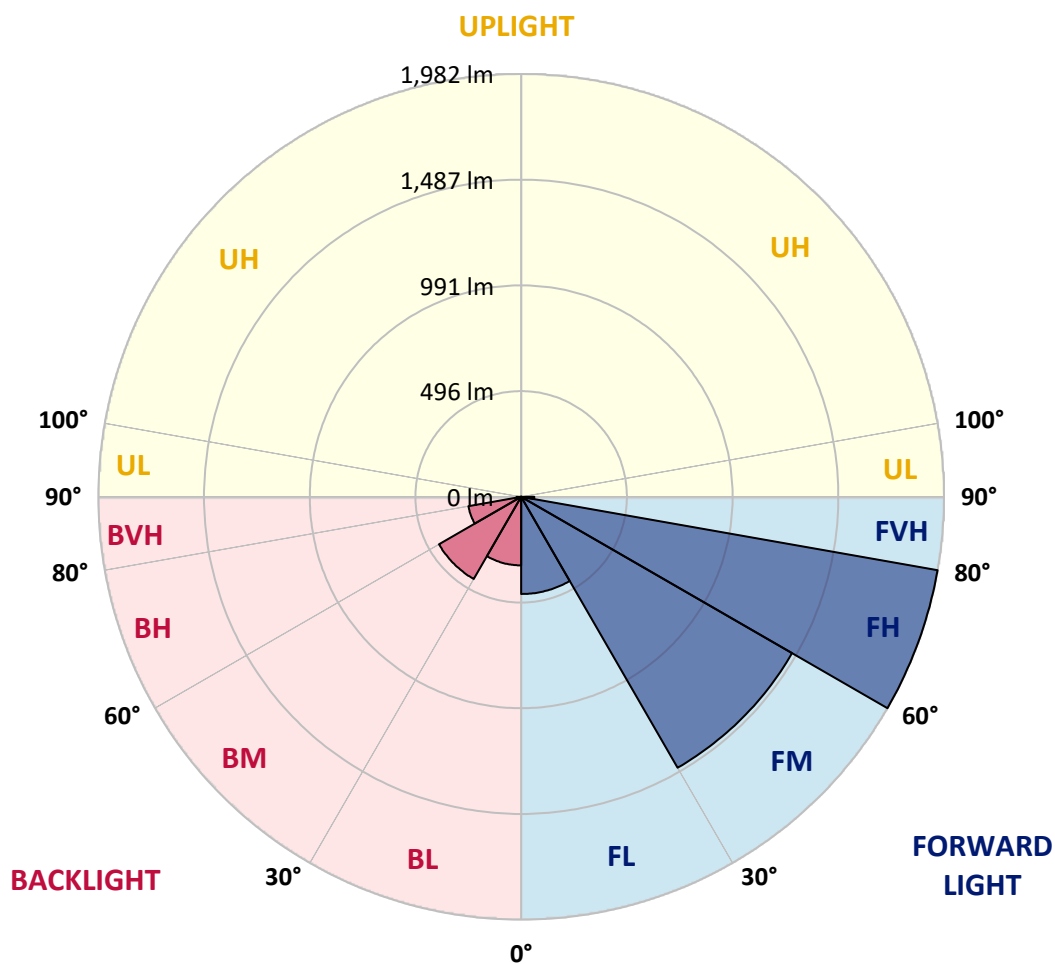



REPORT NUMBER: P152607

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-7060

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9
2.5°	1084.2	1087.0	1083.7	1083.1	1083.1	1082.6	1079.2	1078.7	1074.1	1074.6	1075.8
5°	1092.1	1093.3	1091.0	1090.5	1089.3	1087.0	1084.2	1080.8	1077.5	1074.1	1071.3
7.5°	1100.1	1099.0	1097.2	1097.2	1095.5	1092.1	1086.5	1082.0	1074.6	1070.7	1065.6
10°	1111.4	1109.6	1107.5	1106.3	1103.4	1098.3	1090.5	1084.2	1075.2	1067.4	1058.9
12.5°	1122.1	1121.6	1118.1	1116.5	1111.9	1106.8	1097.2	1087.7	1075.8	1063.3	1052.0
15°	1141.2	1139.1	1135.6	1132.2	1124.9	1118.1	1103.4	1092.1	1075.2	1058.9	1041.3
17.5°	1174.6	1170.7	1167.3	1159.9	1150.9	1139.1	1117.6	1098.3	1075.2	1051.5	1031.7
20°	1235.6	1227.2	1222.6	1213.1	1197.2	1175.8	1142.4	1111.4	1076.9	1046.4	1019.9
22.5°	1304.5	1298.9	1292.6	1286.4	1261.6	1230.6	1185.4	1139.1	1087.0	1044.1	1010.3
25°	1381.9	1374.5	1371.1	1360.4	1337.2	1301.7	1240.1	1175.8	1110.3	1053.2	1010.3
27.5°	1450.8	1448.5	1448.0	1435.5	1413.5	1371.7	1298.9	1221.5	1141.9	1071.8	1018.8
30°	1513.5	1511.2	1510.1	1503.3	1477.8	1428.2	1349.1	1262.2	1176.3	1097.8	1034.6
32.5°	1580.1	1572.7	1569.3	1556.4	1527.6	1469.4	1379.1	1288.7	1203.4	1123.2	1052.0
35°	1634.3	1628.1	1621.3	1602.7	1562.0	1493.2	1392.0	1297.7	1214.1	1137.3	1061.1
37.5°	1673.8	1667.6	1658.0	1634.3	1584.0	1501.0	1391.5	1294.9	1210.2	1135.1	1062.8
40°	1691.3	1685.1	1674.9	1645.0	1588.0	1496.5	1380.7	1281.9	1198.3	1123.2	1056.1
42.5°	1684.6	1680.0	1667.0	1638.2	1575.5	1476.2	1359.3	1257.6	1175.8	1104.0	1040.7
45°	1658.5	1655.2	1642.8	1612.2	1547.4	1443.4	1327.7	1227.2	1148.6	1080.3	1020.4
47.5°	1619.6	1618.4	1606.0	1576.2	1511.7	1410.7	1294.9	1197.2	1121.6	1057.2	1003.5
50°	1576.7	1571.1	1564.9	1537.2	1478.4	1382.4	1271.2	1178.5	1106.3	1048.7	996.2
52.5°	1549.5	1547.9	1542.3	1517.4	1460.9	1366.0	1260.4	1171.8	1105.2	1046.9	992.2
55°	1790.2	1794.1	1742.2	1634.3	1539.4	1411.2	1292.6	1206.2	1132.8	1074.1	1034.0
57.5°	2648.0	2630.5	2541.2	2327.2	2085.5	1766.4	1536.6	1397.1	1306.2	1316.4	1336.7
60°	3085.1	3081.7	3065.3	2982.3	2821.3	2578.5	2309.1	2000.2	1902.0	1912.7	1920.6
62.5°	3280.4	3285.5	3297.9	3266.8	3224.6	3154.0	3019.6	2895.3	2763.7	2714.6	2583.0
65°	3370.8	3379.8	3408.1	3425.6	3442.0	3454.4	3507.5	3653.2	3749.1	3569.5	3151.7
67.5°	3183.8	3227.4	3320.5	3411.5	3492.7	3608.5	3788.1	4126.4	4361.9	4141.0	3535.1
70°	2321.0	2380.3	2487.0	2768.3	3068.7	3331.3	3679.2	4194.2	4549.3	4378.9	3630.1
72.5°	1455.2	1471.6	1519.1	1622.4	1845.5	2182.6	2790.9	3563.3	3973.4	3837.2	3068.1
75°	923.3	928.9	927.3	951.0	988.8	1062.3	1302.8	2104.7	2722.0	2509.6	1709.9
77.5°	550.1	558.5	561.9	569.2	587.4	613.3	633.1	716.1	1141.2	1108.0	620.6
80°	460.8	467.6	462.0	460.2	448.9	441.0	450.7	441.0	409.4	394.2	363.1
82.5°	243.9	243.4	241.7	258.0	291.4	317.4	337.1	332.6	301.0	256.4	217.4
85°	133.9	138.3	138.3	144.0	139.0	139.5	144.0	151.9	140.6	117.5	96.0
87.5°	11.3	17.5	14.1	17.5	23.7	16.9	16.4	16.4	14.1	10.2	9.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152607

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-7060

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9
2.5°	1073.0	1071.8	1069.5	1067.9	1067.9	1065.1	1063.3	1062.3	1061.7	1059.4	1059.4
5°	1069.5	1065.6	1061.7	1058.9	1057.2	1054.3	1049.8	1047.6	1044.8	1042.5	1041.3
7.5°	1062.3	1054.9	1048.7	1044.1	1038.5	1034.0	1028.4	1023.3	1018.1	1016.0	1014.8
10°	1051.0	1041.3	1031.7	1023.3	1015.3	1007.5	1000.1	992.7	986.5	982.1	977.5
12.5°	1040.2	1025.5	1013.1	1000.7	988.3	978.7	968.5	957.7	948.7	940.2	938.0
15°	1025.5	1008.6	992.7	977.5	962.3	946.4	934.1	922.2	907.5	897.9	890.6
17.5°	1012.0	991.6	972.4	954.4	935.8	919.4	900.7	884.9	870.3	855.5	844.8
20°	997.3	975.2	954.9	934.6	914.3	893.4	871.9	851.6	833.5	816.1	798.5
22.5°	984.4	961.8	942.0	919.9	897.3	873.6	848.8	823.3	802.5	779.9	759.6
25°	976.4	951.5	931.2	909.7	884.9	859.0	830.7	800.7	775.3	749.4	725.1
27.5°	976.4	944.2	923.3	901.9	876.5	848.8	817.7	785.0	756.2	727.4	697.4
30°	984.9	945.3	917.1	894.5	868.5	838.7	804.1	769.7	738.1	704.2	675.4
32.5°	992.7	947.6	912.5	883.7	853.9	824.5	789.4	752.7	717.7	685.6	655.0
35°	997.8	947.6	904.1	867.4	833.5	804.8	770.3	733.6	698.0	666.3	638.1
37.5°	998.4	943.1	890.6	848.8	813.2	783.2	750.5	716.1	682.2	652.8	629.1
40°	992.7	934.1	877.0	829.0	791.7	761.2	731.3	700.2	669.7	645.5	625.2
42.5°	982.6	924.5	864.0	813.2	774.2	742.6	714.9	688.4	661.9	640.9	624.0
45°	967.4	911.5	852.1	803.6	765.2	731.9	704.8	682.7	660.1	642.7	625.7
47.5°	953.8	906.9	856.1	809.8	769.7	735.2	707.6	688.9	671.4	659.6	636.5
50°	951.0	904.7	857.8	814.9	774.2	739.2	714.9	705.3	700.2	693.0	657.3
52.5°	943.1	904.1	870.3	846.5	820.5	804.1	778.8	787.8	782.2	756.2	691.8
55°	1026.1	1037.4	1069.0	1114.2	1156.0	1165.6	1162.8	1152.0	1095.0	942.0	774.8
57.5°	1410.7	1474.5	1534.3	1560.8	1557.5	1527.6	1506.1	1462.6	1380.2	1193.8	938.5
60°	1944.9	1955.0	1923.4	1876.6	1797.5	1731.4	1660.8	1579.5	1459.8	1277.4	1039.1
62.5°	2436.8	2300.1	2159.5	2027.4	1907.0	1802.0	1703.7	1590.3	1434.4	1244.0	1026.1
65°	2784.0	2494.9	2273.0	2083.2	1913.3	1766.4	1643.9	1496.5	1320.8	1149.2	951.0
67.5°	2963.1	2519.8	2179.3	1914.9	1673.8	1470.6	1307.4	1163.8	1033.5	958.3	832.4
70°	2763.2	2138.5	1664.2	1365.5	1076.9	863.4	682.2	572.6	534.8	605.9	630.3
72.5°	2059.0	1392.0	989.9	765.8	586.7	467.6	358.5	281.8	229.3	240.5	312.3
75°	973.6	600.8	424.7	323.0	257.0	212.8	173.9	159.3	133.3	110.7	103.9
77.5°	379.0	276.2	228.2	167.2	118.5	95.4	81.3	78.4	80.2	77.9	76.8
80°	288.6	195.4	122.6	89.7	77.4	68.3	60.4	58.1	59.3	62.1	65.0
82.5°	160.9	100.5	74.5	65.0	58.1	49.7	45.2	41.8	42.4	45.7	51.9
85°	62.1	48.6	44.7	42.9	40.1	32.2	27.7	28.2	32.2	38.4	38.4
87.5°	6.7	6.7	9.0	6.7	6.7	6.7	6.2	7.4	7.9	10.2	11.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152607

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-7060

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9	1067.9
2.5°	1058.2	1058.2	1058.2	1057.2	1057.7	1055.4	1055.4	1053.8	1056.6	1054.9	1054.3
5°	1041.9	1041.3	1039.1	1039.1	1039.1	1039.1	1040.7	1036.3	1039.7	1039.7	1037.9
7.5°	1014.2	1014.2	1008.0	1011.4	1010.3	1012.0	1014.2	1012.0	1015.3	1017.6	1016.0
10°	975.9	975.9	970.8	974.7	973.1	977.0	980.9	978.7	980.9	984.4	985.4
12.5°	933.5	931.2	926.7	928.4	928.4	930.7	932.3	935.1	938.0	942.5	944.8
15°	884.4	880.9	875.3	875.3	871.9	873.1	876.5	877.6	883.2	889.4	896.8
17.5°	834.1	825.6	819.4	812.0	806.4	811.0	814.9	817.7	822.3	831.8	836.9
20°	786.6	769.7	757.8	748.3	742.1	744.9	749.9	753.4	757.3	759.6	761.2
22.5°	739.8	720.6	704.2	692.3	682.2	685.0	682.7	681.0	683.8	676.6	676.0
25°	699.2	676.6	654.5	640.4	628.0	624.0	612.1	609.3	601.5	595.2	590.7
27.5°	669.7	640.4	616.1	599.7	580.0	565.3	550.1	534.8	526.3	516.2	511.1
30°	646.6	615.5	586.7	559.1	533.1	510.5	490.2	470.4	456.9	442.2	432.5
32.5°	625.2	596.4	561.3	523.5	488.5	463.1	436.5	413.9	392.4	373.3	359.2
35°	610.5	578.2	533.7	487.4	447.8	417.9	389.6	357.5	331.5	306.6	291.4
37.5°	602.6	563.0	508.3	456.9	412.8	379.0	343.9	306.6	275.0	251.8	228.7
40°	596.4	547.8	485.7	429.7	383.4	342.8	302.1	258.0	223.1	198.8	180.7
42.5°	589.5	530.9	465.9	408.3	356.9	309.4	260.3	213.5	180.1	163.2	155.3
45°	582.2	516.2	447.3	388.0	330.9	273.4	216.9	173.4	153.6	148.0	148.0
47.5°	580.5	506.5	433.7	368.2	301.6	231.5	176.8	149.6	144.0	145.2	147.4
50°	587.4	503.7	421.9	345.1	262.6	187.5	149.6	140.6	141.8	145.2	148.5
52.5°	603.7	506.0	409.4	312.8	216.3	154.7	138.3	137.8	141.1	146.2	149.6
55°	631.4	506.0	385.7	264.9	172.8	139.0	134.4	136.7	141.1	145.7	148.5
57.5°	690.7	500.9	343.9	211.8	144.6	133.3	133.3	136.1	140.0	144.6	146.8
60°	761.2	494.1	285.2	163.7	130.5	128.7	132.7	136.1	139.5	143.4	145.7
62.5°	765.8	476.6	225.9	135.5	123.1	125.9	132.1	136.7	137.8	140.6	143.4
65°	703.6	415.6	179.6	121.5	119.7	124.2	130.5	133.9	134.4	135.5	138.3
67.5°	616.1	338.9	145.2	114.6	116.4	121.5	124.8	127.7	129.3	132.1	132.7
70°	506.0	272.2	124.2	107.9	109.5	115.2	118.0	120.8	124.2	127.7	125.9
72.5°	358.5	211.8	109.0	100.5	102.8	107.9	111.3	113.5	116.4	119.7	117.5
75°	152.4	148.0	94.3	90.9	94.3	97.7	101.0	104.5	107.3	109.0	109.0
77.5°	77.9	86.9	81.3	81.3	83.6	86.9	89.7	93.2	94.9	96.6	98.9
80°	66.1	67.2	68.3	70.6	72.8	76.3	79.1	81.9	82.5	83.0	84.1
82.5°	54.8	57.0	58.1	61.6	63.2	64.4	66.1	66.1	67.2	67.2	65.5
85°	39.5	42.4	44.0	44.7	44.0	44.7	45.2	46.3	49.1	49.1	46.8
87.5°	11.3	10.8	13.6	14.1	15.2	17.5	19.8	23.7	24.9	26.0	26.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P152607

CATALOG NUMBER: AVS-F02-LED-E-U-SL4-7060

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	1067.9	1067.9	1067.9	1067.9
2.5°	1053.8	1054.9	1052.6	1053.2
5°	1037.9	1040.2	1037.4	1040.7
7.5°	1017.6	1021.0	1020.4	1019.9
10°	988.3	992.7	992.7	994.5
12.5°	951.0	953.8	956.1	957.2
15°	900.7	905.8	908.6	908.6
17.5°	840.3	843.7	845.4	843.1
20°	763.5	762.4	762.9	757.3
22.5°	674.8	676.6	671.4	672.5
25°	587.9	585.1	587.4	583.9
27.5°	503.7	504.2	498.0	500.9
30°	423.5	420.7	412.8	416.8
32.5°	346.2	338.9	330.4	325.3
35°	273.4	262.1	258.0	256.4
37.5°	214.6	202.2	198.2	193.7
40°	170.6	166.0	164.4	165.5
42.5°	153.1	153.1	154.2	154.7
45°	148.5	150.3	151.9	152.4
47.5°	149.1	150.8	153.1	153.6
50°	150.3	151.9	153.6	154.2
52.5°	150.8	150.8	151.9	152.4
55°	149.6	149.1	149.6	150.3
57.5°	147.4	146.2	146.8	148.5
60°	146.2	144.6	145.7	146.8
62.5°	143.4	142.9	144.0	144.6
65°	137.2	137.8	139.5	139.5
67.5°	131.6	132.1	132.7	133.3
70°	124.8	125.4	126.5	127.0
72.5°	116.9	119.2	120.8	123.1
75°	110.7	113.0	116.4	118.5
77.5°	100.0	101.7	105.6	108.4
80°	84.7	84.1	84.7	86.4
82.5°	65.0	65.0	64.4	63.8
85°	45.7	45.2	43.5	43.5
87.5°	24.9	24.2	23.7	22.6
90°	0.0	0.0	0.0	0.0

(END OF REPORT)