

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P150903

Luminaire Tested: **AVS-F03-LED-E-U-SL3-HSS-8030**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P150903
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33727)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: AVS-F03-LED-E-U-SL3-HSS-8030
Description: VISION SITE SMALL LED LUMINAIRE
(3) LIGHTBARS WITH AccuLED OPTICS - TYPE 3 W/ SPILL LIGHT CONTROL AND HOUSE SIDE SHIELD
Light Source: (21) 3000K CCT, 80 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3624 lumens
Efficiency: N/A
Efficacy: 46.3 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 1' x H: 0')
IES Classification: Type III - Short - Non-Cutoff
BUG Rating: B0 - U0 - G1

Input Watts (W): 78.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P150903

CATALOG NUMBER: AVS-F03-LED-E-U-SL3-HSS-8030

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

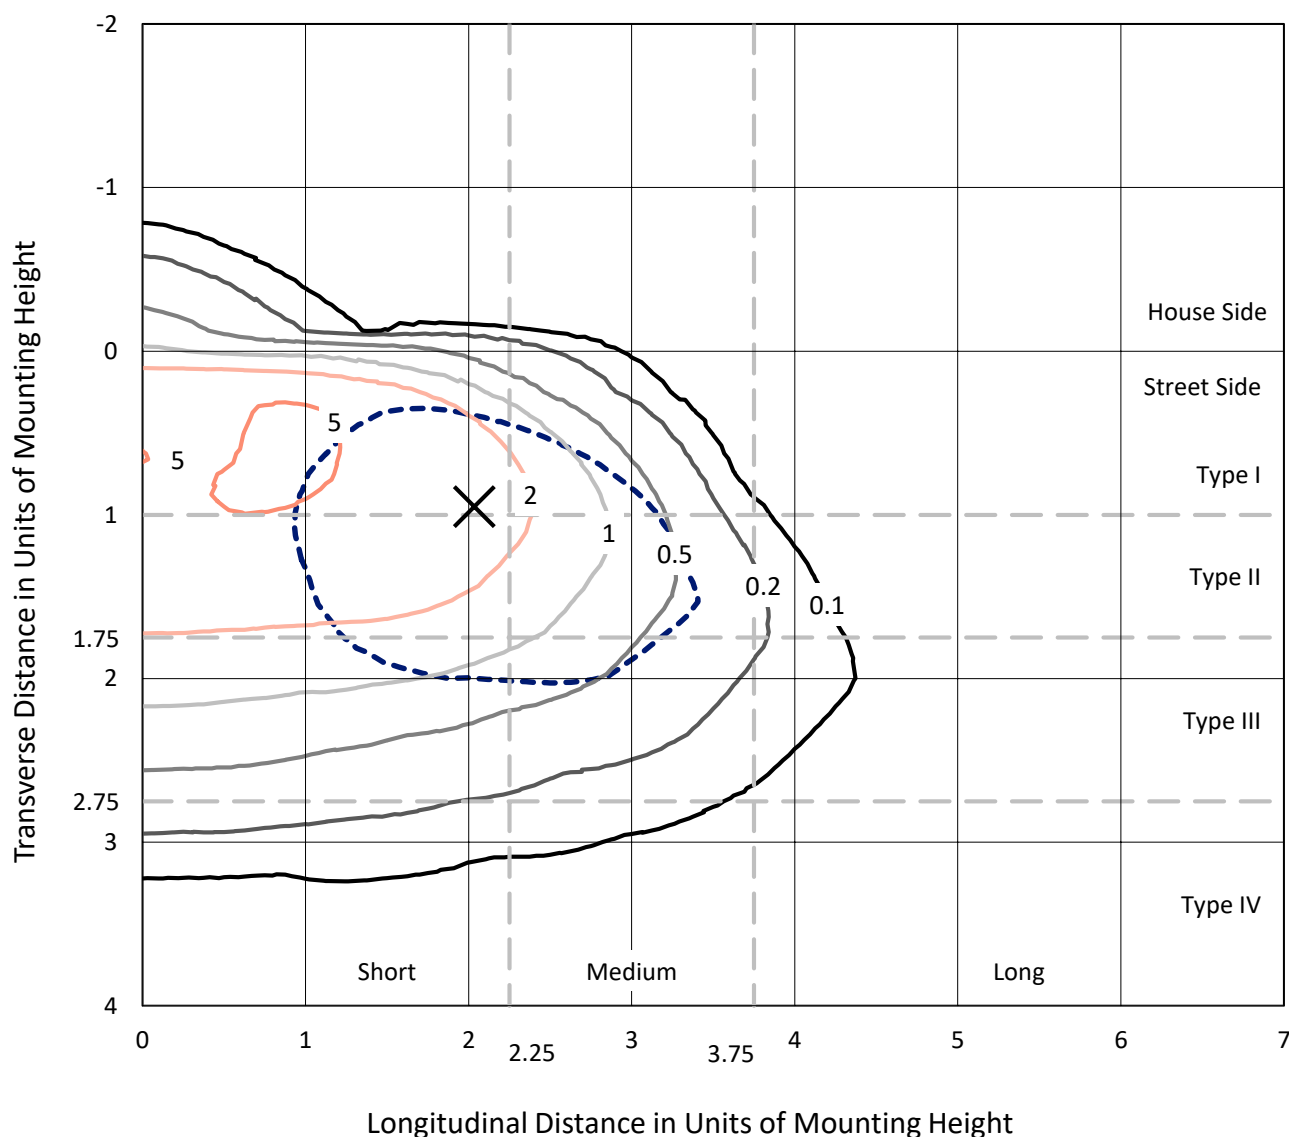


Based on 10 foot mounting height. Maximum calculated value = 6 fc
 Type III - Short - Non-Cutoff

REPORT NUMBER: P150903

CATALOG NUMBER: AVS-F03-LED-E-U-SL3-HSS-8030

Luminous Intensity Polar Plot

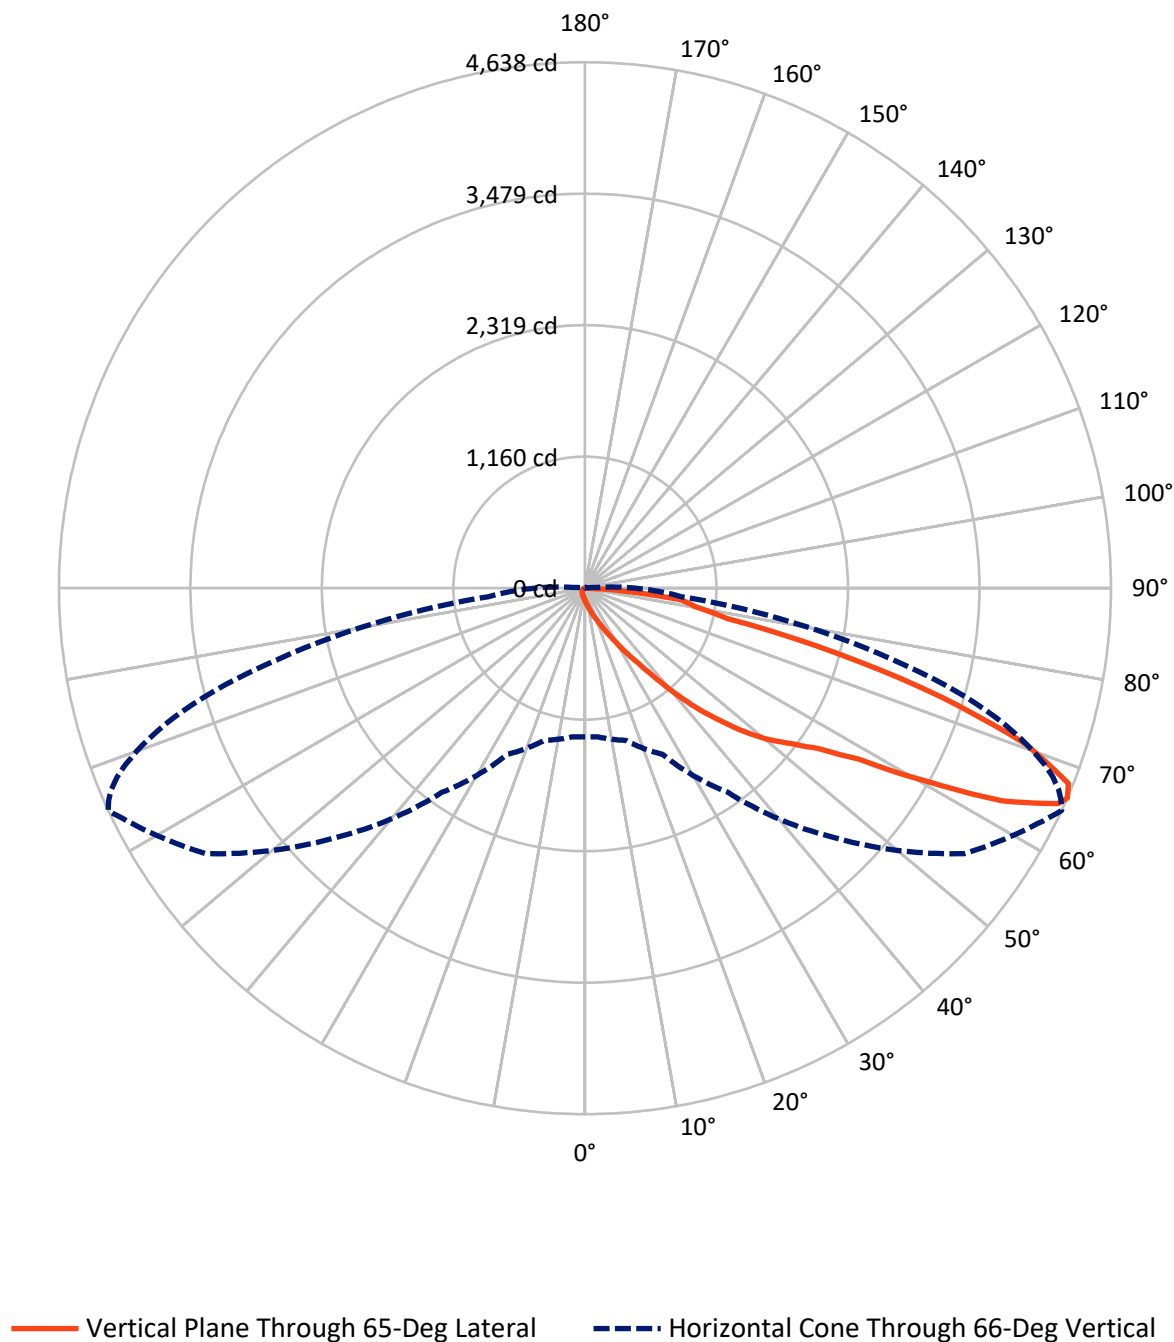

REPORT NUMBER: P150903

CATALOG NUMBER: AVS-F03-LED-E-U-SL3-HSS-8030


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	78.5	0.0	78.5
	% Fixture	2.2	0.0	2.2
Street Side	Lumens	3545.5	0.0	3545.5
	% Fixture	97.8	0.0	97.8
Total	Lumens	3624.0	0.0	3624.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.2	0.3
10°-20°	51.9	1.4
20°-30°	112.0	3.1
30°-40°	239.2	6.6
40°-50°	528.9	14.6
50°-60°	896.3	24.7
60°-70°	1196.0	33.0
70°-80°	526.8	14.5
80°-90°	60.7	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	3624.0	100.0
0°-180°	3624.0	100.0

Coefficient of Utilization

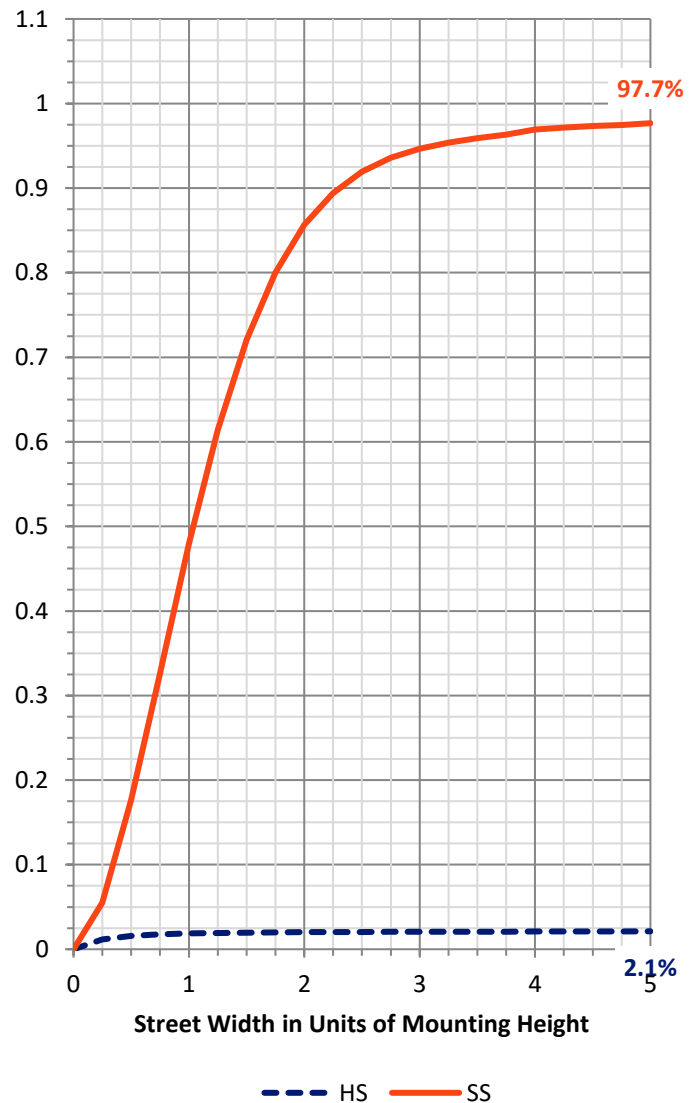

REPORT NUMBER: P150903


CATALOG NUMBER: AVS-F03-LED-E-U-SL3-HSS-8030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	151.4	4.2			
FM	(30°-60°)	1629.8	45.0			
FH	(60°-80°)	1706.0	47.1			G1/1800
FVH	(80°-90°)	58.3	1.6			G1/100
BL	(0°-30°)	24.8	0.7	B0/110		
BM	(30°-60°)	34.5	1.0	B0/220		
BH	(60°-80°)	16.8	0.5	B0/110		G0/110
BVH	(80°-90°)	2.4	0.1			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type III Short

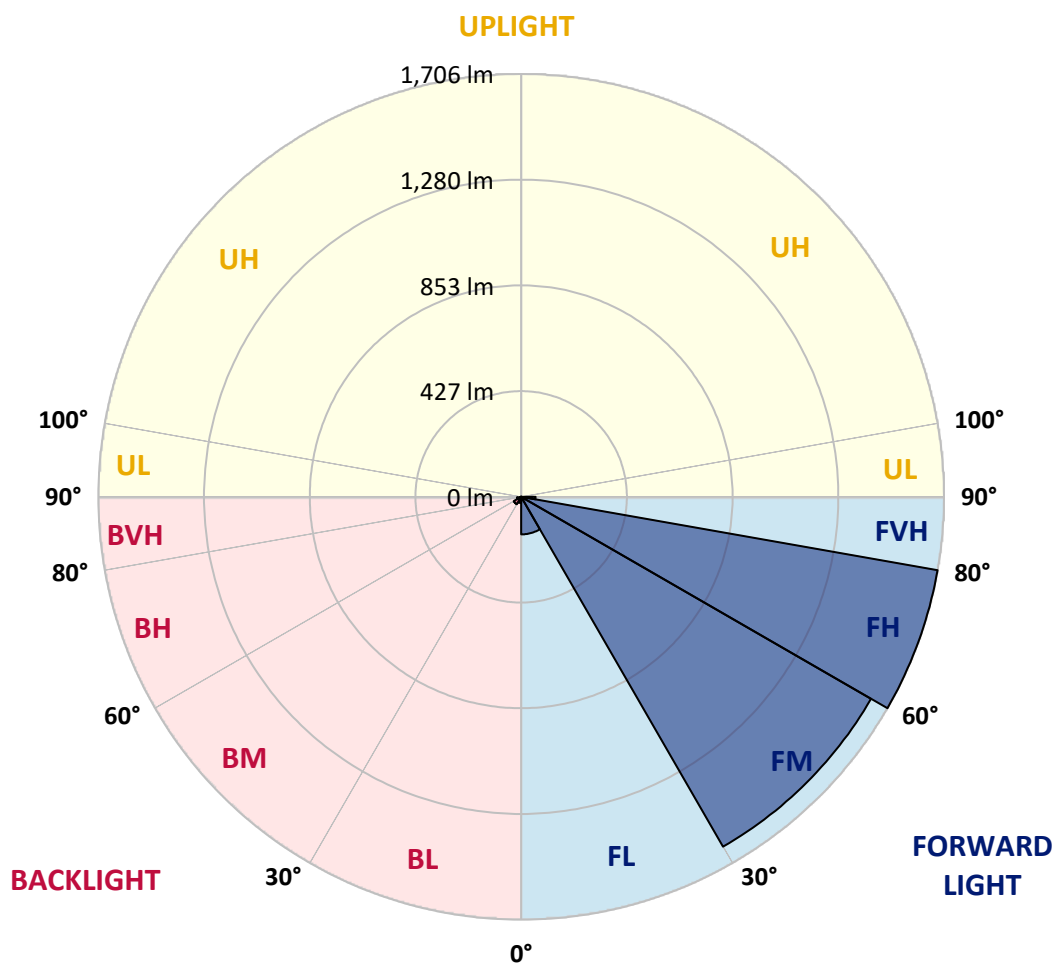

REPORT NUMBER: P150903

CATALOG NUMBER: AVS-F03-LED-E-U-SL3-HSS-8030

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	66°	67°	68°
0°	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4
2.5°	137.9	137.3	134.5	134.5	130.3	127.5	124.0	120.5	120.5	119.8	119.2
5°	182.6	178.3	177.6	170.1	163.7	154.7	146.3	135.1	133.8	132.3	131.7
7.5°	232.0	231.3	225.1	216.0	203.4	186.7	170.1	151.9	149.1	147.7	144.9
10°	296.1	292.6	284.2	268.9	250.2	227.9	200.6	172.1	168.6	165.8	164.5
12.5°	357.4	351.2	346.3	326.7	303.1	270.4	237.6	196.5	193.7	190.3	184.7
15°	414.5	409.0	400.6	383.9	357.4	316.3	278.0	227.9	220.8	216.0	211.8
17.5°	459.2	455.6	445.9	427.2	398.5	362.3	316.3	259.9	254.3	248.1	240.4
20°	501.7	496.8	481.5	455.6	425.0	397.1	361.6	301.7	294.0	286.3	278.0
22.5°	542.1	537.2	512.1	469.6	436.9	425.0	412.4	349.0	337.2	331.0	322.6
25°	598.4	588.1	549.0	481.5	437.5	446.6	468.2	410.4	399.3	390.2	376.9
27.5°	674.4	660.5	599.2	498.9	440.3	470.3	532.3	485.0	473.1	462.6	448.0
30°	760.1	751.1	677.9	540.6	460.5	505.2	604.0	579.7	565.7	553.2	535.8
32.5°	846.5	834.0	761.6	620.1	514.9	572.7	694.0	689.7	671.6	659.8	641.0
35°	922.5	916.2	862.6	750.4	638.9	691.2	813.8	818.7	802.6	790.1	769.2
37.5°	974.0	974.0	963.6	890.5	836.1	875.1	990.1	990.8	974.7	946.2	935.8
40°	1000.5	1008.2	1045.8	1059.7	1057.0	1107.2	1221.3	1208.8	1195.6	1180.9	1146.1
42.5°	1054.8	1061.9	1142.0	1238.1	1300.8	1367.0	1445.7	1441.6	1425.5	1399.1	1367.0
45°	1146.8	1155.9	1251.3	1403.9	1532.8	1626.8	1677.0	1657.5	1641.6	1616.5	1599.7
47.5°	1263.8	1281.3	1389.3	1578.1	1733.5	1888.8	1941.1	1889.5	1875.6	1856.1	1828.9
50°	1388.6	1405.3	1520.3	1736.3	1911.8	2097.2	2184.2	2097.2	2077.0	2070.7	2040.0
52.5°	1496.6	1510.6	1621.3	1858.2	2048.4	2265.8	2392.5	2277.6	2263.0	2242.1	2219.8
55°	1560.7	1571.8	1675.6	1916.7	2141.0	2417.7	2594.0	2493.0	2471.3	2463.0	2430.9
57.5°	1582.3	1593.5	1686.8	1924.4	2191.2	2556.4	2838.5	2842.0	2816.2	2786.2	2776.5
60°	1582.3	1594.8	1673.6	1905.6	2240.0	2704.0	3164.6	3455.1	3399.4	3393.8	3358.2
62.5°	1516.8	1528.6	1608.1	1847.8	2305.5	2903.3	3618.9	4131.6	4115.6	4079.4	4020.8
65°	1374.6	1381.7	1459.7	1700.0	2280.4	3086.5	4012.5	4581.8	4556.0	4484.9	4409.6
66°	1310.6	1316.2	1389.3	1615.8	2198.2	3111.6	4082.2	4638.1	4595.6	4535.8	4450.8
67.5°	1217.9	1227.7	1279.2	1459.0	2001.0	3024.6	4038.2	4598.4	4561.6	4489.0	4404.0
70°	813.1	806.1	988.0	1119.7	1524.5	2464.4	3623.0	4128.8	4129.5	4095.4	4061.2
72.5°	386.0	390.2	443.1	689.1	997.7	1646.4	2883.8	3295.5	3342.9	3281.7	3239.2
75°	277.3	283.5	315.6	421.6	595.0	988.0	1869.3	2304.8	2306.2	2197.5	2100.6
77.5°	80.8	84.4	118.4	259.9	445.9	666.7	1073.7	1281.3	1251.3	1173.3	1100.1
80°	33.5	33.5	34.8	82.9	179.1	452.8	751.1	986.5	983.1	953.2	909.9
82.5°	12.5	13.3	16.7	34.1	42.5	111.5	500.9	856.3	854.2	811.7	781.0
85°	1.3	1.3	4.1	14.6	16.1	20.9	100.3	377.6	375.5	377.6	331.0
87.5°	0.0	0.0	0.7	1.3	2.1	2.8	4.1	14.6	16.1	15.3	13.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150903

CATALOG NUMBER: AVS-F03-LED-E-U-SL3-HSS-8030

CANDELA DISTRIBUTION (continued):

	69°	70°	71°	72°	73°	74°	75°	76°	77°	78°	79°
0°	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4
2.5°	119.2	117.7	117.7	117.1	117.1	117.1	116.4	115.6	115.6	114.9	114.3
5°	130.3	128.9	128.2	126.8	126.1	125.4	124.0	123.3	122.0	121.2	120.5
7.5°	143.5	140.7	140.0	137.9	135.9	134.5	133.1	131.0	129.6	126.8	126.1
10°	160.2	156.8	154.0	151.2	149.1	145.6	143.5	140.7	137.9	135.9	133.8
12.5°	181.9	177.0	172.7	170.1	165.1	160.9	156.8	154.7	149.1	146.3	142.8
15°	205.5	200.0	195.1	189.5	186.0	179.1	173.5	167.3	164.5	159.6	154.0
17.5°	236.2	227.2	219.5	213.9	206.9	200.0	193.7	187.5	179.1	173.5	166.5
20°	268.9	261.2	250.8	241.0	232.7	224.4	215.3	206.9	199.3	190.3	181.9
22.5°	310.8	299.6	287.0	277.3	266.1	257.1	244.6	233.4	220.8	209.0	199.3
25°	363.7	349.0	337.2	323.3	310.1	296.1	280.8	266.8	250.8	239.7	223.0
27.5°	429.2	415.2	399.3	381.1	367.9	346.9	326.7	309.3	290.6	273.2	254.3
30°	512.7	492.6	475.9	458.4	432.0	411.8	388.1	364.4	338.7	321.2	292.6
32.5°	613.2	591.5	566.4	541.3	517.0	488.4	459.2	429.8	401.3	369.2	340.0
35°	735.8	709.9	681.5	654.2	616.6	585.9	549.0	508.6	476.6	439.7	402.7
37.5°	898.1	855.5	830.5	802.0	751.1	709.3	668.2	627.8	571.3	532.3	480.0
40°	1101.6	1076.5	1035.3	989.3	943.4	888.3	832.6	779.0	713.5	659.1	598.4
42.5°	1340.5	1303.6	1261.8	1195.6	1148.9	1084.1	1020.7	949.6	869.5	799.9	728.8
45°	1564.9	1520.9	1488.9	1422.7	1374.0	1297.3	1220.7	1145.4	1052.7	962.9	880.7
47.5°	1807.4	1771.1	1718.1	1664.5	1615.0	1528.6	1445.7	1354.4	1256.9	1150.3	1043.7
50°	2020.5	1991.9	1955.8	1891.0	1835.9	1763.4	1665.9	1566.2	1442.9	1337.0	1215.9
52.5°	2201.7	2179.4	2128.5	2082.6	2033.1	1964.8	1877.7	1782.3	1649.2	1532.8	1394.8
55°	2415.5	2399.6	2354.9	2326.4	2282.5	2217.0	2135.5	2047.0	1906.2	1779.5	1623.4
57.5°	2766.0	2753.5	2714.5	2702.6	2659.5	2602.3	2502.0	2407.3	2242.8	2085.3	1906.9
60°	3346.4	3321.3	3264.2	3234.9	3143.6	3067.0	2936.8	2806.4	2607.9	2407.3	2192.6
62.5°	3967.9	3897.5	3788.8	3695.4	3565.9	3432.8	3258.7	3059.4	2826.6	2588.4	2341.8
65°	4303.0	4183.2	4045.9	3897.5	3729.6	3533.9	3314.4	3075.4	2825.3	2573.8	2313.2
66°	4341.3	4206.2	4060.6	3895.4	3708.7	3500.4	3277.4	3026.6	2766.7	2521.5	2260.9
67.5°	4293.3	4151.8	3997.8	3814.6	3612.5	3396.6	3162.5	2901.9	2651.8	2403.0	2149.4
70°	3956.8	3816.1	3678.8	3485.8	3270.5	3053.1	2831.5	2540.3	2303.4	2074.9	1849.1
72.5°	3159.7	3064.2	2928.4	2763.2	2553.6	2298.5	2113.9	1853.4	1647.8	1426.2	1251.3
75°	1974.5	1840.1	1672.1	1461.8	1301.5	1094.6	986.5	788.7	671.6	569.2	470.3
77.5°	1009.5	908.5	790.8	672.3	558.8	445.9	344.9	243.8	164.5	114.3	85.0
80°	834.0	744.8	647.3	539.3	439.0	340.7	245.3	167.3	106.6	69.6	54.3
82.5°	689.1	613.8	526.7	426.4	339.3	267.6	186.0	121.2	75.2	48.8	38.3
85°	293.4	266.1	205.5	163.0	122.6	90.6	63.4	42.5	29.9	24.4	22.3
87.5°	12.5	13.9	13.3	10.5	7.7	7.7	6.9	5.6	5.6	5.6	5.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150903

CATALOG NUMBER: AVS-F03-LED-E-U-SL3-HSS-8030

CANDELA DISTRIBUTION (continued):

	80°	81°	82°	83°	84°	85°	95°	105°	115°	125°	135°
0°	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4
2.5°	114.3	113.6	112.8	112.8	112.1	111.5	107.3	103.8	99.6	96.9	94.1
5°	119.2	118.4	117.1	116.4	114.9	114.3	105.2	97.5	91.3	86.4	82.9
7.5°	124.0	123.3	121.2	119.2	118.4	117.1	102.4	92.6	84.4	78.8	75.2
10°	130.3	128.2	126.1	123.3	121.2	119.2	99.6	87.0	78.0	73.2	69.6
12.5°	139.4	135.9	132.3	128.9	126.1	122.6	98.2	82.2	73.2	67.6	64.1
15°	149.8	144.9	140.7	136.6	131.7	128.2	95.4	78.0	69.0	63.4	59.2
17.5°	159.6	154.0	147.7	141.5	136.6	131.7	92.6	73.9	64.8	59.2	55.0
20°	173.5	165.1	157.5	149.8	142.8	136.6	88.5	69.6	61.3	55.0	50.9
22.5°	188.8	179.1	169.3	158.9	149.8	141.5	85.0	66.2	57.8	51.6	46.6
25°	208.3	196.5	183.2	170.1	159.6	148.4	81.6	62.7	54.3	48.1	43.2
27.5°	235.5	218.8	204.1	187.5	171.4	158.9	78.8	59.9	50.9	44.6	39.7
30°	272.4	248.1	225.1	206.9	188.1	170.1	76.0	56.5	48.1	41.1	35.5
32.5°	313.6	285.0	258.4	231.3	207.7	186.7	73.2	53.7	44.6	37.6	32.7
35°	364.4	328.2	292.6	261.2	232.7	204.9	70.4	50.9	41.8	34.1	29.2
37.5°	437.5	392.2	345.6	305.2	268.3	231.3	68.3	48.1	38.3	30.7	25.8
40°	537.9	479.4	422.2	367.2	319.1	273.2	65.5	45.3	35.5	27.9	23.0
42.5°	646.5	575.5	500.2	438.2	372.0	314.2	62.7	42.5	32.7	25.1	20.2
45°	781.8	693.3	602.0	517.7	436.9	362.3	59.9	39.7	29.2	22.3	17.4
47.5°	929.4	816.6	713.5	607.6	511.4	422.2	56.5	37.6	26.4	19.5	15.3
50°	1081.3	962.2	831.9	711.4	597.1	482.2	53.0	34.1	23.7	17.4	12.5
52.5°	1245.1	1104.4	971.3	821.5	688.4	560.8	49.4	31.4	21.6	15.3	10.5
55°	1453.4	1296.0	1139.9	971.9	811.7	652.1	46.0	27.9	18.9	13.3	8.4
57.5°	1715.3	1528.6	1337.0	1147.6	953.2	772.0	43.2	24.4	16.1	11.2	6.9
60°	1962.7	1744.7	1512.6	1294.5	1075.0	863.9	39.1	21.6	13.9	9.0	6.9
62.5°	2090.9	1842.2	1592.0	1351.7	1117.5	896.7	34.8	18.1	11.8	7.7	6.3
65°	2059.6	1805.9	1563.5	1321.0	1091.8	875.8	30.7	16.1	10.5	6.9	6.3
66°	2014.3	1763.4	1519.6	1288.9	1070.2	853.5	28.6	15.3	9.7	6.9	5.6
67.5°	1915.3	1672.8	1440.1	1225.6	1011.0	811.0	25.8	13.9	9.0	6.3	5.6
70°	1636.0	1415.8	1229.7	1038.9	863.9	683.5	20.9	11.8	7.7	5.6	5.6
72.5°	1082.7	933.0	808.9	696.1	581.8	451.5	17.4	9.7	6.3	5.6	4.9
75°	408.3	369.2	317.0	285.0	248.7	218.0	13.9	6.3	4.9	4.9	4.9
77.5°	72.4	66.8	59.2	54.3	50.2	46.0	11.2	4.1	4.1	4.9	4.9
80°	48.8	45.3	41.1	37.6	34.8	31.4	7.7	3.5	4.1	4.1	4.9
82.5°	34.8	32.7	30.7	27.9	25.8	23.0	4.9	3.5	4.1	4.1	4.1
85°	20.9	19.5	18.1	16.7	14.6	13.9	3.5	3.5	3.5	4.1	4.1
87.5°	5.6	4.9	5.6	5.6	4.1	4.9	2.8	2.8	2.8	3.5	3.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P150903

CATALOG NUMBER: AVS-F03-LED-E-U-SL3-HSS-8030

CANDELA DISTRIBUTION (continued):

	145°	155°	165°	175°	180°
0°	109.4	109.4	109.4	109.4	109.4
2.5°	92.6	92.6	91.3	93.4	93.4
5°	80.1	80.1	79.4	80.1	80.1
7.5°	73.2	72.4	72.4	72.4	73.2
10°	66.8	66.2	66.2	66.2	66.2
12.5°	61.3	60.6	59.9	60.6	60.6
15°	56.5	55.0	55.0	55.0	55.0
17.5°	52.2	50.9	50.2	50.2	50.2
20°	48.1	46.0	46.0	46.0	46.0
22.5°	43.9	41.8	41.8	41.8	41.8
25°	39.7	37.6	37.6	37.6	37.6
27.5°	36.3	34.1	34.1	34.1	34.1
30°	32.0	30.7	30.7	31.4	30.7
32.5°	29.2	27.2	27.2	27.9	27.9
35°	25.8	24.4	24.4	24.4	24.4
37.5°	22.3	20.9	20.9	20.9	20.9
40°	19.5	18.1	17.4	18.1	18.1
42.5°	16.7	15.3	14.6	14.6	14.6
45°	14.6	12.5	11.8	12.5	12.5
47.5°	11.8	10.5	10.5	11.2	11.2
50°	9.0	9.0	9.7	11.2	11.2
52.5°	8.4	8.4	9.7	11.2	11.2
55°	7.7	8.4	9.7	10.5	11.2
57.5°	6.9	8.4	9.7	10.5	10.5
60°	6.9	7.7	9.0	10.5	10.5
62.5°	6.3	6.9	8.4	9.7	9.7
65°	6.3	6.9	8.4	9.7	9.7
66°	6.3	6.9	8.4	9.7	9.7
67.5°	6.3	6.9	8.4	9.7	9.7
70°	6.3	6.9	8.4	9.0	9.0
72.5°	5.6	6.3	7.7	9.0	9.0
75°	5.6	6.3	7.7	9.0	9.0
77.5°	5.6	6.3	7.7	9.0	9.0
80°	5.6	6.3	7.7	8.4	9.0
82.5°	4.9	6.3	6.9	8.4	8.4
85°	4.9	5.6	6.9	7.7	8.4
87.5°	4.1	4.9	5.6	6.9	6.9
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)