

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P324004

Luminaire Tested: **GAN-SA0B-830-U-SL4-HSS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P324004
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1903-205-25)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GAN-SA0B-830-U-SL4-HSS
Description: GALLEON AREA AND ROADWAY LUMINAIRE
(10) 80 CRI, 3000K, 800mA LIGHTSQUARES WITH 16 LEDS EACH AND TYPE IV
SPILL LIGHT ELIMINATOR OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 36480 lumens
Efficiency: N/A
Efficacy: 87.1 lumens/watt
Luminous Opening: Rectangular (W 2.5' x L: 1' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B3 - U0 - G5


Input Watts (W): 419
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P324004
 CATALOG NUMBER: GAN-SA0B-830-U-SL4-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

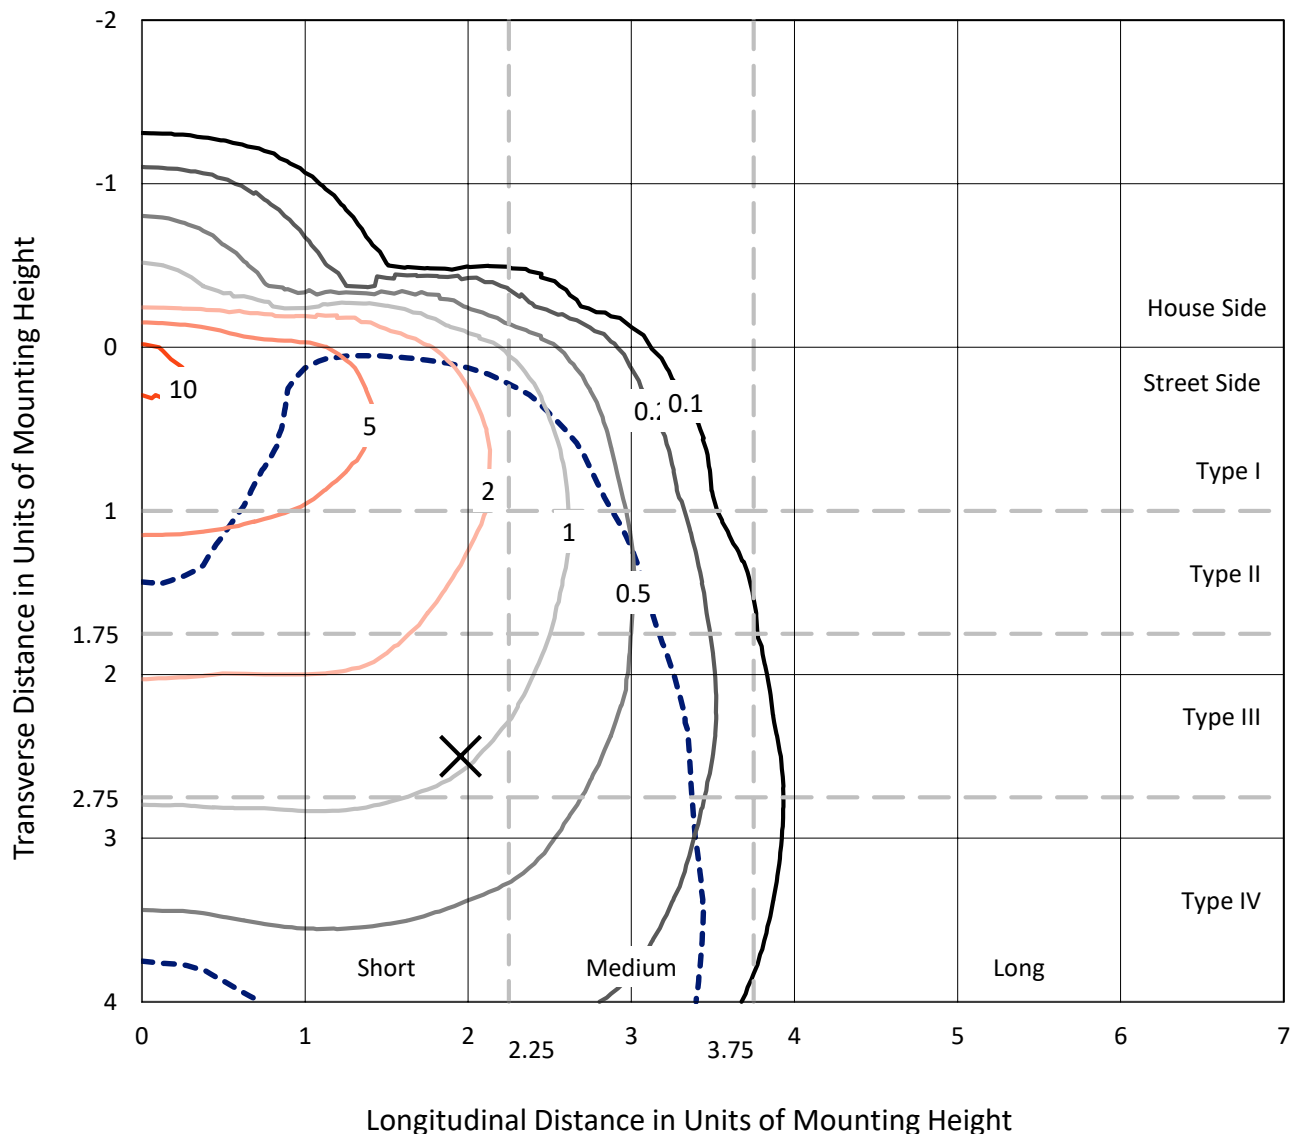

Based on 25 foot mounting height. Maximum calculated value = 11.3 fc
 Type IV - Short - N/A

REPORT NUMBER: P324004
CATALOG NUMBER: GAN-SA0B-830-U-SL4-HSS

Luminous Intensity Polar Plot

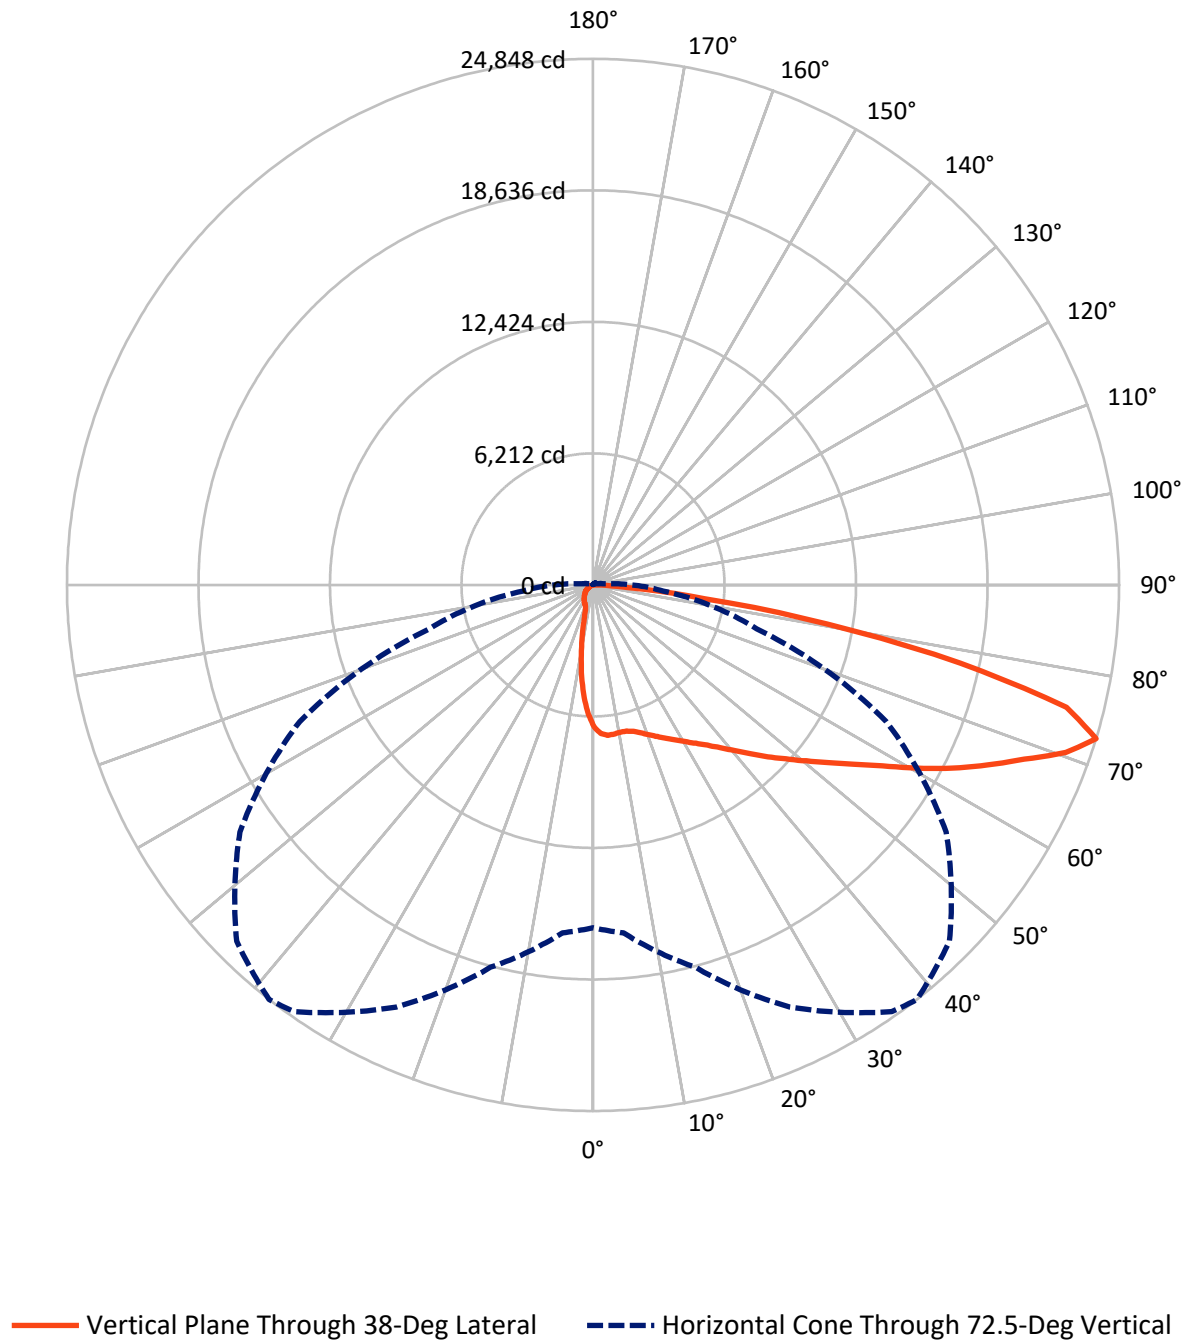

REPORT NUMBER: P324004

CATALOG NUMBER: GAN-SA0B-830-U-SL4-HSS

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3069.9	0.0	3069.9
	% Fixture	8.4	0.0	8.4
Street Side	Lumens	33410.1	0.0	33410.1
	% Fixture	91.6	0.0	91.6
Total	Lumens	36480.0	0.0	36480.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	571.7	1.6
10°-20°	1397.9	3.8
20°-30°	2223.4	6.1
30°-40°	3342.6	9.2
40°-50°	5099.4	14.0
50°-60°	7207.1	19.8
60°-70°	9040.2	24.8
70°-80°	6759.5	18.5
80°-90°	838.2	2.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	36480.0	100.0
0°-180°	36480.0	100.0

Coefficient of Utilization



REPORT NUMBER: P324004


CATALOG NUMBER: GAN-SA0B-830-U-SL4-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	3099.9	8.5			
FM	(30°-60°)	14090.2	38.6			
FH	(60°-80°)	15389.6	42.2			G5
FVH	(80°-90°)	830.3	2.3			G5
BL	(0°-30°)	1093.1	3.0	B3/2500		
BM	(30°-60°)	1558.9	4.3	B2/2500		
BH	(60°-80°)	410.1	1.1	B1/500		G1/500
BVH	(80°-90°)	7.8	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G5

Type IV Short

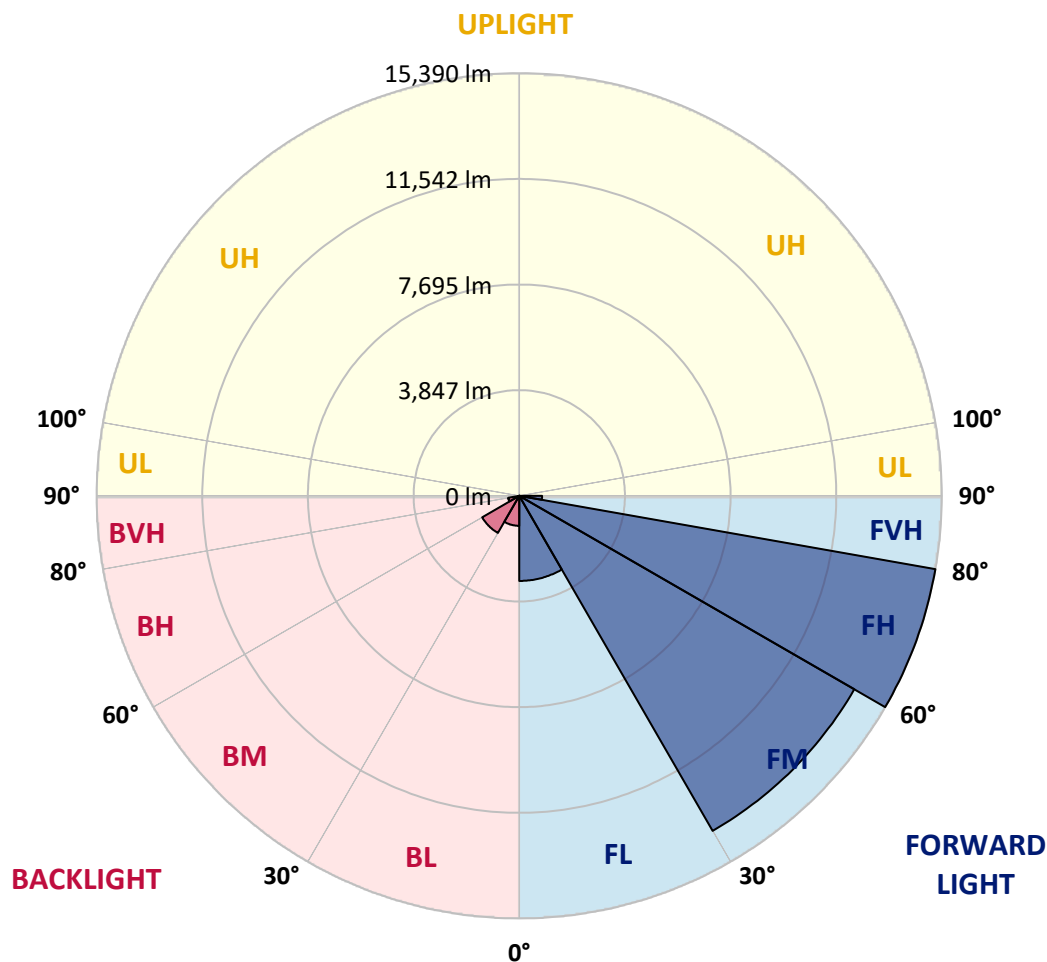



REPORT NUMBER: P324004

CATALOG NUMBER: GAN-SA0B-830-U-SL4-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	38°	45°	55°	65°	75°	85°
0°	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6
2.5°	7120.6	7122.2	7105.5	7078.2	7043.4	7025.2	6994.9	6946.4	6894.9	6802.5	6702.5
5°	7266.1	7266.1	7244.9	7208.5	7152.5	7135.8	7078.2	7001.0	6894.9	6744.9	6576.7
7.5°	7250.9	7254.0	7225.2	7187.3	7131.2	7116.1	7046.4	6960.0	6828.2	6646.4	6431.3
10°	7172.2	7179.7	7157.0	7138.8	7087.3	7070.6	7005.5	6919.1	6787.3	6593.4	6346.5
12.5°	7091.9	7099.4	7107.0	7123.7	7091.9	7085.8	7034.3	6961.6	6835.8	6634.3	6355.5
15°	7040.3	7055.5	7110.0	7175.2	7182.8	7176.7	7143.4	7075.2	6947.9	6738.9	6420.7
17.5°	7040.3	7064.6	7178.2	7302.4	7346.4	7350.9	7322.1	7226.7	7075.2	6851.0	6481.3
20°	7099.4	7132.8	7310.0	7485.8	7558.5	7558.5	7502.4	7369.1	7191.8	6952.5	6522.2
22.5°	7250.9	7294.9	7517.6	7720.6	7797.9	7781.2	7705.4	7511.5	7313.0	7067.6	6573.7
25°	7549.4	7582.7	7814.5	8019.1	8066.0	8028.1	7932.7	7684.2	7467.6	7223.7	6667.6
27.5°	7934.2	7938.8	8178.1	8350.8	8322.1	8296.3	8176.6	7900.9	7690.3	7446.4	6829.8
30°	8356.9	8356.9	8567.5	8699.3	8611.4	8590.2	8470.5	8163.0	7975.1	7749.4	7060.0
32.5°	8766.0	8784.1	8955.3	9038.7	8940.2	8919.0	8802.3	8494.8	8353.9	8211.5	7419.1
35°	9161.4	9175.0	9337.1	9382.6	9288.6	9294.7	9211.4	8950.8	8897.8	8879.6	7960.0
37.5°	9544.7	9547.7	9712.9	9741.6	9694.7	9746.2	9753.8	9523.5	9622.0	9768.9	8722.0
40°	9894.7	9897.7	10061.3	10135.5	10215.8	10282.5	10341.6	10218.9	10544.6	10885.5	9629.5
42.5°	10174.9	10206.8	10414.3	10555.2	10767.3	10894.6	11055.2	11049.1	11643.0	12155.1	10726.4
45°	10421.9	10476.4	10765.8	11012.8	11376.4	11579.4	11830.9	12027.8	12879.3	13568.6	11836.9
47.5°	10747.6	10799.1	11129.4	11533.9	12018.7	12285.4	12702.0	13127.7	14238.2	14956.4	12921.7
50°	11206.7	11183.9	11509.7	12089.9	12712.6	13062.6	13656.5	14294.3	15586.6	16165.4	13559.5
52.5°	11696.0	11686.9	11927.8	12694.4	13530.7	13939.8	14724.6	15500.3	16875.9	16998.6	13851.9
55°	12302.0	12236.9	12439.9	13383.8	14501.9	14941.2	15865.4	16694.1	17903.1	17468.3	13998.9
57.5°	12936.8	12829.3	13023.2	14151.9	15597.2	16116.9	17128.9	17857.7	18586.4	17789.5	13997.4
60°	13592.8	13465.6	13695.9	15112.4	16957.7	17559.2	18498.5	18644.0	19224.2	17951.6	13894.3
62.5°	14141.3	14065.5	14407.9	16139.6	18477.3	19068.2	19533.3	19359.1	19762.0	18077.3	13653.4
65°	14721.5	14726.1	15279.1	17338.0	20092.3	20490.8	20530.2	20286.2	20212.0	18051.6	12838.4
67.5°	15506.3	15579.1	16501.7	18965.1	21663.4	21971.0	21967.9	21290.7	20540.8	17027.4	11030.9
70°	16336.6	16507.8	17910.7	20827.1	23378.4	23690.5	23529.9	21930.1	19340.9	13768.6	7806.9
72.5°	16197.2	16494.1	18694.0	22001.3	24610.1	24848.0	23804.1	20359.0	15286.7	8002.4	3324.0
75°	12496.0	12839.9	17141.0	20837.7	23317.8	23104.2	20452.9	15842.7	8353.9	2233.2	748.4
77.5°	6601.0	6784.3	11323.3	15874.5	18181.9	17734.9	14407.9	8788.7	2546.8	553.0	336.3
80°	3457.3	3499.7	4934.5	9006.9	11221.8	11224.9	8538.7	3860.3	1049.9	283.3	225.7
82.5°	1851.4	1887.7	2607.4	4161.8	5879.8	5329.9	3269.4	2124.1	610.6	160.6	216.6
85°	445.4	453.0	1478.7	1901.4	2311.9	1651.4	971.1	1783.2	165.1	93.9	175.7
87.5°	171.2	174.2	548.4	822.7	589.3	381.8	454.5	665.1	21.2	36.4	27.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P324004

CATALOG NUMBER: GAN-SA0B-830-U-SL4-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6	6708.6
2.5°	6641.9	6602.5	6505.5	6382.8	6273.7	6195.0	6076.8	5999.5	5948.0	5946.5	5926.8
5°	6473.7	6393.4	6184.4	5935.9	5710.1	5507.1	5267.8	5078.4	4937.5	4914.8	4866.3
7.5°	6293.4	6161.6	5840.4	5452.6	5073.8	4689.0	4242.1	3964.8	3727.0	3613.3	3601.2
10°	6182.8	5998.0	5542.0	4981.4	4387.5	3761.8	3177.0	2772.5	2480.1	2396.8	2334.7
12.5°	6160.1	5916.2	5311.7	4539.0	3690.6	2863.4	2216.5	1786.2	1552.9	1478.7	1459.0
15°	6182.8	5878.3	5117.8	4101.2	2984.6	2031.7	1487.8	1237.8	1149.9	1128.7	1127.2
17.5°	6196.5	5832.9	4898.1	3614.9	2299.8	1451.4	1139.3	1066.6	1052.9	1051.4	1054.5
20°	6195.0	5763.2	4636.0	3072.5	1710.5	1140.8	1030.2	1015.1	1012.0	1013.6	1012.0
22.5°	6184.4	5681.4	4348.1	2513.4	1292.3	1019.6	983.3	974.2	972.6	972.6	972.6
25°	6204.0	5616.2	4031.5	1978.6	1065.1	963.6	940.8	933.3	931.7	931.7	928.7
27.5°	6275.3	5579.9	3684.6	1522.6	962.0	913.6	895.4	893.9	889.3	887.8	890.8
30°	6390.4	5579.9	3304.3	1184.8	899.9	862.1	848.4	845.4	843.9	842.4	843.9
32.5°	6593.4	5622.3	2889.2	984.8	840.8	804.5	795.4	799.9	795.4	795.4	795.4
35°	6960.0	5749.5	2454.3	859.0	778.7	748.4	739.3	745.4	742.4	742.4	740.8
37.5°	7494.9	5985.9	2016.5	783.3	724.2	692.4	680.2	689.3	686.3	686.3	684.8
40°	8146.3	6329.8	1599.9	725.7	671.2	637.8	627.2	631.8	624.2	624.2	627.2
42.5°	8950.8	6766.1	1236.3	669.6	618.1	586.3	580.3	575.7	562.1	554.5	556.0
45°	9844.7	7220.6	963.6	615.1	568.1	542.4	533.3	521.2	498.4	483.3	484.8
47.5°	10643.1	7570.6	783.3	562.1	522.7	503.0	489.4	466.6	433.3	415.1	416.6
50°	11062.7	7623.6	666.6	509.0	480.3	460.6	440.9	406.0	366.6	346.9	345.4
52.5°	11170.3	7375.2	580.3	460.6	437.8	415.1	389.4	342.4	298.5	277.3	274.2
55°	11209.7	6996.4	503.0	415.1	392.4	366.6	333.3	280.3	239.4	218.2	216.6
57.5°	11079.4	6431.3	442.4	374.2	346.9	315.1	274.2	224.2	184.8	168.2	168.2
60°	10790.0	5666.2	395.4	330.3	300.0	263.6	221.2	174.2	137.9	124.2	124.2
62.5°	10212.8	4675.4	351.5	284.8	256.0	218.2	178.8	131.8	97.0	89.4	90.9
65°	9123.5	3546.7	307.6	243.9	218.2	180.3	139.4	93.9	65.1	65.1	68.2
67.5°	7440.3	2463.4	262.1	207.6	187.9	147.0	106.1	65.1	45.5	51.5	57.6
70°	4925.4	1381.7	224.2	171.2	160.6	116.7	78.8	43.9	36.4	48.5	59.1
72.5°	1858.9	537.8	187.9	137.9	139.4	89.4	56.1	33.3	33.3	53.0	69.7
75°	518.1	263.6	134.8	101.5	109.1	65.1	40.9	28.8	31.8	60.6	81.8
77.5°	304.5	193.9	87.9	59.1	74.2	45.5	27.3	22.7	27.3	51.5	78.8
80°	245.4	103.0	51.5	30.3	40.9	25.8	18.2	13.6	7.6	19.7	40.9
82.5°	245.4	62.1	24.2	21.2	21.2	13.6	9.1	6.1	1.5	0.0	10.6
85°	165.1	25.8	15.2	13.6	10.6	4.5	3.0	1.5	0.0	0.0	0.0
87.5°	27.3	10.6	6.1	3.0	1.5	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)