

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P323698

Luminaire Tested: **GAN-SA4D-830-U-SL3-HSS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P323698
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1903-205-23)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GAN-SA4D-830-U-SL3-HSS
Description: GALLEON AREA AND ROADWAY LUMINAIRE
(4) 80 CRI, 3000K, 1200mA LIGHTSQUARES WITH 16 LEDS EACH AND TYPE III
SPILL LIGHT ELIMINATOR OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 21248 lumens
Efficiency: N/A
Efficacy: 82.4 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
IES Classification: Type III - Medium
BUG Rating: B2 - U0 - G4


Input Watts (W): 258
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P323698
 CATALOG NUMBER: GAN-SA4D-830-U-SL3-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

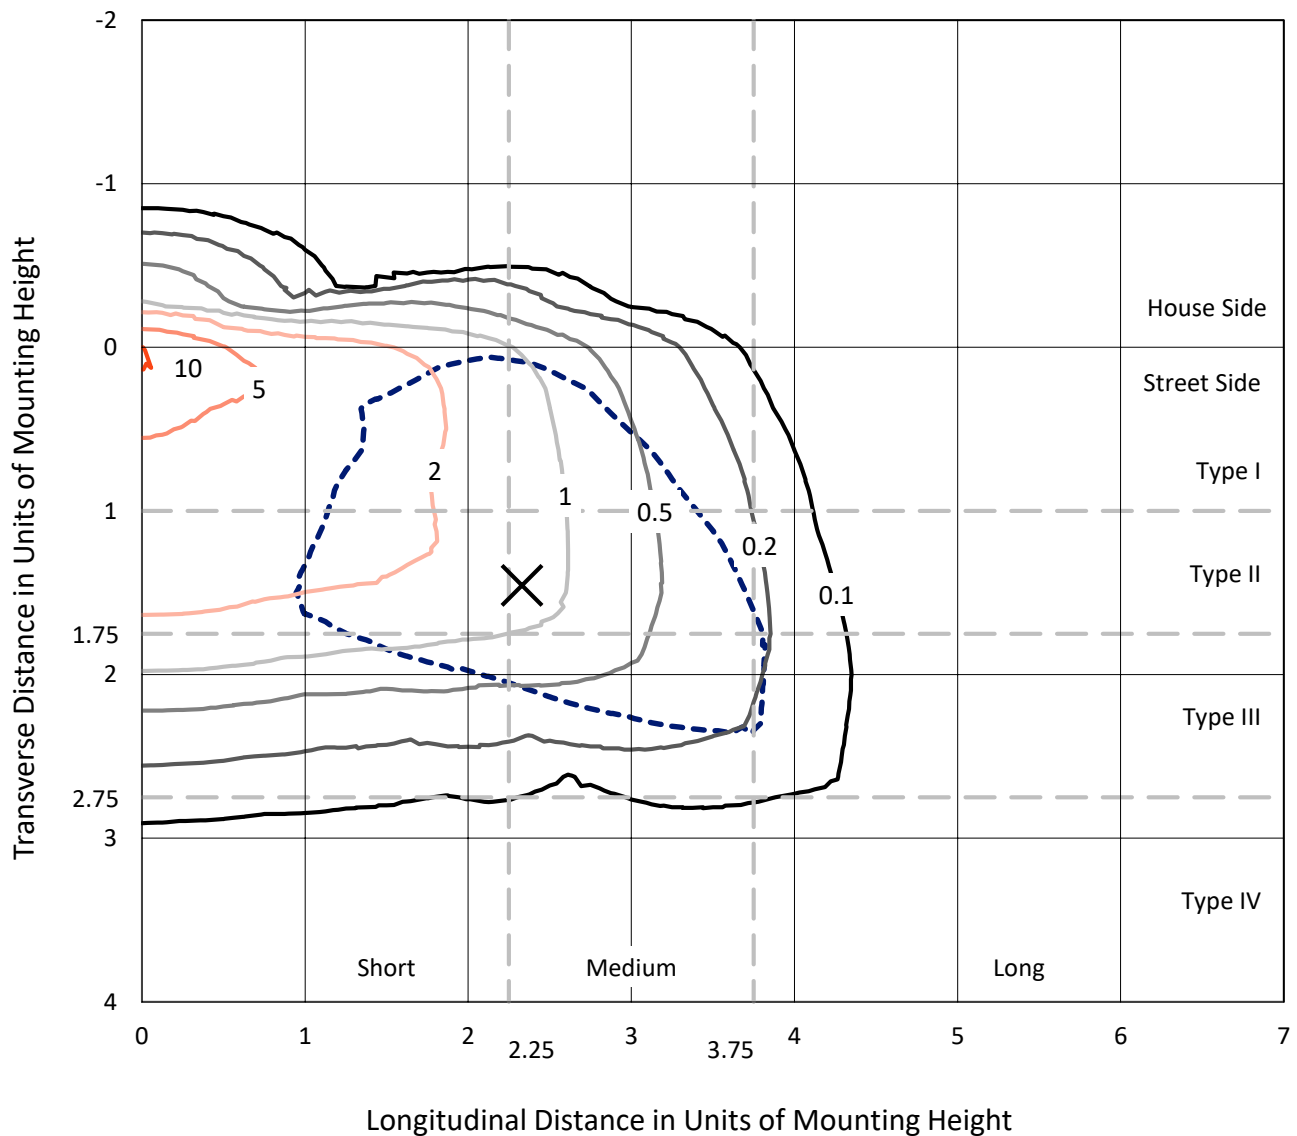

Based on 25 foot mounting height. Maximum calculated value = 10.2 fc
 Type III - Medium - N/A

REPORT NUMBER: P323698
CATALOG NUMBER: GAN-SA4D-830-U-SL3-HSS

Luminous Intensity Polar Plot

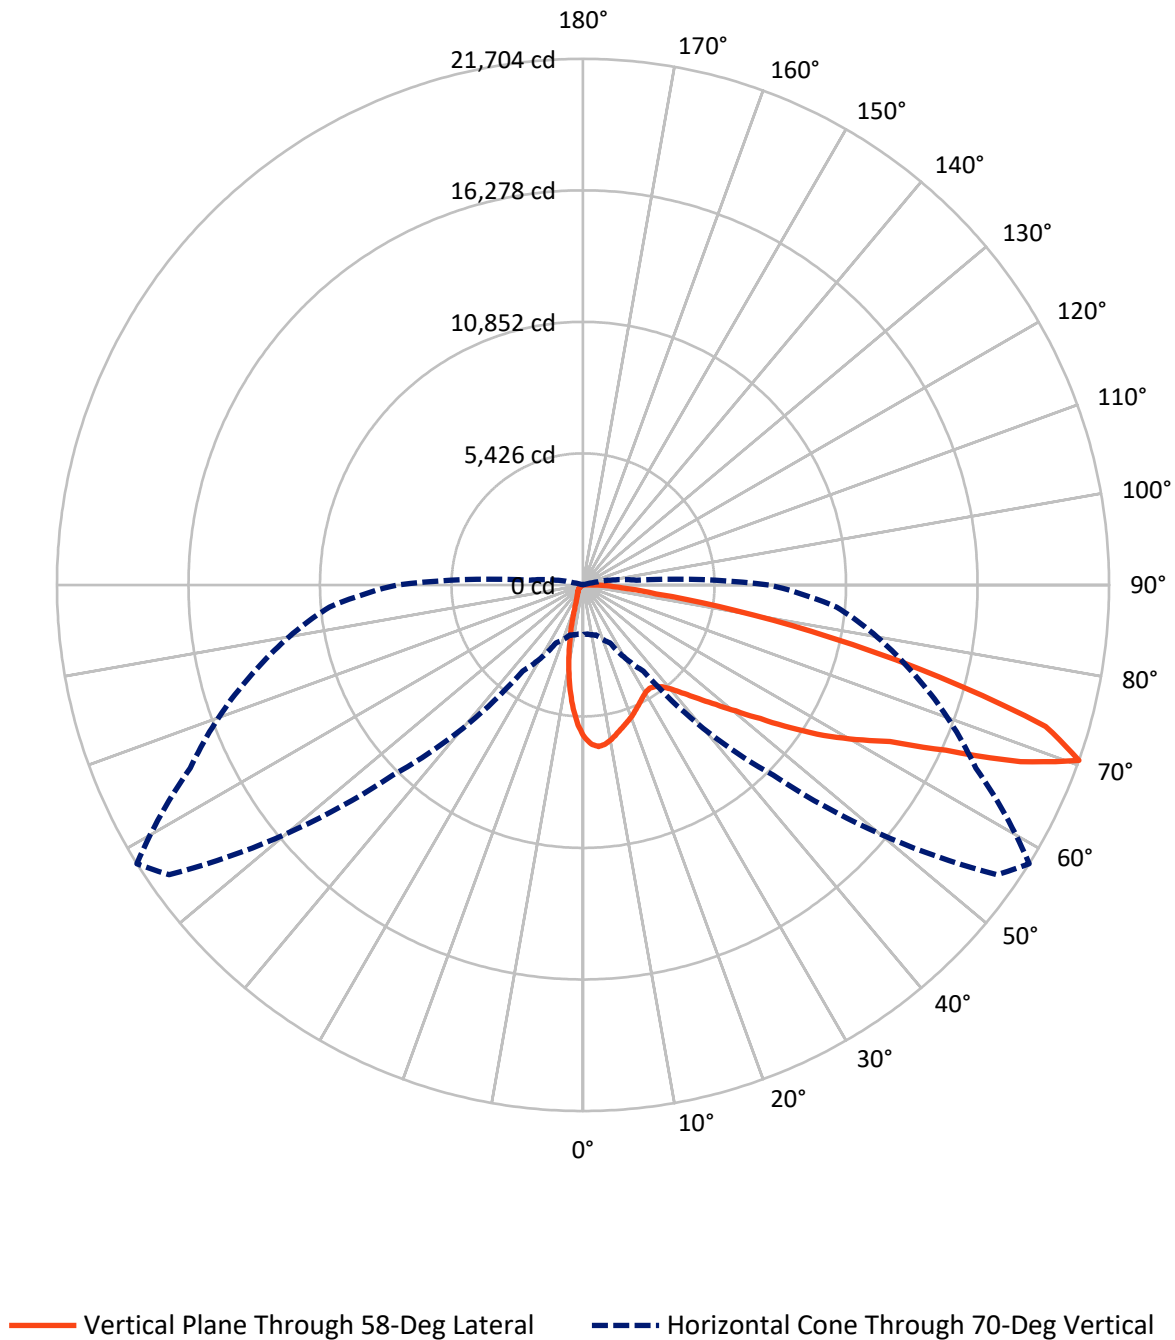

REPORT NUMBER: P323698

CATALOG NUMBER: GAN-SA4D-830-U-SL3-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1818.4	0.0	1818.4
	% Fixture	8.6	0.0	8.6
Street Side	Lumens	19429.7	0.0	19429.7
	% Fixture	91.4	0.0	91.4
Total	Lumens	21248.0	0.0	21248.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	513.3	2.4
10°-20°	1077.2	5.1
20°-30°	1416.2	6.7
30°-40°	1875.6	8.8
40°-50°	2803.4	13.2
50°-60°	4490.9	21.1
60°-70°	5660.7	26.6
70°-80°	3053.4	14.4
80°-90°	357.4	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	21248.0	100.0
0°-180°	21248.0	100.0

Coefficient of Utilization

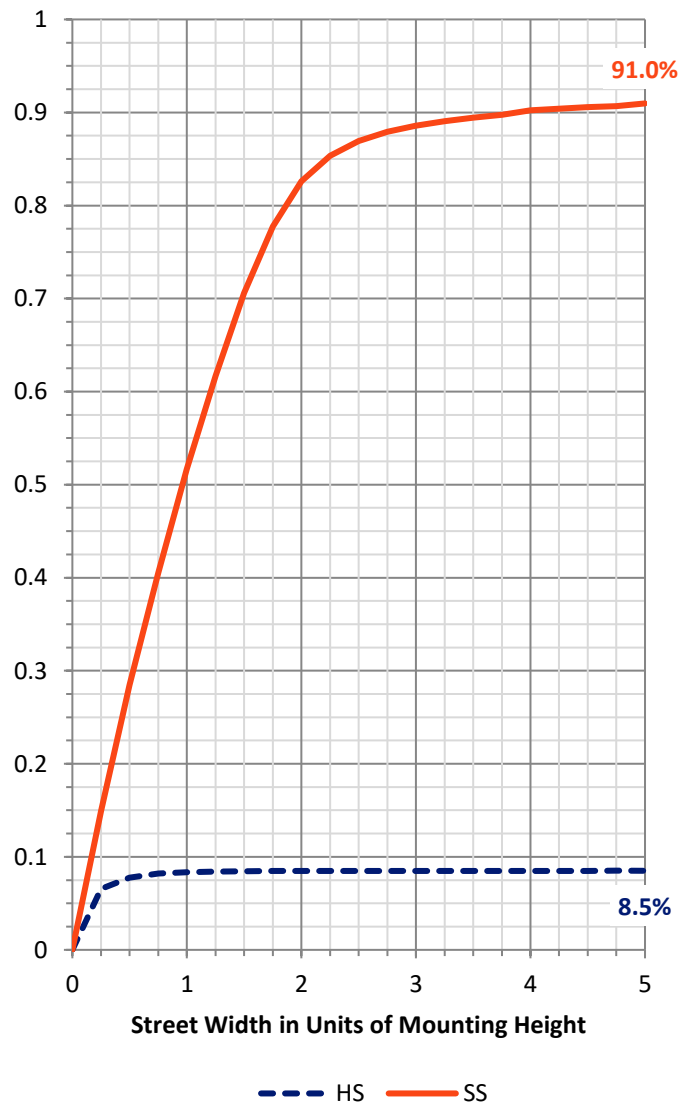

REPORT NUMBER: P323698


CATALOG NUMBER: GAN-SA4D-830-U-SL3-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	2276.1	10.7			
FM	(30°-60°)	8476.2	39.9			
FH	(60°-80°)	8323.1	39.2			G4/12000
FVH	(80°-90°)	354.3	1.7			G3/500
BL	(0°-30°)	730.5	3.4	B2/1000		
BM	(30°-60°)	693.7	3.3	B1/1000		
BH	(60°-80°)	391.1	1.8	B1/500		G1/500
BVH	(80°-90°)	3.1	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G4

Type III Medium

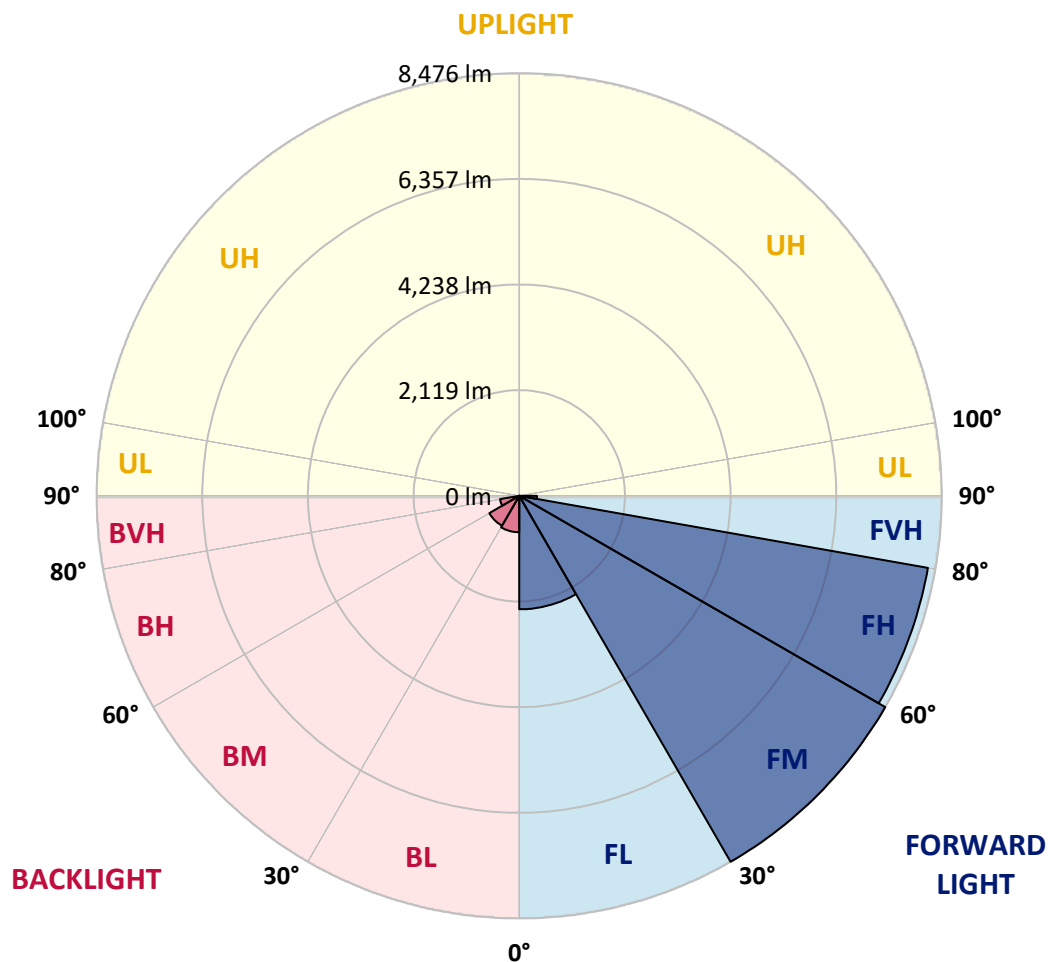



REPORT NUMBER: P323698

CATALOG NUMBER: GAN-SA4D-830-U-SL3-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	58°	65°	75°	85°
0°	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6
2.5°	6797.0	6780.2	6774.0	6763.4	6722.7	6683.0	6604.3	6582.3	6532.8	6415.3	6290.7
5°	6802.3	6801.4	6819.9	6815.5	6801.4	6782.8	6726.3	6697.1	6613.2	6445.3	6217.4
7.5°	6474.5	6491.3	6532.8	6566.4	6605.2	6655.6	6662.7	6634.4	6565.5	6384.3	6082.2
10°	6034.5	6061.0	6119.3	6185.6	6287.2	6387.9	6478.0	6474.5	6450.6	6272.1	5919.6
12.5°	5593.6	5624.5	5691.7	5789.7	5933.8	6098.1	6258.9	6281.0	6320.7	6171.4	5769.4
15°	5207.5	5234.0	5300.3	5420.4	5598.9	5819.8	6055.7	6096.3	6198.8	6092.8	5644.0
17.5°	4879.7	4896.5	4945.1	5078.5	5285.2	5553.0	5859.5	5939.1	6091.9	6030.9	5535.3
20°	4650.9	4653.5	4685.3	4779.0	4985.7	5285.2	5656.3	5770.3	5978.8	5977.9	5423.1
22.5°	4537.8	4528.9	4535.1	4589.0	4741.0	5029.9	5453.1	5588.3	5877.2	5932.9	5309.1
25°	4516.6	4509.5	4491.8	4498.9	4590.8	4806.4	5248.1	5404.5	5788.0	5905.5	5210.1
27.5°	4582.8	4589.9	4559.9	4528.1	4535.1	4661.5	5066.1	5247.3	5715.5	5905.5	5140.3
30°	4716.3	4719.8	4697.7	4656.2	4600.5	4620.8	4939.8	5120.9	5679.3	5946.1	5096.2
32.5°	4863.8	4883.2	4880.6	4847.0	4767.5	4685.3	4909.7	5075.0	5676.6	6036.2	5091.8
35°	5046.7	5068.8	5105.9	5098.8	5015.8	4880.6	5012.2	5142.1	5728.8	6184.7	5139.5
37.5°	5241.1	5274.6	5354.2	5392.2	5338.3	5185.4	5242.0	5334.7	5868.4	6425.0	5260.5
40°	5429.3	5467.3	5612.1	5761.5	5720.8	5563.6	5590.1	5664.3	6116.6	6770.4	5490.2
42.5°	5613.9	5670.5	5883.4	6129.0	6177.6	6052.1	6066.3	6125.5	6485.1	7245.8	5865.7
45°	5834.8	5898.4	6213.8	6516.9	6646.8	6592.0	6652.1	6690.9	6966.6	7874.0	6372.0
47.5°	6159.0	6232.4	6619.4	6964.8	7192.8	7228.1	7349.2	7374.8	7575.3	8605.5	7032.0
50°	6791.7	6812.0	7161.9	7475.5	7804.2	8016.2	8154.0	8173.5	8312.2	9405.1	7856.3
52.5°	7587.7	7601.0	7798.9	8009.2	8382.9	8815.8	9138.3	9165.7	9194.8	10184.4	8670.0
55°	8378.5	8376.7	8507.5	8631.2	9058.8	9687.8	10387.6	10404.4	10195.0	10923.9	9292.0
57.5°	8872.4	8920.1	9118.9	9277.9	9875.2	10681.8	11652.8	11714.7	11245.5	11471.7	9907.0
60°	8715.1	8738.1	9178.9	9767.4	10892.1	12094.6	12933.0	12948.9	12035.4	12018.6	10684.5
62.5°	7425.1	7437.5	8130.2	9343.3	11407.2	13927.0	14477.4	14218.6	12943.6	12777.5	11614.8
65°	5089.1	5169.5	5748.2	7247.6	10460.9	15076.5	16868.3	16439.7	14328.1	13871.3	12455.9
67.5°	2996.9	2980.1	3266.4	4370.8	7683.1	14313.1	19892.6	19466.7	16216.2	14603.8	12209.4
70°	2047.1	2035.6	2145.2	2646.2	4337.2	11103.3	20844.1	21703.8	17883.4	14110.8	10507.8
72.5°	1461.3	1467.5	1629.2	2056.0	2723.0	6469.2	17924.9	19959.7	17361.3	12301.3	7987.1
75°	992.2	1009.0	1240.5	1686.6	2387.3	3291.1	12720.1	15172.8	14137.3	8940.4	4590.8
77.5°	533.6	552.2	825.2	1358.9	2158.5	2286.6	8182.3	10442.4	8880.3	4019.2	1330.6
80°	222.6	233.3	386.1	987.8	1865.1	2008.3	4814.3	6332.2	3784.1	792.5	296.9
82.5°	96.3	101.6	160.8	589.3	1394.2	1695.5	2549.0	3046.4	1146.8	174.1	149.3
85°	18.6	19.4	66.3	311.9	889.7	956.9	1652.2	1619.5	515.1	75.1	108.7
87.5°	0.0	0.0	15.9	98.1	261.5	521.3	1008.1	995.7	174.9	36.2	40.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P323698

CATALOG NUMBER: GAN-SA4D-830-U-SL3-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6	6276.6
2.5°	6227.1	6166.1	6038.0	5879.9	5758.8	5625.4	5519.4	5385.1	5326.8	5329.4	5297.6
5°	6087.5	5962.0	5678.4	5320.6	5044.9	4760.4	4515.7	4271.8	4127.8	4081.0	4036.8
7.5°	5887.8	5689.0	5236.7	4685.3	4218.8	3762.9	3366.2	3017.2	2796.4	2688.6	2648.8
10°	5662.5	5383.3	4728.6	4002.4	3336.2	2719.5	2205.3	1758.2	1579.7	1458.7	1427.8
12.5°	5464.6	5086.5	4232.1	3301.7	2511.0	1767.0	1276.7	998.4	877.3	829.6	821.7
15°	5278.2	4809.0	3754.1	2667.4	1738.8	1087.6	812.0	717.4	689.1	681.2	681.2
17.5°	5102.4	4544.9	3286.7	2042.7	1150.3	762.5	672.4	651.2	642.3	641.4	642.3
20°	4918.6	4280.7	2827.3	1496.7	803.1	645.9	621.1	609.6	607.0	607.0	607.0
22.5°	4742.8	4016.5	2380.2	1069.1	644.1	589.3	576.9	569.0	566.3	565.5	563.7
25°	4574.0	3765.6	1943.8	755.4	565.5	539.8	529.2	518.6	510.7	506.3	503.6
27.5°	4435.3	3542.1	1537.3	606.1	510.7	488.6	475.3	459.4	440.0	431.2	427.6
30°	4324.9	3338.0	1184.8	511.6	459.4	437.3	417.0	389.6	361.4	346.3	345.5
32.5°	4238.3	3137.4	899.4	452.4	413.5	386.1	356.9	322.5	289.8	273.0	272.1
35°	4195.9	2960.7	687.4	409.1	372.8	338.4	302.2	264.2	232.4	216.5	214.7
37.5°	4224.1	2811.4	536.3	372.8	338.4	298.6	256.2	216.5	188.2	174.1	173.2
40°	4327.5	2716.0	435.6	341.9	309.2	260.6	214.7	177.6	153.7	142.2	141.4
42.5°	4547.5	2680.6	372.0	316.3	281.0	225.3	178.5	146.7	124.6	116.6	114.9
45°	4915.0	2732.7	328.7	291.6	251.8	191.7	147.5	120.2	100.7	94.5	93.7
47.5°	5404.5	2869.7	297.7	267.7	225.3	161.7	122.8	97.2	82.2	76.0	75.1
50°	6035.4	3087.0	272.1	243.9	200.6	136.9	101.6	76.9	63.6	59.2	59.2
52.5°	6721.9	3345.9	249.2	221.8	175.8	114.0	82.2	59.2	50.4	45.1	45.1
55°	7289.1	3572.1	224.4	205.0	145.8	94.5	62.7	45.1	37.1	34.5	34.5
57.5°	7855.4	3813.3	196.1	175.8	116.6	76.9	47.7	33.6	27.4	25.6	25.6
60°	8589.6	4108.4	168.8	143.1	91.9	58.3	35.3	23.9	20.3	19.4	19.4
62.5°	9397.2	4281.6	144.0	114.9	71.6	43.3	25.6	15.9	15.0	15.0	14.1
65°	9891.1	4036.8	121.0	91.9	55.7	32.7	16.8	11.5	13.3	12.4	10.6
67.5°	9261.1	3160.4	99.0	71.6	43.3	24.7	10.6	8.0	14.1	11.5	8.8
70°	7668.1	2212.3	76.9	50.4	34.5	21.2	7.1	5.3	15.0	11.5	7.1
72.5°	5738.5	1480.8	61.0	33.6	25.6	18.6	6.2	2.7	13.3	9.7	6.2
75°	3135.6	596.4	48.6	21.2	15.9	13.3	4.4	1.8	8.8	7.1	4.4
77.5°	825.2	157.3	35.3	14.1	8.8	5.3	2.7	0.9	4.4	3.5	1.8
80°	210.3	61.0	23.0	9.7	6.2	2.7	0.0	0.0	0.9	0.0	0.0
82.5°	112.2	25.6	14.1	7.1	3.5	0.0	0.0	0.0	0.0	0.0	0.0
85°	84.8	16.8	8.0	4.4	0.9	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	32.7	5.3	2.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)