

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P323380

Luminaire Tested: **GAN-SA6D-830-U-SL2-HSS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P323380
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1903-205-21)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GAN-SA6D-830-U-SL2-HSS
Description: GALLEON AREA AND ROADWAY LUMINAIRE
(6) 80 CRI, 3000K, 1200mA LIGHTSQUARES WITH 16 LEDS EACH AND TYPE II
SPILL LIGHT ELIMINATOR OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 30544 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type III - Medium
BUG Rating: B3 - U0 - G4


Input Watts (W): 382
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P323380
 CATALOG NUMBER: GAN-SA6D-830-U-SL2-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

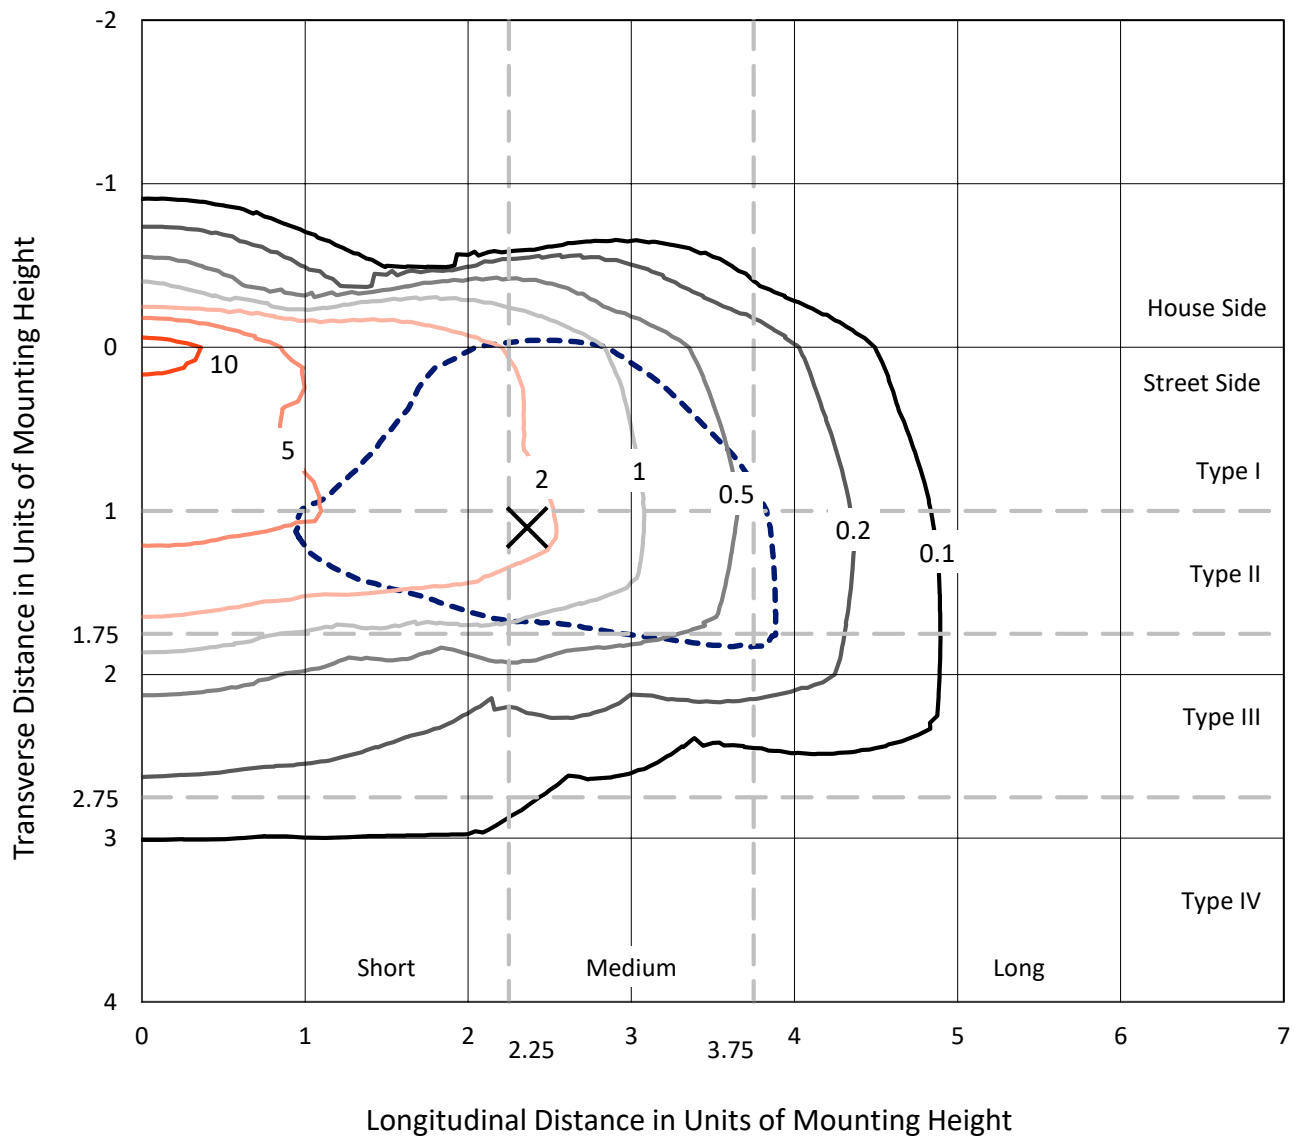

Based on 25 foot mounting height. Maximum calculated value = 12.3 fc
 Type III - Medium - N/A

REPORT NUMBER: P323380
CATALOG NUMBER: GAN-SA6D-830-U-SL2-HSS

Luminous Intensity Polar Plot

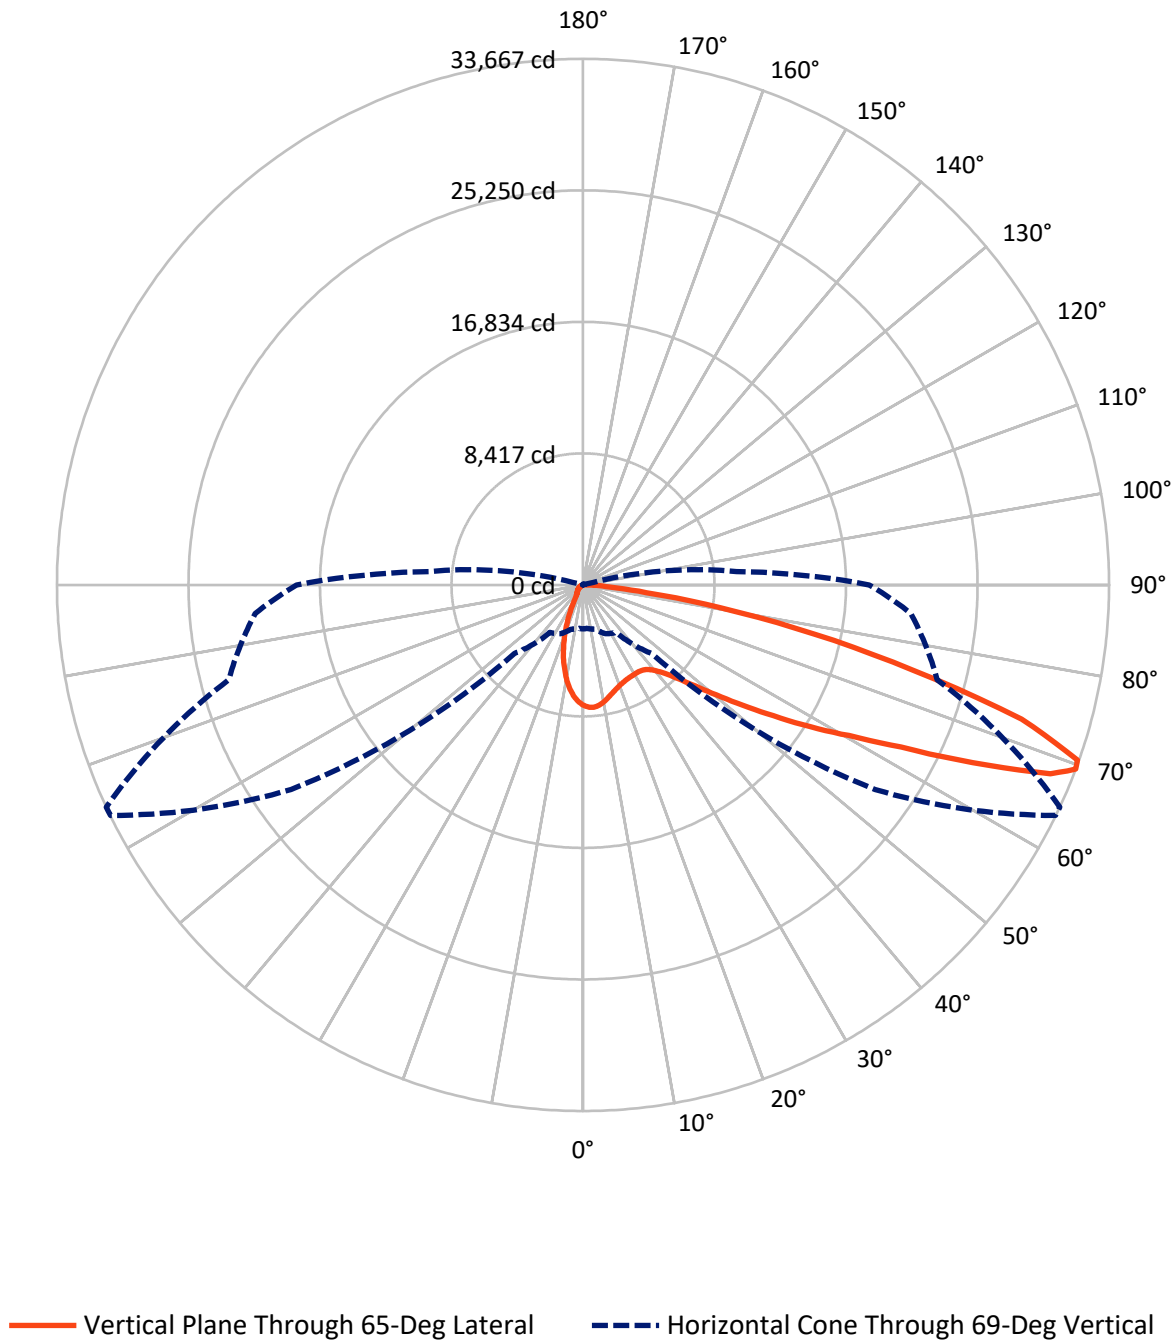

REPORT NUMBER: P323380

CATALOG NUMBER: GAN-SA6D-830-U-SL2-HSS

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3600.4	0.0	3600.4
	% Fixture	11.8	0.0	11.8
Street Side	Lumens	26943.6	0.0	26943.6
	% Fixture	88.2	0.0	88.2
Total	Lumens	30544.0	0.0	30544.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	645.4	2.1
10°-20°	1412.9	4.6
20°-30°	1956.9	6.4
30°-40°	2728.5	8.9
40°-50°	4241.0	13.9
50°-60°	6808.5	22.3
60°-70°	7701.5	25.2
70°-80°	4523.2	14.8
80°-90°	526.2	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	30544.0	100.0
0°-180°	30544.0	100.0

Coefficient of Utilization



REPORT NUMBER: P323380


CATALOG NUMBER: GAN-SA6D-830-U-SL2-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	2783.3	9.1			
FM	(30°-60°)	12473.3	40.8			
FH	(60°-80°)	11172.7	36.6			G4/12000
FVH	(80°-90°)	514.3	1.7			G4/750
BL	(0°-30°)	1231.9	4.0	B3/2500		
BM	(30°-60°)	1304.7	4.3	B2/2500		
BH	(60°-80°)	1052.0	3.4	B3/2500		G3/2500
BVH	(80°-90°)	11.8	0.0			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G4

Type III Medium

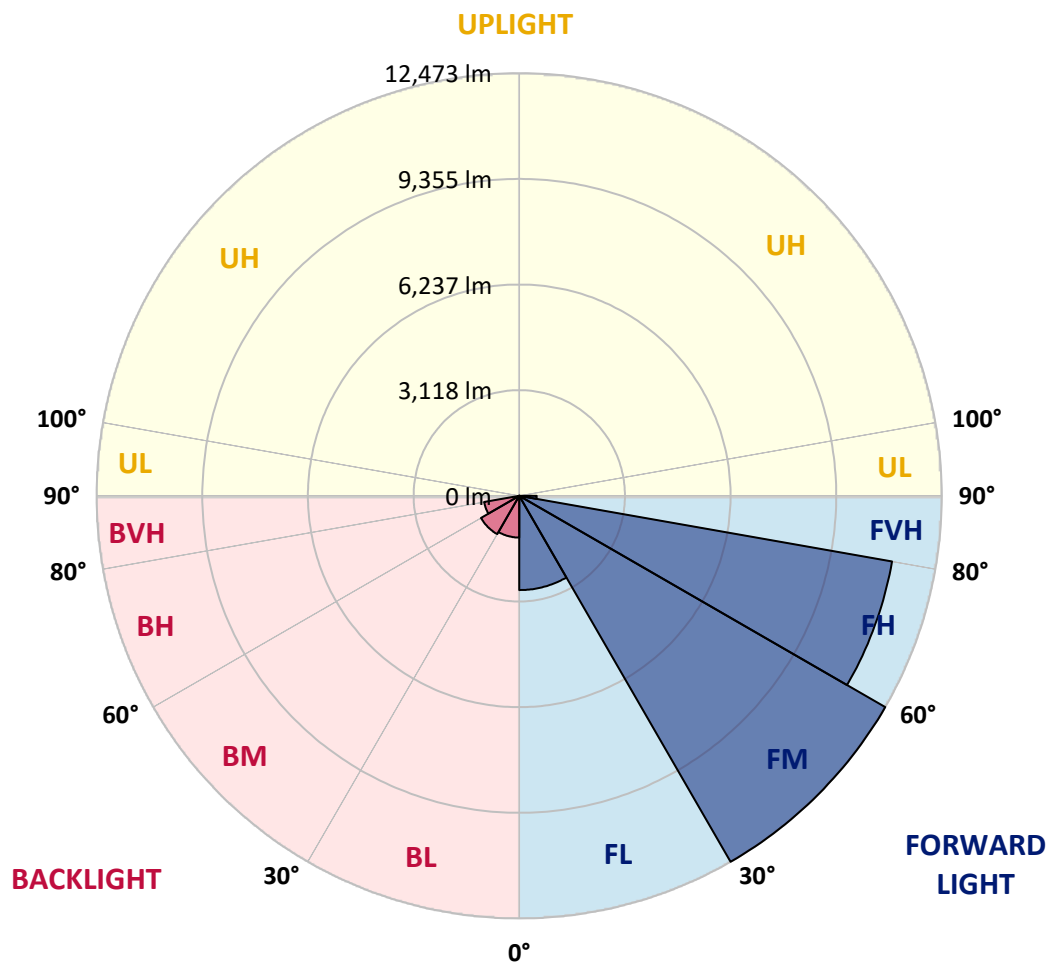



REPORT NUMBER: P323380

CATALOG NUMBER: GAN-SA6D-830-U-SL2-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	64°	65°	75°	85°
0°	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5
2.5°	7787.0	7767.6	7783.1	7816.7	7833.6	7833.6	7846.5	7831.0	7836.1	7798.7	7744.4
5°	7299.8	7270.0	7312.7	7407.0	7523.4	7622.9	7770.2	7847.8	7855.5	7856.8	7793.5
7.5°	6775.0	6747.9	6811.2	6922.4	7072.3	7257.1	7514.3	7739.2	7752.1	7873.6	7827.1
10°	6348.5	6329.1	6402.8	6521.7	6697.5	6904.3	7219.6	7532.4	7569.9	7838.7	7821.9
12.5°	6009.9	5994.4	6064.2	6201.2	6380.8	6609.6	6939.2	7302.4	7352.8	7759.9	7796.1
15°	5763.0	5760.5	5818.6	5950.4	6149.5	6362.7	6700.1	7089.1	7147.3	7674.6	7792.2
17.5°	5633.8	5637.7	5680.3	5792.8	5963.4	6175.3	6498.4	6909.4	6972.8	7598.3	7811.6
20°	5620.9	5624.8	5648.0	5711.3	5849.6	6037.0	6334.3	6758.2	6824.1	7541.5	7842.6
22.5°	5734.6	5732.0	5738.5	5732.0	5809.6	5951.7	6225.7	6641.9	6718.2	7504.0	7867.2
25°	5953.0	5949.2	5946.6	5898.8	5847.1	5923.3	6180.5	6576.0	6648.4	7476.8	7881.4
27.5°	6256.8	6254.2	6250.3	6171.5	6016.4	5968.5	6185.7	6551.4	6612.2	7454.9	7878.8
30°	6656.1	6674.2	6669.1	6559.2	6317.5	6106.8	6240.0	6538.5	6591.5	7412.2	7851.6
32.5°	7125.3	7161.5	7189.9	7072.3	6769.9	6380.8	6365.3	6552.7	6591.5	7379.9	7802.5
35°	7612.5	7659.1	7763.8	7722.4	7324.3	6793.1	6581.2	6638.0	6670.3	7398.0	7779.3
37.5°	8092.0	8147.6	8375.1	8495.3	8050.7	7338.5	6917.2	6848.7	6865.5	7507.9	7805.1
40°	8649.1	8733.1	9078.2	9272.0	8917.9	8068.8	7420.0	7210.6	7217.1	7749.5	7925.3
42.5°	9380.6	9467.2	9840.7	10144.5	9895.0	8991.6	8102.4	7763.8	7757.3	8201.9	8208.4
45°	10272.4	10362.9	10749.3	11086.7	10974.2	10085.0	8976.1	8571.5	8563.8	8915.3	8744.7
47.5°	11283.1	11372.3	11717.4	12065.0	12186.5	11361.9	10088.9	9674.0	9655.9	9906.6	9573.2
50°	12150.3	12208.5	12526.4	12994.3	13542.3	12931.0	11473.1	11073.7	11054.3	11223.7	10789.4
52.5°	12465.7	12499.3	12822.4	13477.7	14845.1	15055.8	13291.6	12777.2	12763.0	12836.6	12408.8
55°	11827.2	11888.0	12284.8	13256.7	15550.8	17457.1	15587.0	14886.5	14779.2	14620.2	14101.9
57.5°	10087.6	10184.5	10611.0	11903.5	15221.2	19362.2	18960.3	17272.3	17114.6	16142.7	15478.4
60°	7558.3	7677.2	8031.3	9425.9	13462.2	20040.8	22646.3	19930.9	19575.5	17355.0	16743.7
62.5°	5186.6	5246.1	5486.5	6395.1	9914.4	18929.2	25730.1	23491.6	22842.8	18673.3	18112.4
65°	3961.4	3982.0	4080.3	4393.0	5903.9	15376.3	26956.7	28189.7	27405.1	20250.1	19532.8
67.5°	3192.4	3175.6	3311.3	3758.4	3953.6	9380.6	25525.9	32634.4	32267.4	22358.1	20962.3
69°	2815.0	2791.7	2930.0	3449.6	3713.2	6201.2	22819.5	33643.8	33667.1	23470.9	21060.5
70°	2533.2	2548.7	2685.7	3266.0	3631.8	4867.4	20234.6	33386.6	33570.1	23887.1	20471.1
72.5°	1691.8	1733.2	2008.5	2711.6	3492.2	3683.5	12217.5	28649.8	29355.5	22950.1	17563.1
75°	953.8	984.8	1311.8	2044.7	3290.6	3507.7	6453.2	21107.0	21789.4	19191.6	13543.6
77.5°	467.9	484.7	741.9	1319.6	2751.6	3342.3	3660.2	14337.2	15116.5	12526.4	7660.4
80°	197.7	206.8	370.9	814.2	1967.1	3189.8	2718.0	8823.6	8920.5	4907.4	2040.8
82.5°	76.3	78.8	156.4	507.9	1249.8	2486.7	2273.4	4183.7	4082.9	924.1	465.3
85°	9.0	10.3	56.9	305.0	695.3	1279.5	1846.9	1803.0	1668.6	183.5	239.1
87.5°	0.0	0.0	3.9	93.1	206.8	599.7	960.3	748.3	674.7	59.5	124.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P323380

CATALOG NUMBER: GAN-SA6D-830-U-SL2-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5	7718.5
2.5°	7699.1	7686.2	7616.4	7515.6	7420.0	7301.1	7187.3	7118.8	7064.5	7028.4	7071.0
5°	7719.8	7662.9	7451.0	7179.6	6913.3	6613.5	6334.3	6097.8	6004.7	5901.3	5947.9
7.5°	7713.4	7606.1	7224.8	6741.4	6252.9	5747.5	5269.3	4901.0	4709.7	4522.3	4570.1
10°	7681.0	7500.1	6922.4	6206.4	5474.8	4748.5	4069.9	3554.2	3266.0	3005.0	3042.4
12.5°	7610.0	7357.9	6565.7	5593.7	4615.3	3657.6	2862.8	2202.3	1848.2	1691.8	1711.2
15°	7567.3	7219.6	6188.3	4973.4	3697.7	2547.4	1750.0	1301.5	1139.9	1088.2	1094.7
17.5°	7546.6	7086.5	5797.9	4263.8	2759.4	1622.0	1130.9	997.8	962.9	953.8	956.4
20°	7525.9	6952.1	5396.0	3562.0	1901.2	1090.8	929.3	890.5	877.6	865.9	868.5
22.5°	7491.1	6822.9	4964.3	2851.1	1282.1	885.3	837.5	800.0	772.9	758.7	761.3
25°	7448.4	6687.1	4523.6	2123.5	935.7	789.7	744.5	691.5	659.2	633.3	634.6
27.5°	7379.9	6520.4	4068.6	1545.8	785.8	707.0	646.2	588.1	533.8	504.1	504.1
30°	7284.3	6331.7	3563.3	1106.3	704.4	625.5	551.9	479.5	421.3	394.2	391.6
32.5°	7178.3	6135.3	3052.8	838.8	639.8	549.3	465.3	389.0	337.3	315.4	314.1
35°	7087.8	5923.3	2543.5	703.1	575.1	475.6	383.9	319.2	277.9	259.8	258.5
37.5°	7029.6	5711.3	2047.2	628.1	517.0	407.1	321.8	263.7	233.9	219.7	218.4
40°	7020.6	5553.7	1593.6	571.3	462.7	346.4	268.8	223.6	196.5	180.9	179.7
42.5°	7138.2	5463.2	1222.7	523.4	407.1	293.4	228.8	191.3	162.8	147.3	146.0
45°	7447.1	5491.6	940.9	480.8	351.5	248.2	193.9	159.0	133.1	121.5	118.9
47.5°	8010.6	5688.1	748.3	438.1	298.6	210.7	165.4	131.8	109.9	98.2	96.9
50°	9013.6	6149.5	625.5	391.6	249.4	179.7	137.0	107.3	89.2	78.8	77.5
52.5°	10344.8	6971.5	558.3	346.4	206.8	152.5	112.4	85.3	69.8	62.0	60.7
55°	11813.0	7966.7	514.4	297.3	169.3	126.7	89.2	67.2	54.3	47.8	45.2
57.5°	13246.3	8828.7	473.0	249.4	140.9	103.4	71.1	53.0	42.7	36.2	34.9
60°	14563.3	9621.0	425.2	200.3	115.0	81.4	55.6	41.4	33.6	27.1	27.1
62.5°	15973.4	10233.6	359.3	156.4	94.3	62.0	45.2	37.5	27.1	23.3	22.0
65°	17467.5	10688.6	281.8	121.5	73.7	46.5	37.5	38.8	22.0	16.8	15.5
67.5°	18571.2	10598.1	208.1	95.6	56.9	36.2	36.2	41.4	19.4	12.9	11.6
69°	18328.3	9862.7	174.5	82.7	49.1	31.0	33.6	41.4	18.1	11.6	10.3
70°	17623.9	9048.5	153.8	73.7	43.9	28.4	32.3	40.1	16.8	11.6	10.3
72.5°	14677.1	6815.1	120.2	55.6	34.9	23.3	27.1	34.9	16.8	11.6	9.0
75°	11040.1	4362.0	91.8	40.1	25.8	18.1	20.7	25.8	16.8	10.3	9.0
77.5°	6007.3	1572.9	65.9	27.1	18.1	14.2	14.2	19.4	15.5	7.8	5.2
80°	1544.5	395.5	41.4	18.1	14.2	10.3	9.0	12.9	9.0	1.3	0.0
82.5°	381.3	89.2	22.0	12.9	10.3	3.9	3.9	6.5	3.9	0.0	0.0
85°	209.4	43.9	14.2	9.0	5.2	0.0	0.0	1.3	0.0	0.0	0.0
87.5°	107.3	12.9	3.9	2.6	1.3	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)