

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P459633

Luminaire Tested: **GAN-SA6A-AMB-U-5WQ**

Issue Date: 1/6/2021

Test Information

Test Method: LM-79-08
Report Number: P459633
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2003-697-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/6/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GAN-SA6A-AMB-U-5WQ
Description: GALLEON ROADWAY AND AREA LUMINAIRE
(6) NARROW BAND AMBER, 500mA LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V
WIDE OPTICS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6331 lumens
Efficiency: N/A
Efficacy: 53.2 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type V - Short - Non-Cutoff
BUG Rating: B3 - U0 - G2


Input Watts (W): 119
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P459633
 CATALOG NUMBER: GAN-SA6A-AMB-U-5WQ

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

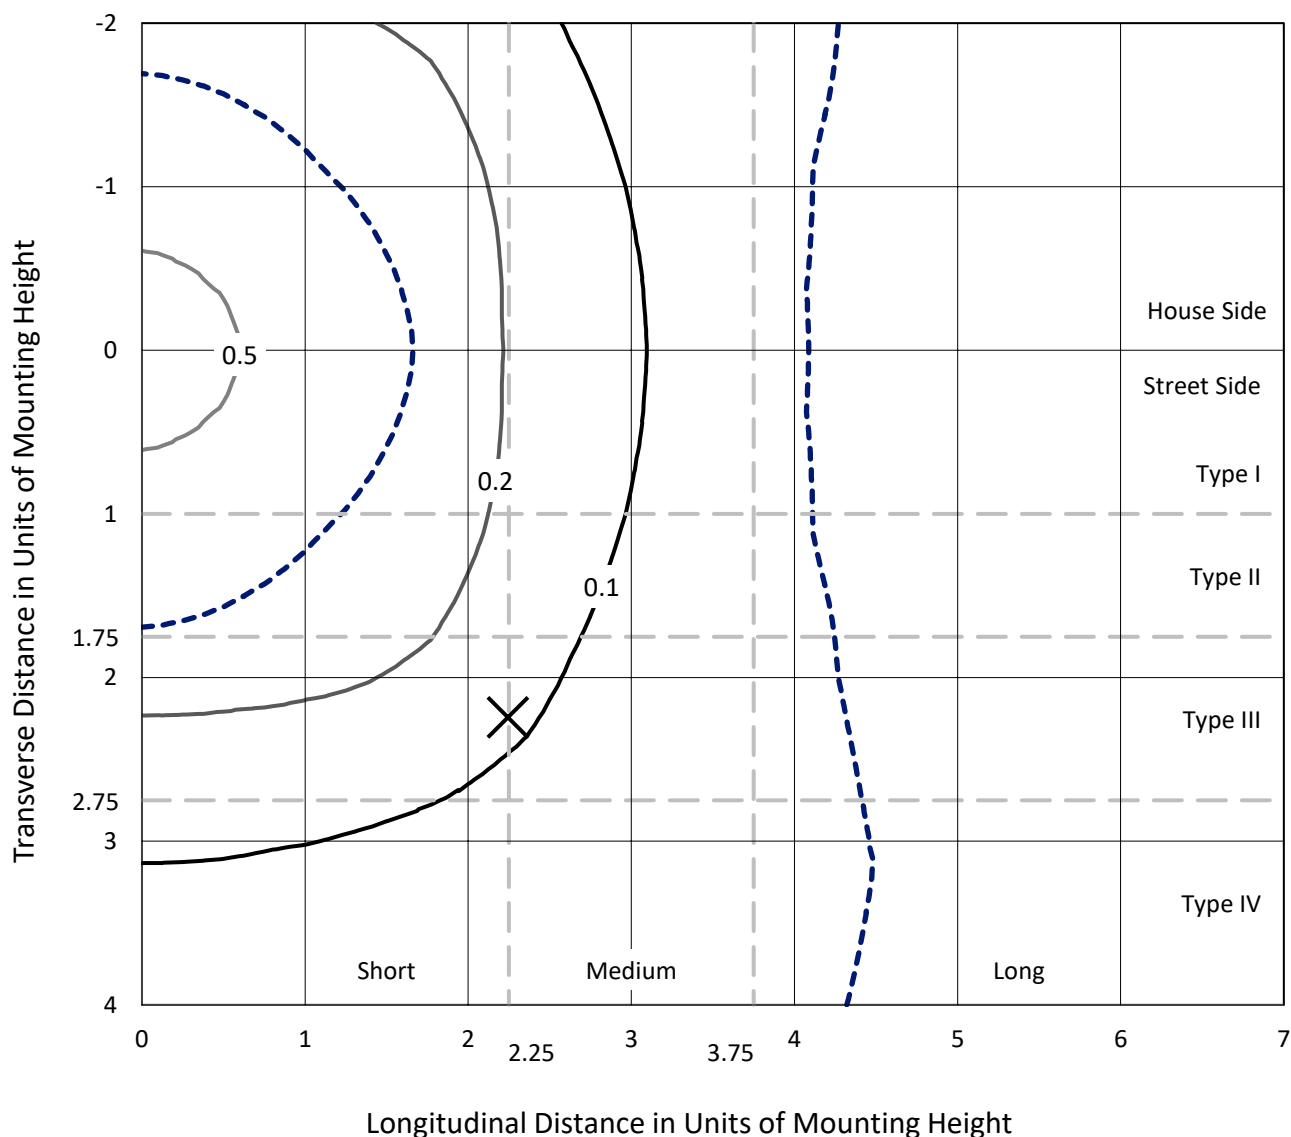

Based on 25 foot mounting height. Maximum calculated value = 0.7 fc
 Type V - Short - Non-Cutoff

REPORT NUMBER: P459633
CATALOG NUMBER: GAN-SA6A-AMB-U-5WQ

Luminous Intensity Polar Plot

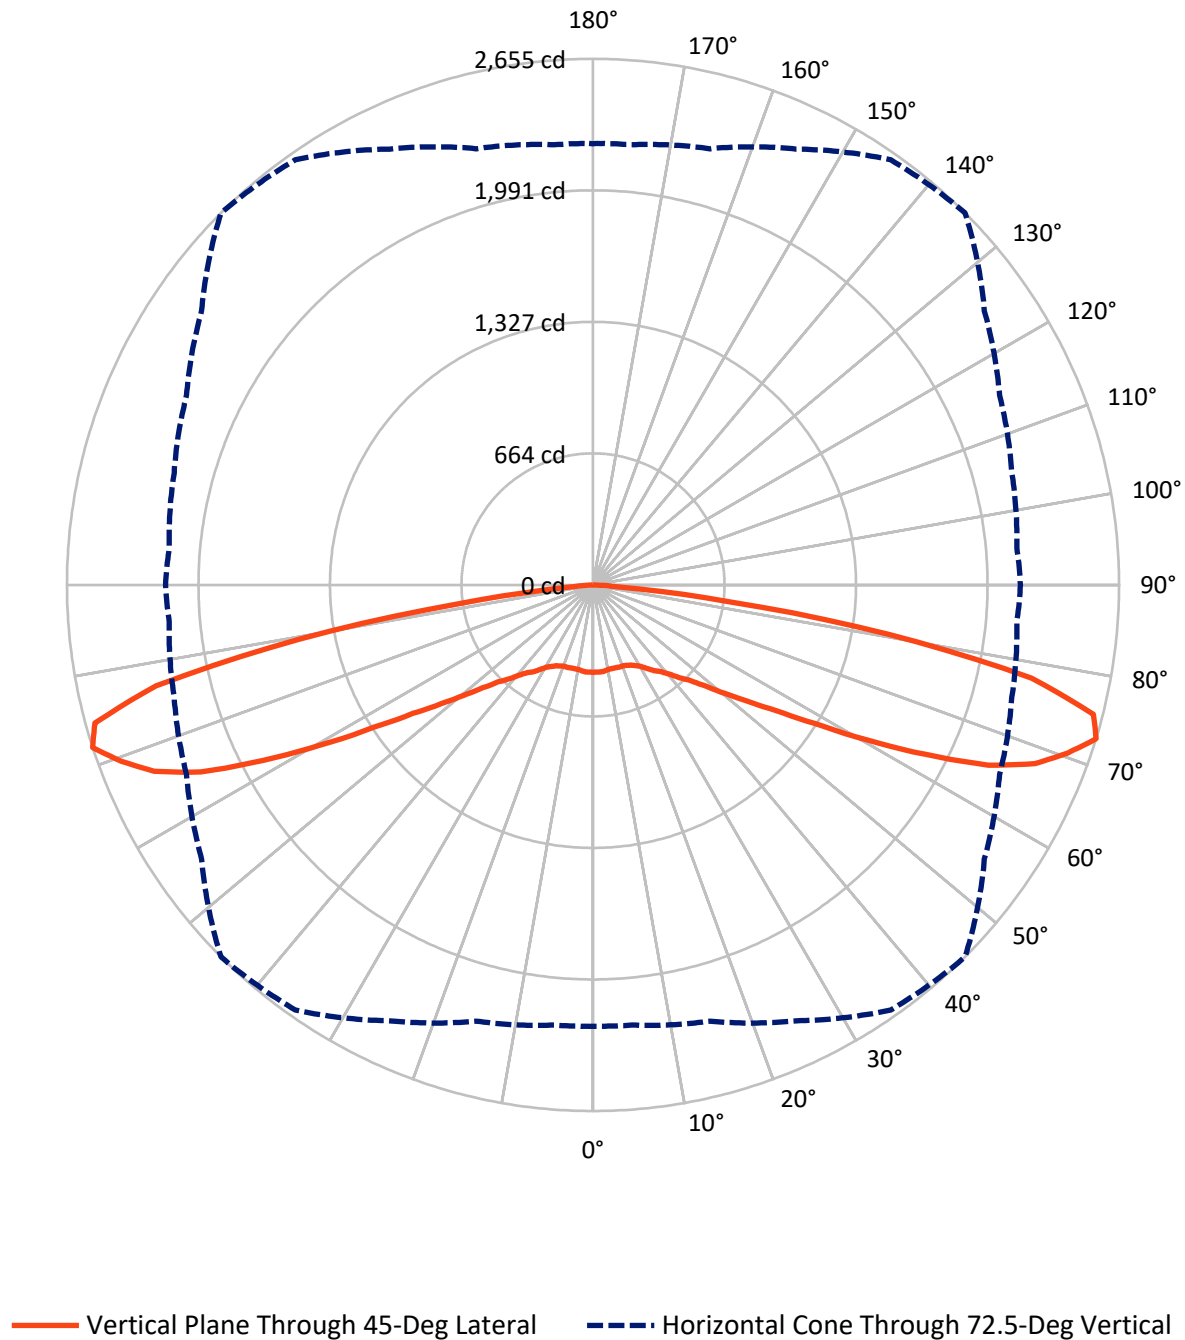

REPORT NUMBER: P459633

CATALOG NUMBER: GAN-SA6A-AMB-U-5WQ


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3165.5	0.0	3165.5
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	3165.5	0.0	3165.5
	% Fixture	50.0	0.0	50.0
Total	Lumens	6331.0	0.0	6331.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.9	0.7
10°-20°	124.4	2.0
20°-30°	213.0	3.4
30°-40°	334.0	5.3
40°-50°	552.8	8.7
50°-60°	1019.2	16.1
60°-70°	1893.3	29.9
70°-80°	1971.3	31.1
80°-90°	181.1	2.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	6331.0	100.0
0°-180°	6331.0	100.0

Coefficient of Utilization

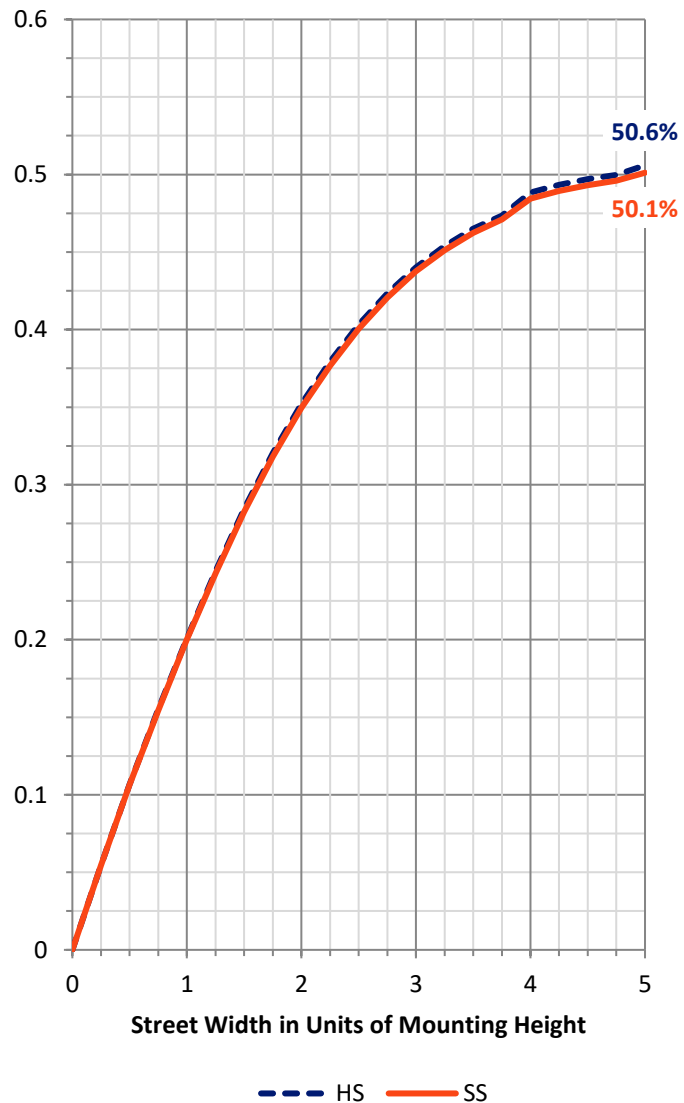

REPORT NUMBER: P459633


CATALOG NUMBER: GAN-SA6A-AMB-U-5WQ

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	189.6	3.0			
FM	(30°-60°)	953.0	15.1			
FH	(60°-80°)	1932.3	30.5			G2/5000
FVH	(80°-90°)	90.6	1.4			G1/100
BL	(0°-30°)	189.6	3.0	B1/500		
BM	(30°-60°)	953.0	15.1	B1/1000		
BH	(60°-80°)	1932.3	30.5	B3/2500		G2/5000
BVH	(80°-90°)	90.6	1.4			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G2

Type V Short

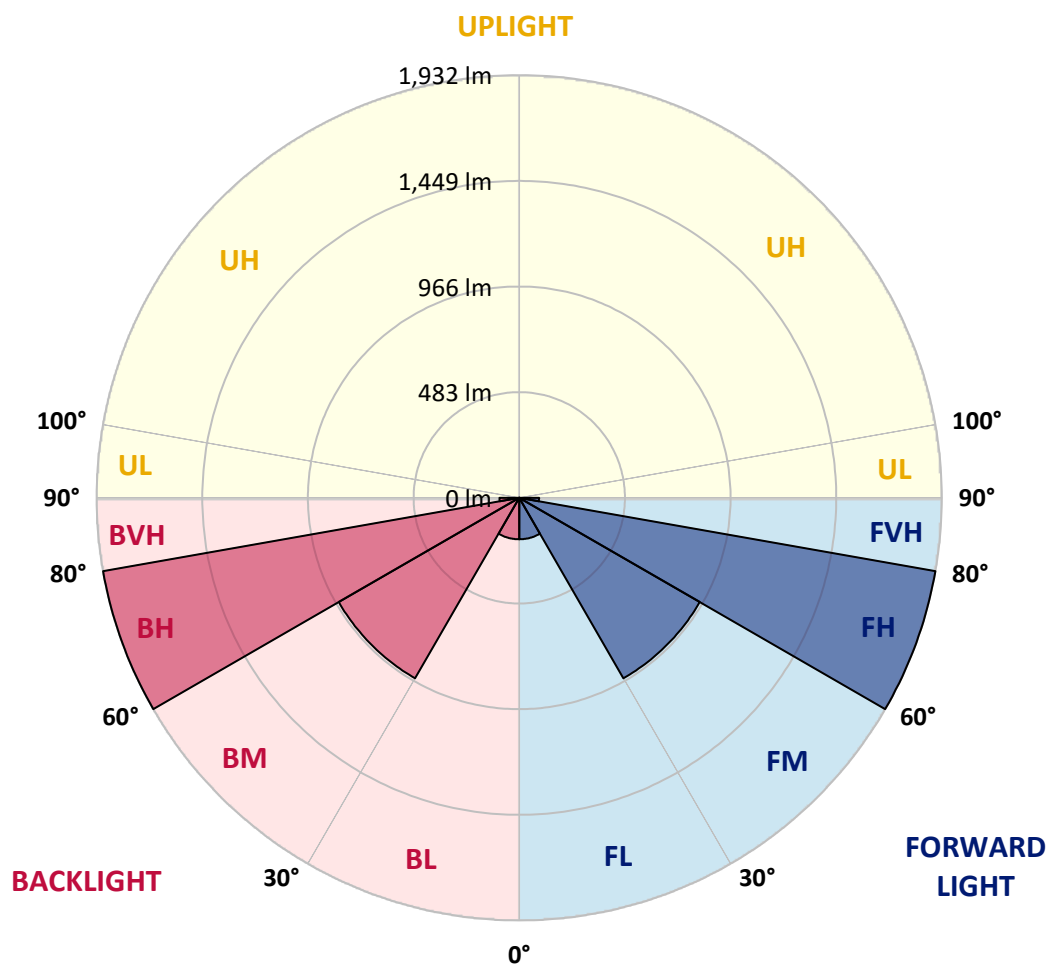

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269



REPORT NUMBER: P459633

CATALOG NUMBER: GAN-SA6A-AMB-U-5WQ

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	440.7	440.7	440.7	440.7	440.7	440.7	440.7	440.7	440.7	440.7	440.7
2.5°	443.3	443.3	443.3	440.7	440.7	440.7	440.7	440.7	440.7	440.7	440.7
5°	443.3	443.3	443.3	443.3	440.7	440.7	440.7	438.1	438.1	438.1	440.7
7.5°	440.7	443.3	440.7	440.7	438.1	438.1	435.5	435.5	435.5	435.5	435.5
10°	443.3	443.3	440.7	438.1	435.5	432.9	432.9	432.9	432.9	435.5	435.5
12.5°	445.9	445.9	440.7	435.5	435.5	432.9	432.9	432.9	432.9	435.5	438.1
15°	448.5	448.5	443.3	435.5	435.5	432.9	432.9	432.9	438.1	440.7	443.3
17.5°	453.7	451.1	443.3	438.1	435.5	435.5	435.5	435.5	440.7	445.9	445.9
20°	453.7	453.7	445.9	438.1	438.1	435.5	438.1	438.1	443.3	448.5	451.1
22.5°	461.4	458.8	448.5	443.3	440.7	440.7	443.3	443.3	448.5	453.7	456.2
25°	469.2	469.2	458.8	451.1	448.5	448.5	451.1	451.1	456.2	464.0	466.6
27.5°	484.8	482.2	471.8	464.0	461.4	461.4	466.6	466.6	469.2	477.0	479.6
30°	497.7	497.7	487.4	484.8	479.6	477.0	482.2	487.4	487.4	492.5	495.1
32.5°	508.1	508.1	502.9	502.9	505.5	502.9	508.1	505.5	502.9	508.1	508.1
35°	526.2	526.2	521.1	518.5	528.8	531.4	528.8	521.1	521.1	526.2	528.8
37.5°	554.8	554.8	549.6	544.4	547.0	554.8	547.0	544.4	549.6	557.3	559.9
40°	596.2	598.8	593.6	591.0	583.3	591.0	583.3	588.5	596.2	601.4	601.4
42.5°	642.9	645.5	637.7	632.5	635.1	640.3	629.9	632.5	642.9	650.7	650.7
45°	715.5	712.9	699.9	692.1	684.4	687.0	681.8	694.7	705.1	718.1	723.3
47.5°	785.5	782.9	777.7	769.9	759.5	762.1	762.1	772.5	785.5	798.4	798.4
50°	873.6	873.6	865.8	860.6	852.9	858.1	852.9	865.8	881.4	891.8	894.3
52.5°	974.7	972.1	972.1	969.5	964.3	974.7	966.9	982.5	995.4	998.0	1003.2
55°	1081.0	1088.8	1099.1	1099.1	1106.9	1117.3	1112.1	1114.7	1125.1	1114.7	1119.9
57.5°	1218.4	1226.2	1241.7	1262.5	1288.4	1316.9	1298.7	1285.8	1265.0	1249.5	1246.9
60°	1361.0	1368.7	1399.8	1462.1	1526.9	1589.1	1534.6	1475.0	1428.4	1389.5	1386.9
62.5°	1516.5	1529.5	1573.5	1666.8	1791.3	1884.6	1799.1	1682.4	1596.9	1537.2	1539.8
65°	1721.3	1729.1	1775.7	1884.6	2079.0	2193.1	2060.9	1905.3	1799.1	1731.7	1734.2
67.5°	2029.8	2024.6	2047.9	2151.6	2312.3	2405.7	2247.5	2120.5	2011.6	1933.9	1946.8
70°	2244.9	2242.3	2257.9	2366.8	2522.3	2540.5	2382.3	2239.7	2149.0	2102.4	2102.4
72.5°	2226.8	2229.4	2278.6	2426.4	2618.2	2654.5	2410.8	2263.1	2187.9	2146.4	2156.8
75°	1801.6	1806.8	1946.8	2216.4	2537.9	2607.9	2346.0	2097.2	1879.4	1760.2	1739.4
77.5°	865.8	873.6	1081.0	1526.9	2047.9	2263.1	2029.8	1506.1	1101.7	894.3	915.1
80°	261.8	269.6	357.7	627.3	1171.7	1511.3	1213.2	619.6	316.3	230.7	230.7
82.5°	57.0	70.0	83.0	137.4	404.4	689.6	404.4	152.9	93.3	67.4	62.2
85°	31.1	31.1	46.7	49.3	64.8	114.1	77.8	62.2	54.4	36.3	36.3
87.5°	13.0	13.0	23.3	23.3	25.9	18.1	28.5	31.1	31.1	18.1	18.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)