

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1064710

Luminaire Tested: **GLAN-SA3B-760-U-RBC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1064710
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SA3B-760-U-RBC
Description: GALLEON II AREA AND ROADWAY LUMINAIRE 800mA 3xLight Square PACKAGE
70CRI 5700K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL
Light Source: (42) 5700K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12883.1 lumens
Efficiency: N/A
Efficacy: 121.3 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
IES Classification: Type III - Short
BUG Rating: B0 - U0 - G2

Input Watts (W): 106.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

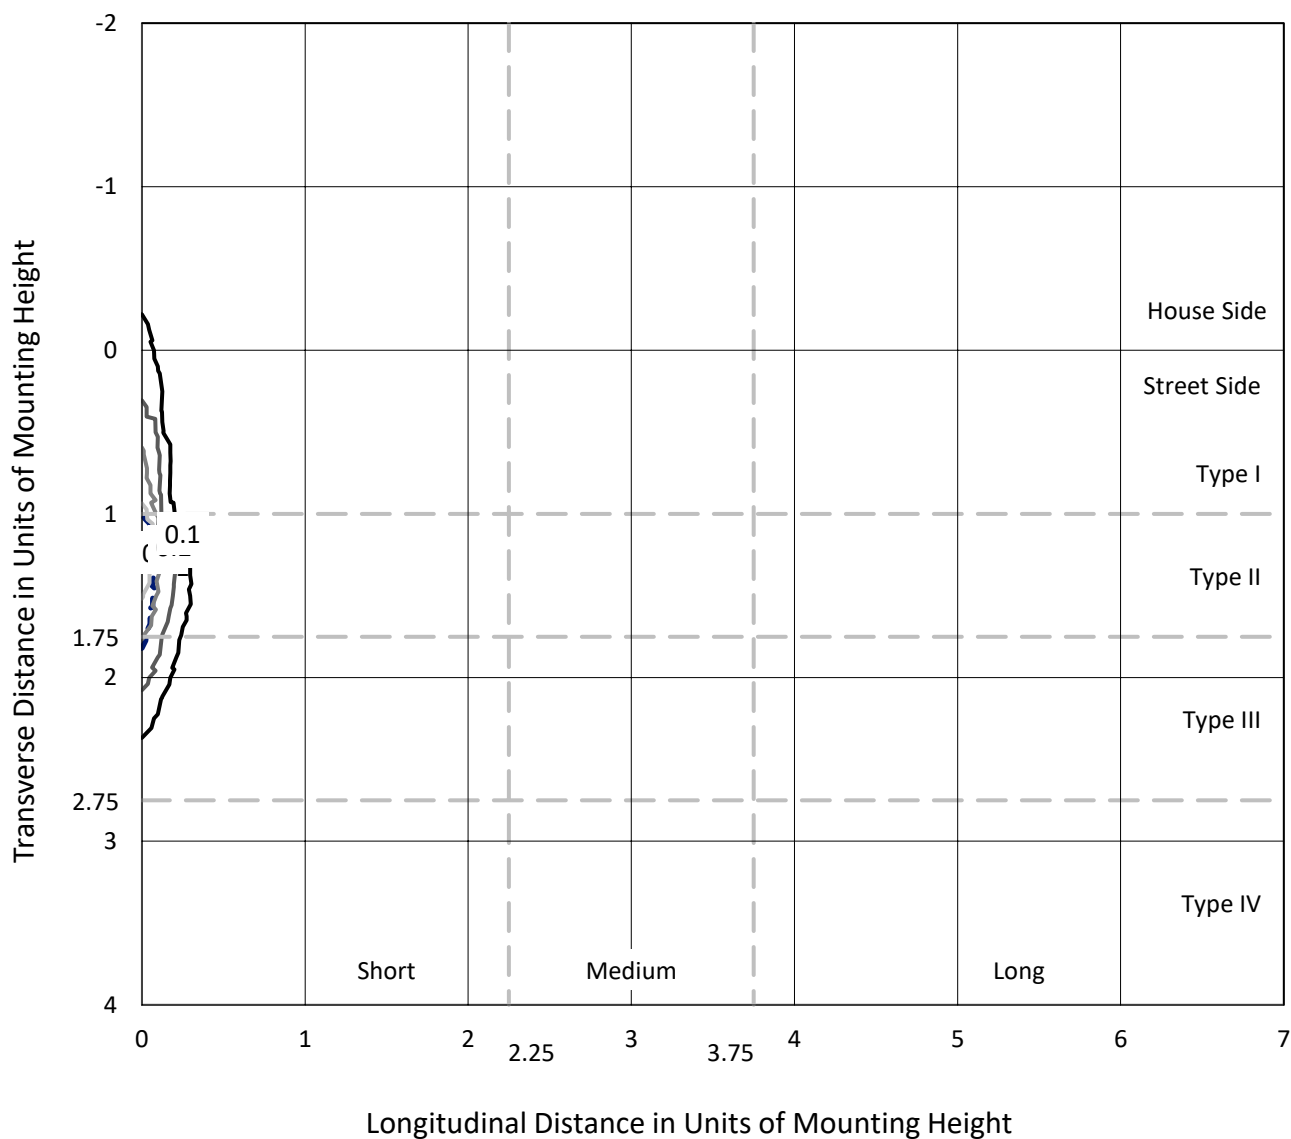

Based on 20 foot mounting height. Maximum calculated value = 1.9 fc
 Type III - Short - N/A

REPORT NUMBER: P1064710
CATALOG NUMBER: GLAN-SA3B-760-U-RBC

Luminous Intensity Polar Plot

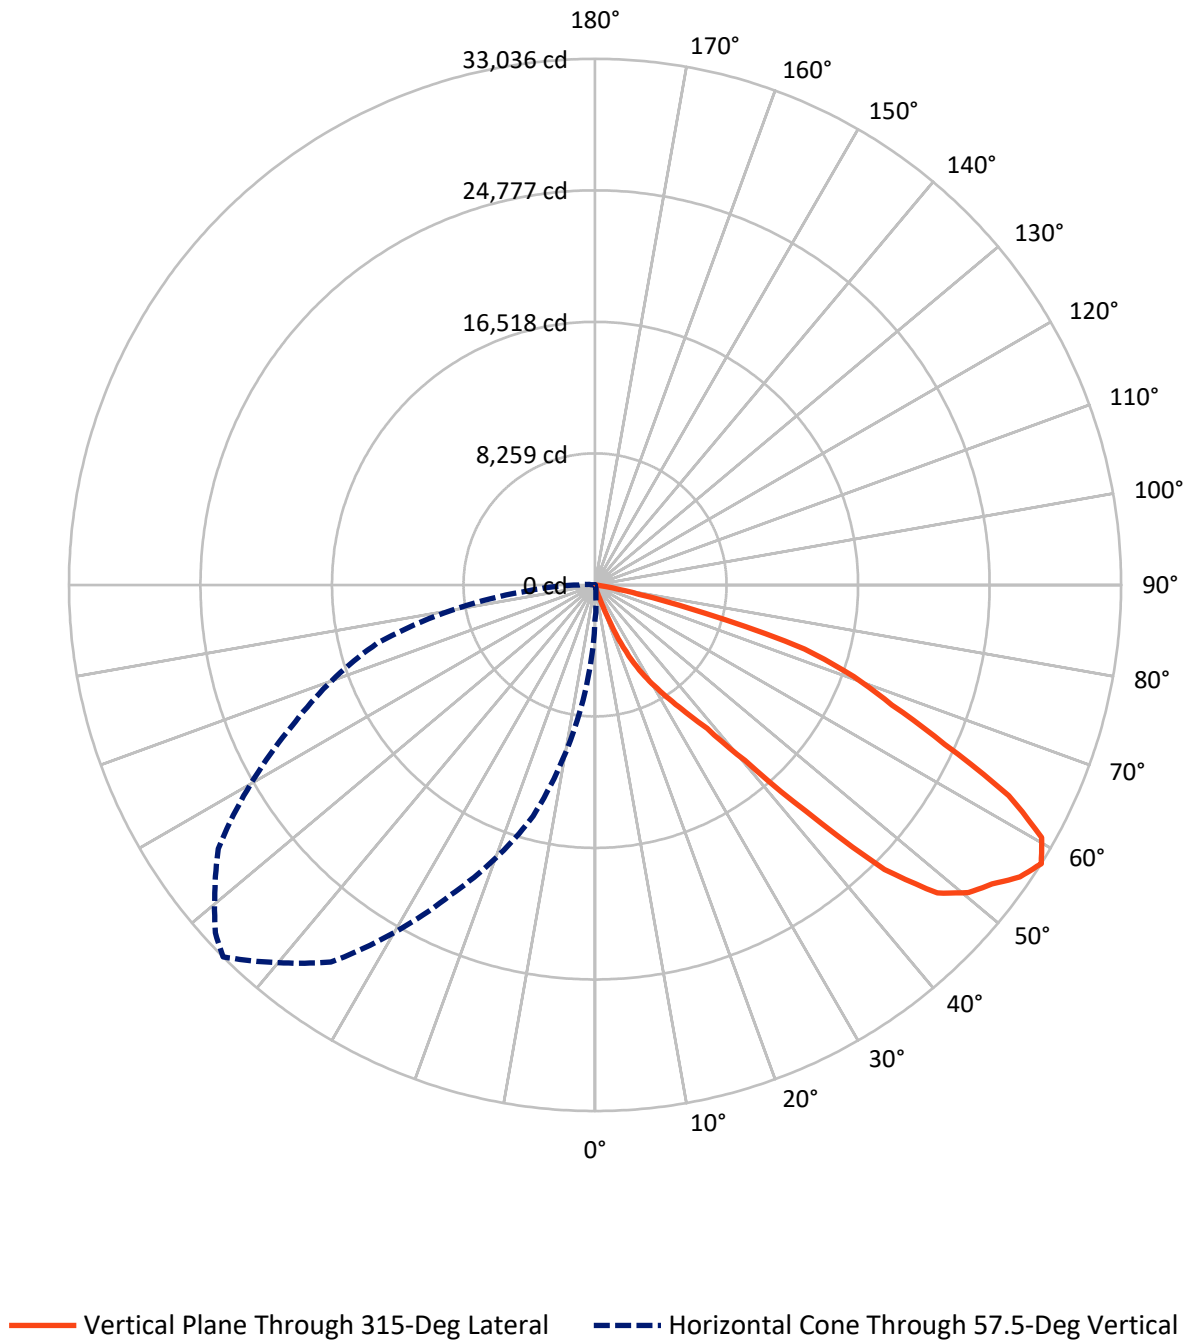

REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	64.5	0.0	64.5
	% Fixture	0.5	0.0	0.5
Street Side	Lumens	12818.6	0.0	12818.6
	% Fixture	99.5	0.0	99.5
Total	Lumens	12883.1	0.0	12883.1
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	5.0	0.0
10°-20°	28.3	0.2
20°-30°	305.3	2.4
30°-40°	902.9	7.0
40°-50°	2690.8	20.9
50°-60°	4266.6	33.1
60°-70°	3561.6	27.6
70°-80°	1098.3	8.5
80°-90°	24.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	12883.1	100.0
0°-180°	12883.1	100.0

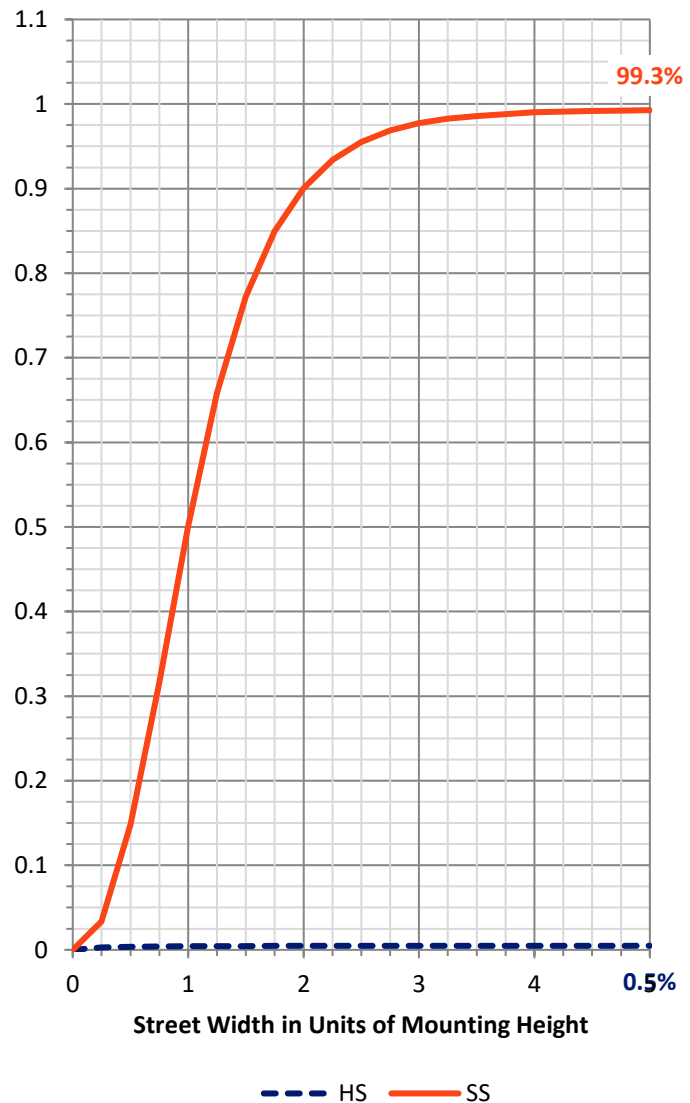

REPORT NUMBER: P1064710


CATALOG NUMBER: GLAN-SA3B-760-U-RBC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	326.8	2.5			
FM	(30°-60°)	7837.2	60.8			
FH	(60°-80°)	4635.8	36.0			G2/5000
FVH	(80°-90°)	18.9	0.1			G1/100
BL	(0°-30°)	11.8	0.1	B0/110		
BM	(30°-60°)	23.1	0.2	B0/220		
BH	(60°-80°)	24.1	0.2	B0/110		G0/110
BVH	(80°-90°)	5.5	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G2

Type III Short

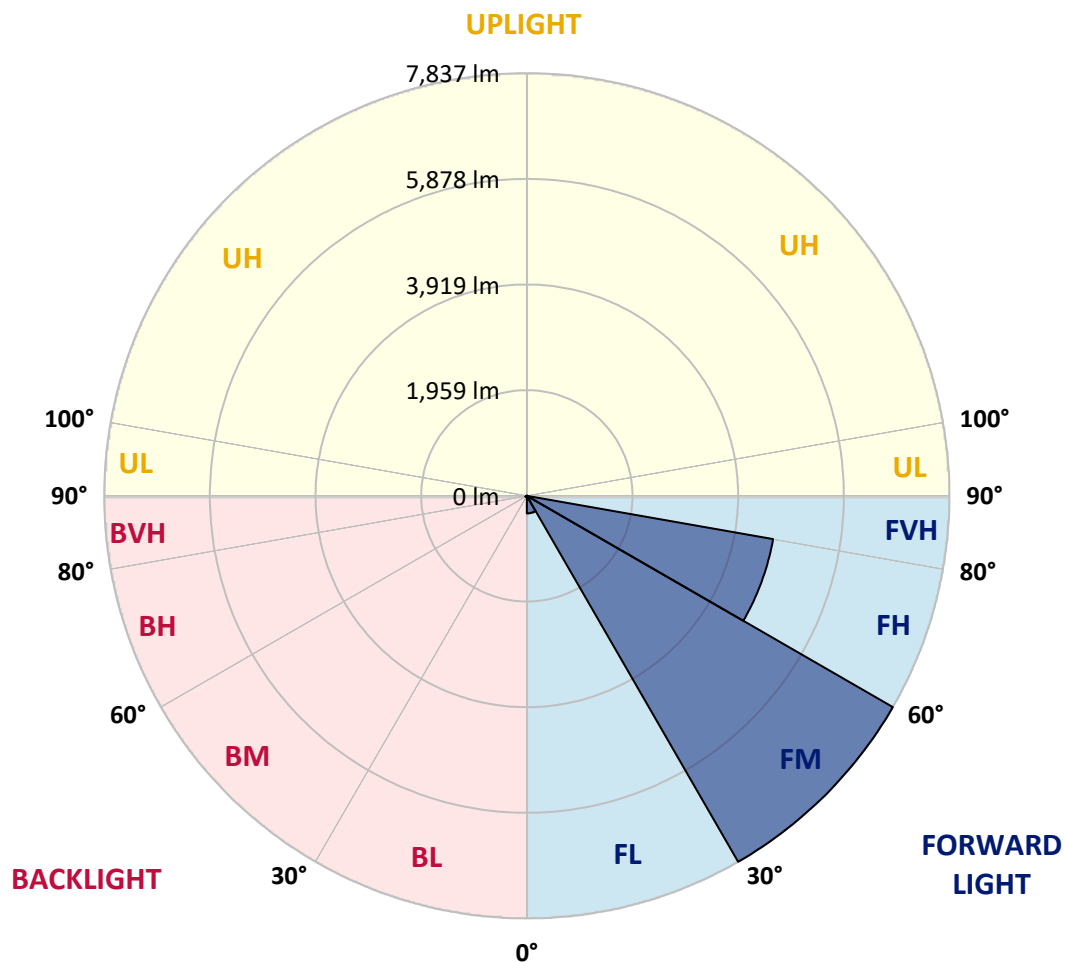



REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (FULL):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	51.6	51.6	51.6	51.6	50.6	50.6	49.7	49.7	48.7	48.7	47.7
5°	54.5	54.5	53.5	52.6	52.6	51.6	50.6	49.7	49.7	48.7	47.7
7.5°	59.4	58.4	57.4	56.5	54.5	53.5	51.6	50.6	49.7	47.7	46.7
10°	65.2	63.3	61.3	59.4	57.4	55.5	53.5	52.6	50.6	49.7	47.7
12.5°	73.0	70.1	66.2	63.3	61.3	58.4	56.5	54.5	51.6	49.7	46.7
15°	79.8	75.9	71.1	67.2	64.3	60.4	57.4	54.5	52.6	49.7	46.7
17.5°	89.6	82.8	75.0	70.1	66.2	61.3	56.5	53.5	50.6	46.7	43.8
20°	106.1	92.5	77.9	72.0	66.2	60.4	54.5	50.6	47.7	43.8	40.9
22.5°	132.4	109.0	85.7	76.9	69.1	60.4	52.6	48.7	44.8	40.9	37.0
25°	183.0	141.2	99.3	87.6	75.9	64.3	52.6	47.7	43.8	38.9	35.0
27.5°	243.4	181.1	117.8	101.3	85.7	69.1	52.6	46.7	41.9	36.0	30.2
30°	304.7	222.0	138.2	116.8	95.4	74.0	52.6	45.8	39.9	33.1	26.3
32.5°	363.1	259.9	155.8	130.5	105.1	78.9	53.5	45.8	38.0	30.2	22.4
35°	422.5	291.1	158.7	132.4	106.1	78.9	52.6	43.8	36.0	27.3	19.5
37.5°	498.5	326.1	152.8	126.6	101.3	75.0	49.7	41.9	34.1	25.3	17.5
40°	613.3	384.6	155.8	128.5	101.3	74.0	46.7	38.9	32.1	24.3	16.6
42.5°	825.6	497.5	168.4	137.3	106.1	74.0	42.8	36.0	30.2	23.4	16.6
45°	1427.2	826.6	225.9	179.1	132.4	85.7	38.9	33.1	28.2	22.4	17.5
47.5°	2360.9	1383.4	406.0	313.5	222.0	129.5	38.0	33.1	28.2	22.4	17.5
50°	3013.2	1762.2	511.1	393.3	275.5	157.7	39.9	34.1	29.2	23.4	18.5
52.5°	3008.3	1789.4	569.5	437.1	305.7	173.3	41.9	36.0	31.2	25.3	19.5
55°	2674.4	1627.8	580.2	445.9	312.5	178.2	44.8	38.9	33.1	27.3	21.4
57.5°	2235.3	1382.5	529.6	409.9	291.1	171.3	51.6	44.8	38.9	32.1	26.3
60°	1768.0	1090.4	412.8	326.1	240.5	153.8	68.1	59.4	51.6	42.8	34.1
62.5°	1220.9	790.5	360.2	289.1	219.1	148.0	77.9	69.1	61.3	52.6	43.8
65°	863.6	594.8	325.2	264.8	205.4	145.1	84.7	75.0	66.2	56.5	46.7
67.5°	645.5	473.2	299.9	248.3	196.7	145.1	93.5	81.8	71.1	59.4	47.7
70°	494.6	388.5	281.4	239.5	198.6	156.7	114.9	98.3	82.8	66.2	50.6
72.5°	403.1	332.0	259.9	229.8	199.6	169.4	139.2	117.8	96.4	74.0	52.6
75°	333.9	284.3	234.6	209.3	185.0	159.7	134.4	114.9	96.4	76.9	57.4
77.5°	222.0	202.5	182.1	167.5	152.8	137.3	122.7	106.1	90.5	74.0	57.4
80°	77.9	75.0	72.0	77.9	83.7	89.6	95.4	83.7	73.0	61.3	50.6
82.5°	11.7	10.7	9.7	10.7	11.7	12.7	13.6	14.6	15.6	16.6	17.5
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	47.7	47.7	46.7	46.7	46.7	45.8	45.8	44.8	44.8	44.8	43.8
5°	46.7	46.7	45.8	44.8	43.8	43.8	42.8	41.9	41.9	40.9	40.9
7.5°	45.8	44.8	43.8	42.8	41.9	40.9	39.9	38.9	38.9	38.0	38.0
10°	46.7	44.8	43.8	41.9	40.9	39.9	38.0	37.0	36.0	36.0	35.0
12.5°	44.8	43.8	41.9	39.9	38.9	37.0	36.0	34.1	33.1	33.1	32.1
15°	44.8	42.8	39.9	38.0	36.0	35.0	33.1	31.2	30.2	29.2	28.2
17.5°	41.9	39.9	37.0	35.0	33.1	31.2	29.2	27.3	26.3	25.3	24.3
20°	38.0	36.0	33.1	30.2	28.2	26.3	24.3	22.4	21.4	20.4	18.5
22.5°	34.1	32.1	29.2	26.3	24.3	22.4	19.5	17.5	16.6	14.6	13.6
25°	32.1	29.2	26.3	23.4	20.4	18.5	15.6	12.7	10.7	8.8	5.8
27.5°	27.3	24.3	21.4	18.5	15.6	12.7	9.7	6.8	4.9	3.9	1.9
30°	23.4	20.4	17.5	14.6	10.7	7.8	4.9	1.0	1.0	1.0	0.0
32.5°	19.5	16.6	12.7	9.7	7.8	4.9	2.9	0.0	0.0	0.0	0.0
35°	15.6	12.7	8.8	5.8	4.9	2.9	1.9	0.0	0.0	0.0	0.0
37.5°	13.6	10.7	6.8	2.9	1.9	1.9	1.0	0.0	0.0	0.0	0.0
40°	12.7	8.8	4.9	1.0	1.0	1.0	0.0	0.0	0.0	0.0	0.0
42.5°	12.7	8.8	3.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	12.7	8.8	3.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	12.7	8.8	3.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	13.6	9.7	4.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	15.6	11.7	7.8	3.9	2.9	1.9	1.0	0.0	0.0	0.0	0.0
55°	19.5	17.5	14.6	12.7	9.7	6.8	2.9	0.0	0.0	0.0	0.0
57.5°	25.3	25.3	24.3	23.4	17.5	11.7	5.8	0.0	0.0	0.0	0.0
60°	34.1	34.1	34.1	34.1	25.3	17.5	8.8	0.0	0.0	0.0	0.0
62.5°	41.9	39.9	37.0	35.0	26.3	17.5	8.8	0.0	0.0	0.0	0.0
65°	41.9	38.0	33.1	28.2	21.4	14.6	6.8	0.0	0.0	0.0	0.0
67.5°	38.9	31.2	22.4	14.6	10.7	7.8	3.9	0.0	0.0	0.0	0.0
70°	38.9	27.3	15.6	3.9	2.9	1.9	1.0	0.0	0.0	0.0	0.0
72.5°	38.9	26.3	12.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	42.8	29.2	14.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	42.8	29.2	14.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	38.0	25.3	12.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	12.7	8.8	3.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	43.8	43.8	43.8	42.8	42.8	42.8	42.8	41.9	41.9	41.9	41.9
5°	39.9	39.9	38.9	38.9	38.0	38.0	37.0	37.0	36.0	36.0	36.0
7.5°	37.0	36.0	36.0	35.0	34.1	34.1	33.1	33.1	32.1	31.2	31.2
10°	34.1	33.1	33.1	32.1	31.2	30.2	30.2	29.2	28.2	27.3	26.3
12.5°	31.2	30.2	29.2	28.2	27.3	26.3	26.3	25.3	24.3	23.4	23.4
15°	27.3	26.3	25.3	24.3	23.4	22.4	22.4	21.4	20.4	19.5	18.5
17.5°	23.4	22.4	22.4	21.4	20.4	19.5	18.5	16.6	15.6	14.6	12.7
20°	17.5	16.6	15.6	14.6	13.6	11.7	10.7	8.8	6.8	5.8	4.9
22.5°	11.7	9.7	8.8	6.8	4.9	3.9	2.9	1.0	0.0	0.0	0.0
25°	3.9	2.9	1.9	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	40.9	40.9	40.9	39.9	39.9	39.9	39.9	39.9	39.9	39.9	39.9
5°	35.0	35.0	35.0	34.1	34.1	33.1	33.1	33.1	32.1	32.1	32.1
7.5°	30.2	29.2	29.2	28.2	28.2	27.3	27.3	27.3	26.3	26.3	26.3
10°	25.3	24.3	24.3	23.4	23.4	22.4	22.4	21.4	21.4	20.4	20.4
12.5°	22.4	21.4	20.4	19.5	19.5	18.5	17.5	17.5	16.6	15.6	15.6
15°	17.5	16.6	15.6	14.6	13.6	12.7	11.7	11.7	10.7	9.7	8.8
17.5°	11.7	9.7	8.8	7.8	7.8	6.8	5.8	4.9	3.9	2.9	2.9
20°	2.9	1.9	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	39.9	38.9	38.9	38.9	39.9	39.9	39.9	39.9	39.9	39.9	39.9
5°	32.1	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2
7.5°	26.3	25.3	25.3	25.3	25.3	24.3	24.3	24.3	24.3	24.3	24.3
10°	20.4	19.5	19.5	19.5	19.5	18.5	18.5	18.5	18.5	18.5	18.5
12.5°	14.6	14.6	13.6	13.6	13.6	12.7	12.7	12.7	12.7	11.7	11.7
15°	8.8	7.8	6.8	6.8	6.8	5.8	5.8	5.8	5.8	4.9	4.9
17.5°	1.9	1.9	1.0	1.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	40.9	40.9	41.9	41.9	42.8	44.8	45.8	46.7	48.7	50.6	51.6
5°	32.1	33.1	33.1	34.1	35.0	36.0	37.0	38.0	39.9	41.9	43.8
7.5°	25.3	25.3	26.3	26.3	27.3	29.2	30.2	31.2	33.1	36.0	38.0
10°	19.5	19.5	20.4	20.4	21.4	23.4	24.3	25.3	27.3	30.2	32.1
12.5°	12.7	13.6	13.6	14.6	15.6	17.5	18.5	19.5	21.4	23.4	25.3
15°	5.8	6.8	6.8	7.8	8.8	10.7	11.7	12.7	14.6	17.5	19.5
17.5°	1.0	1.0	1.9	1.9	2.9	3.9	4.9	5.8	8.8	10.7	13.6
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.9	3.9	5.8
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	1.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	53.5	55.5	57.4	59.4	61.3	63.3	64.3	66.2	67.2	68.1	68.1
5°	45.8	47.7	50.6	52.6	54.5	56.5	58.4	59.4	60.4	61.3	62.3
7.5°	39.9	41.9	44.8	46.7	48.7	50.6	52.6	54.5	55.5	56.5	57.4
10°	34.1	37.0	38.9	41.9	43.8	45.8	47.7	49.7	51.6	52.6	54.5
12.5°	27.3	30.2	33.1	35.0	38.0	40.9	42.8	44.8	46.7	48.7	49.7
15°	21.4	24.3	27.3	29.2	32.1	35.0	38.0	39.9	41.9	43.8	45.8
17.5°	15.6	18.5	21.4	23.4	26.3	29.2	31.2	34.1	36.0	38.0	40.9
20°	7.8	10.7	13.6	16.6	19.5	22.4	24.3	27.3	29.2	31.2	33.1
22.5°	1.0	3.9	6.8	8.8	11.7	14.6	16.6	19.5	21.4	23.4	25.3
25°	0.0	1.0	2.9	3.9	4.9	6.8	8.8	10.7	12.7	14.6	17.5
27.5°	0.0	0.0	0.0	0.0	0.0	1.0	1.9	3.9	5.8	7.8	9.7
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.9	2.9
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	1.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	1.0	1.9	3.9
85°	0.0	0.0	0.0	0.0	0.0	1.9	2.9	4.9	5.8	6.8	8.8
87.5°	0.0	1.0	1.9	2.9	3.9	5.8	7.8	9.7	10.7	11.7	12.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	69.1	69.1	69.1	69.1	68.1	68.1	68.1	67.2	67.2	66.2	66.2
5°	63.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	63.3	63.3	63.3
7.5°	58.4	59.4	60.4	60.4	61.3	61.3	61.3	60.4	60.4	59.4	59.4
10°	55.5	56.5	56.5	57.4	57.4	57.4	57.4	57.4	57.4	57.4	57.4
12.5°	51.6	52.6	53.5	53.5	54.5	54.5	54.5	54.5	53.5	53.5	53.5
15°	46.7	48.7	49.7	50.6	50.6	51.6	51.6	51.6	51.6	51.6	51.6
17.5°	42.8	44.8	45.8	46.7	46.7	47.7	47.7	48.7	48.7	48.7	48.7
20°	35.0	37.0	38.0	39.9	40.9	41.9	42.8	43.8	43.8	44.8	43.8
22.5°	27.3	29.2	30.2	32.1	33.1	34.1	35.0	36.0	37.0	38.0	38.0
25°	19.5	21.4	22.4	24.3	25.3	26.3	27.3	28.2	28.2	29.2	30.2
27.5°	10.7	12.7	14.6	15.6	17.5	18.5	19.5	20.4	21.4	22.4	23.4
30°	4.9	5.8	6.8	8.8	9.7	10.7	11.7	13.6	14.6	15.6	16.6
32.5°	0.0	0.0	1.0	2.9	3.9	4.9	5.8	6.8	6.8	7.8	9.7
35°	0.0	0.0	0.0	0.0	0.0	0.0	1.0	1.9	2.9	3.9	5.8
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.9
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.9
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	1.9	1.9	1.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
82.5°	4.9	5.8	6.8	6.8	7.8	7.8	7.8	7.8	6.8	6.8	6.8
85°	9.7	10.7	11.7	11.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7
87.5°	13.6	14.6	15.6	15.6	16.6	16.6	16.6	16.6	16.6	16.6	16.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	65.2	65.2	64.3	64.3	64.3	64.3	64.3	65.2	66.2	66.2	67.2
5°	62.3	62.3	61.3	61.3	61.3	62.3	62.3	63.3	64.3	65.2	66.2
7.5°	59.4	58.4	58.4	59.4	59.4	60.4	60.4	61.3	62.3	63.3	64.3
10°	57.4	56.5	56.5	56.5	57.4	57.4	58.4	59.4	60.4	61.3	62.3
12.5°	53.5	53.5	53.5	53.5	54.5	54.5	55.5	56.5	58.4	59.4	60.4
15°	51.6	50.6	50.6	50.6	50.6	51.6	51.6	53.5	55.5	56.5	58.4
17.5°	47.7	47.7	46.7	46.7	47.7	47.7	48.7	50.6	52.6	53.5	55.5
20°	43.8	42.8	41.9	41.9	42.8	42.8	43.8	45.8	47.7	48.7	50.6
22.5°	38.0	37.0	37.0	37.0	37.0	38.0	38.0	39.9	42.8	44.8	46.7
25°	30.2	31.2	31.2	32.1	32.1	33.1	34.1	36.0	38.9	40.9	42.8
27.5°	23.4	24.3	24.3	26.3	27.3	28.2	29.2	32.1	35.0	37.0	39.9
30°	17.5	18.5	19.5	20.4	22.4	24.3	26.3	29.2	32.1	34.1	37.0
32.5°	10.7	12.7	13.6	15.6	17.5	19.5	21.4	24.3	28.2	31.2	34.1
35°	7.8	8.8	10.7	11.7	13.6	15.6	17.5	21.4	24.3	28.2	31.2
37.5°	3.9	5.8	7.8	9.7	11.7	13.6	15.6	19.5	23.4	26.3	30.2
40°	2.9	4.9	5.8	7.8	10.7	12.7	14.6	18.5	22.4	26.3	30.2
42.5°	1.9	2.9	3.9	6.8	8.8	11.7	14.6	18.5	22.4	26.3	30.2
45°	1.9	1.9	2.9	5.8	8.8	12.7	15.6	19.5	22.4	26.3	29.2
47.5°	1.9	2.9	3.9	7.8	9.7	12.7	15.6	18.5	22.4	25.3	28.2
50°	2.9	3.9	4.9	8.8	10.7	13.6	15.6	19.5	22.4	26.3	29.2
52.5°	1.9	2.9	3.9	7.8	10.7	14.6	17.5	21.4	25.3	28.2	32.1
55°	1.0	1.0	1.0	5.8	11.7	16.6	22.4	25.3	29.2	32.1	35.0
57.5°	0.0	0.0	0.0	3.9	11.7	18.5	25.3	29.2	33.1	36.0	39.9
60°	0.0	0.0	0.0	3.9	11.7	18.5	25.3	30.2	35.0	39.9	44.8
62.5°	0.0	0.0	0.0	3.9	9.7	15.6	21.4	29.2	38.0	45.8	53.5
65°	0.0	0.0	0.0	2.9	7.8	12.7	17.5	29.2	40.9	51.6	63.3
67.5°	0.0	0.0	0.0	2.9	7.8	11.7	16.6	29.2	40.9	53.5	65.2
70°	0.0	0.0	0.0	2.9	7.8	12.7	17.5	29.2	40.9	52.6	64.3
72.5°	0.0	0.0	0.0	2.9	8.8	13.6	19.5	29.2	38.9	48.7	58.4
75°	0.0	0.0	0.0	3.9	8.8	14.6	20.4	29.2	38.0	45.8	54.5
77.5°	0.0	0.0	0.0	2.9	8.8	13.6	19.5	28.2	37.0	44.8	53.5
80°	2.9	1.9	1.9	4.9	8.8	12.7	16.6	25.3	35.0	43.8	52.6
82.5°	5.8	5.8	4.9	6.8	8.8	11.7	14.6	22.4	31.2	38.9	46.7
85°	11.7	11.7	10.7	11.7	11.7	12.7	13.6	17.5	21.4	25.3	29.2
87.5°	15.6	15.6	14.6	14.6	14.6	13.6	13.6	13.6	13.6	12.7	12.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	68.1	69.1	69.1	70.1	71.1	72.0	72.0	73.0	73.0	73.0	73.0
5°	67.2	69.1	70.1	71.1	72.0	73.0	74.0	75.0	75.9	75.9	75.9
7.5°	66.2	67.2	69.1	70.1	72.0	73.0	75.0	75.9	76.9	77.9	78.9
10°	64.3	66.2	68.1	70.1	72.0	74.0	75.9	77.9	79.8	80.8	82.8
12.5°	62.3	65.2	67.2	69.1	72.0	75.0	76.9	79.8	81.8	83.7	86.6
15°	61.3	63.3	66.2	68.1	72.0	75.9	78.9	82.8	86.6	89.6	94.4
17.5°	58.4	62.3	65.2	68.1	72.0	76.9	80.8	84.7	90.5	96.4	104.2
20°	54.5	57.4	61.3	64.3	70.1	75.0	80.8	85.7	94.4	103.2	119.7
22.5°	50.6	54.5	57.4	61.3	68.1	74.0	80.8	86.6	101.3	114.9	152.8
25°	46.7	51.6	55.5	59.4	67.2	75.0	82.8	90.5	114.9	139.2	207.4
27.5°	44.8	48.7	53.5	57.4	67.2	77.9	87.6	97.4	136.3	174.3	288.2
30°	41.9	46.7	50.6	55.5	68.1	80.8	93.5	106.1	165.5	224.9	390.4
32.5°	38.9	43.8	48.7	53.5	70.1	86.6	102.2	118.8	196.7	273.6	487.8
35°	36.0	41.9	46.7	51.6	73.0	95.4	116.8	138.2	224.9	310.6	554.0
37.5°	35.0	40.9	45.8	50.6	74.0	96.4	119.7	142.1	227.8	313.5	603.6
40°	36.0	40.9	46.7	51.6	71.1	90.5	109.0	128.5	218.1	306.7	653.3
42.5°	36.0	41.9	47.7	53.5	69.1	84.7	100.3	115.9	215.2	314.5	750.6
45°	35.0	40.9	46.7	52.6	67.2	80.8	95.4	109.0	232.7	355.4	945.3
47.5°	34.1	39.9	45.8	51.6	66.2	80.8	95.4	110.0	300.8	490.7	1440.9
50°	34.1	39.9	44.8	49.7	67.2	85.7	103.2	120.7	438.1	754.5	2207.1
52.5°	36.0	40.9	44.8	48.7	69.1	90.5	111.0	131.4	556.9	981.4	2778.6
55°	38.9	41.9	45.8	48.7	74.0	98.3	123.6	148.0	592.9	1037.8	2841.8
57.5°	42.8	45.8	48.7	51.6	82.8	113.9	144.1	175.2	595.8	1015.4	2564.4
60°	47.7	51.6	54.5	57.4	90.5	124.6	157.7	190.8	539.4	886.9	2192.5
62.5°	58.4	63.3	67.2	72.0	104.2	135.3	167.5	198.6	447.8	697.1	1713.5
65°	67.2	71.1	75.0	78.9	110.0	142.1	173.3	204.4	379.7	554.9	1294.8
67.5°	69.1	73.0	75.9	79.8	112.0	144.1	175.2	207.4	325.2	442.0	956.0
70°	70.1	75.0	80.8	85.7	118.8	151.9	184.0	217.1	288.2	359.2	676.6
72.5°	67.2	76.9	85.7	94.4	125.6	155.8	186.9	217.1	267.7	318.4	503.3
75°	67.2	80.8	93.5	106.1	129.5	151.9	175.2	197.6	236.6	275.5	366.1
77.5°	71.1	88.6	106.1	123.6	137.3	149.9	163.6	176.2	201.5	226.8	275.5
80°	71.1	89.6	107.1	125.6	131.4	138.2	144.1	149.9	152.8	155.8	154.8
82.5°	61.3	75.9	90.5	105.1	98.3	91.5	84.7	77.9	73.0	67.2	70.1
85°	31.2	34.1	36.0	38.0	35.0	32.1	29.2	26.3	24.3	21.4	20.4
87.5°	12.7	12.7	11.7	11.7	11.7	11.7	10.7	10.7	10.7	10.7	9.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	73.0	72.0	72.0	71.1	70.1	69.1	68.1	67.2	66.2	65.2	64.3
5°	75.9	75.9	75.9	75.0	75.0	74.0	74.0	73.0	72.0	71.1	70.1
7.5°	78.9	79.8	79.8	80.8	80.8	80.8	80.8	79.8	79.8	79.8	78.9
10°	83.7	84.7	85.7	86.6	87.6	88.6	88.6	89.6	89.6	89.6	90.5
12.5°	89.6	92.5	94.4	97.4	99.3	102.2	104.2	107.1	109.0	111.0	112.0
15°	98.3	103.2	109.0	113.9	118.8	125.6	133.4	140.2	147.0	157.7	169.4
17.5°	111.0	126.6	142.1	156.7	172.3	206.4	240.5	273.6	307.6	357.3	406.0
20°	135.3	182.1	227.8	274.5	320.3	440.1	558.8	678.6	797.4	924.9	1053.4
22.5°	189.8	304.7	419.6	534.5	649.4	899.6	1148.8	1399.0	1648.2	1941.3	2234.3
25°	275.5	486.8	698.0	908.3	1119.6	1511.0	1903.3	2294.7	2686.1	3066.7	3447.4
27.5°	401.1	724.3	1047.6	1369.8	1693.0	2223.6	2755.2	3285.8	3816.4	4246.7	4677.0
30°	555.9	994.0	1432.1	1870.2	2308.3	2911.9	3515.5	4118.2	4721.8	5192.0	5663.2
32.5°	701.9	1238.4	1774.8	2310.3	2846.7	3534.0	4222.4	4909.7	5597.0	6111.1	6626.1
35°	797.4	1445.7	2095.1	2743.5	3391.9	4135.7	4879.5	5622.3	6366.1	6953.2	7540.3
37.5°	892.8	1641.4	2389.1	3137.8	3885.5	4702.3	5519.1	6336.0	7152.8	7878.1	8604.4
40°	999.9	1878.0	2755.2	3633.3	4510.5	5478.3	6445.0	7412.7	8379.5	9402.7	10425.9
42.5°	1185.8	2270.4	3355.9	4440.4	5525.0	6805.2	8085.5	9364.7	10645.0	12105.3	13565.7
45°	1535.3	3063.8	4593.3	6121.8	7650.3	9346.2	11043.2	12739.1	14435.1	16378.3	18321.5
47.5°	2391.1	4494.0	6595.9	8698.8	10800.7	12632.0	14462.3	16293.6	18123.9	20059.4	21994.8
50°	3658.7	6106.2	8553.8	11000.3	13447.9	15104.9	16760.9	18417.9	20074.0	21915.0	23756.0
52.5°	4575.8	7125.5	9676.3	12226.0	14775.8	16271.2	17767.6	19263.0	20758.4	22478.7	24199.0
55°	4644.9	7180.0	9716.2	12251.4	14786.5	16288.7	17790.9	19293.2	20795.4	22618.9	24443.3
57.5°	4112.3	6627.1	9140.8	11655.5	14169.3	15879.8	17589.4	19300.0	21009.6	22981.0	24952.5
60°	3498.0	6013.7	8528.4	11044.1	13558.9	15529.3	17500.8	19471.3	21441.8	23288.7	25134.6
62.5°	2728.9	5316.6	7905.4	10493.1	13080.8	15081.5	17082.2	19081.9	21082.6	22468.0	23854.3
65°	2033.8	4546.6	7059.3	9571.1	12083.9	13686.4	15288.9	16890.4	18492.9	19350.6	20209.3
67.5°	1470.1	3637.2	5803.4	7970.6	10136.8	11283.6	12430.5	13576.4	14723.2	15379.4	16036.6
70°	994.0	2495.2	3995.5	5496.8	6997.0	7939.4	8882.8	9825.2	10767.6	11653.6	12538.6
72.5°	688.3	1531.4	2375.5	3218.6	4061.7	5010.0	5957.2	6905.5	7852.8	8790.3	9727.9
75°	456.6	840.2	1224.7	1608.3	1991.9	2693.9	3396.8	4098.7	4800.7	5359.5	5918.3
77.5°	324.2	439.1	554.9	669.8	784.7	916.1	1048.5	1180.0	1311.4	1511.0	1710.6
80°	153.8	168.4	183.0	196.7	211.3	259.0	306.7	354.4	402.1	452.7	503.3
82.5°	73.0	78.9	84.7	89.6	95.4	100.3	105.1	110.0	114.9	110.0	104.2
85°	19.5	19.5	20.4	20.4	20.4	20.4	20.4	20.4	20.4	19.5	18.5
87.5°	8.8	8.8	8.8	8.8	8.8	8.8	8.8	7.8	7.8	6.8	6.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	63.3	62.3	61.3	60.4	59.4	57.4	57.4	56.5	56.5	55.5	55.5
5°	69.1	68.1	67.2	66.2	66.2	65.2	64.3	64.3	63.3	62.3	62.3
7.5°	78.9	77.9	76.9	75.9	75.9	75.0	75.0	74.0	74.0	73.0	72.0
10°	90.5	90.5	90.5	90.5	90.5	89.6	89.6	89.6	88.6	88.6	87.6
12.5°	113.9	114.9	116.8	118.8	121.7	121.7	121.7	120.7	120.7	119.7	116.8
15°	180.1	190.8	198.6	206.4	213.2	228.8	226.8	223.9	222.0	219.1	208.3
17.5°	455.6	504.3	530.6	555.9	582.2	654.2	642.6	630.9	620.2	608.5	556.9
20°	1180.9	1308.5	1393.2	1477.9	1563.5	1698.9	1665.8	1632.7	1599.6	1566.5	1426.3
22.5°	2526.4	2819.4	2947.0	3074.5	3201.1	3364.6	3258.5	3152.4	3047.3	2941.1	2681.2
25°	3827.1	4207.8	4422.9	4638.1	4852.3	4945.7	4807.5	4668.2	4530.0	4390.8	4063.7
27.5°	5107.3	5537.6	5727.5	5916.4	6106.2	6301.9	6130.5	5958.2	5786.9	5615.5	5238.8
30°	6133.5	6603.7	6809.1	7013.6	7219.0	7355.3	7178.1	6999.9	6822.7	6645.6	6240.6
32.5°	7140.1	7654.2	7879.1	8104.0	8327.9	8523.6	8305.5	8086.4	7868.4	7650.3	7165.4
35°	8126.4	8713.4	9023.0	9332.6	9642.2	9824.3	9565.3	9305.3	9046.4	8787.4	8221.8
37.5°	9329.7	10055.0	10401.6	10748.2	11094.8	11426.7	11141.5	10855.3	10570.0	10283.8	9588.7
40°	11449.1	12472.4	13003.9	13536.5	14068.0	14496.4	14136.2	13776.0	13415.7	13055.5	12159.8
42.5°	15026.0	16486.4	17250.6	18013.9	18778.1	19447.0	19068.3	18689.5	18310.8	17932.1	16722.0
45°	20264.8	22208.0	23139.7	24070.4	25002.1	25490.9	24945.7	24399.5	23854.3	23309.1	21807.9
47.5°	23929.3	25864.7	26694.2	27523.7	28353.2	28911.0	28244.1	27577.2	26911.3	26244.4	24623.4
50°	25596.0	27437.0	28269.4	29100.9	29933.3	30376.2	29606.1	28835.1	28065.0	27294.9	25644.7
52.5°	25918.3	27638.6	28631.6	29625.6	30618.6	31210.6	30301.3	29391.0	28481.7	27571.4	25888.1
55°	26266.8	28090.3	29242.0	30394.7	31546.5	32366.2	31338.1	30309.1	29281.0	28251.9	26445.9
57.5°	26923.0	28894.5	30043.3	31191.1	32339.9	33036.0	32005.0	30973.0	29942.0	28911.0	27059.3
60°	26981.4	28827.3	29814.5	30802.7	31789.8	32228.0	31241.7	30254.5	29268.3	28282.1	26669.9
62.5°	25239.7	26625.1	27310.5	27995.9	28681.3	29157.3	28128.3	27098.2	26069.2	25039.1	23756.0
65°	21067.0	21924.7	22470.9	23017.0	23563.2	24130.8	23188.4	22246.0	21303.6	20361.2	19424.6
67.5°	16692.8	17348.9	18068.4	18787.9	19507.3	20113.9	19359.4	18603.9	17849.4	17094.8	16039.5
70°	13424.5	14309.5	15118.5	15927.5	16736.6	17233.1	16475.7	15717.2	14959.8	14201.4	13052.6
72.5°	10665.4	11603.0	12278.6	12953.3	13628.9	13750.6	13193.8	12636.9	12081.0	11524.1	10489.2
75°	6476.2	7035.0	7048.6	7061.3	7074.9	7190.8	6729.3	6267.8	5807.3	5345.9	4932.1
77.5°	1910.1	2109.7	2274.2	2437.8	2602.3	2800.9	2631.5	2461.2	2291.8	2122.4	1898.5
80°	553.0	603.6	646.4	688.3	731.1	705.8	665.9	626.0	586.1	546.2	489.7
82.5°	99.3	93.5	92.5	91.5	91.5	86.6	78.9	71.1	63.3	55.5	52.6
85°	17.5	16.6	15.6	14.6	13.6	12.7	10.7	9.7	7.8	5.8	4.9
87.5°	5.8	4.9	3.9	2.9	2.9	1.0	1.0	1.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710

CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
0°	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
2.5°	55.5	54.5	54.5	54.5	54.5	53.5	53.5	53.5	53.5	52.6	52.6
5°	61.3	61.3	60.4	60.4	59.4	59.4	58.4	58.4	57.4	57.4	56.5
7.5°	72.0	71.1	70.1	69.1	68.1	66.2	65.2	64.3	64.3	63.3	62.3
10°	86.6	84.7	83.7	81.8	80.8	78.9	76.9	75.0	73.0	71.1	69.1
12.5°	113.9	110.0	107.1	103.2	99.3	96.4	92.5	89.6	85.7	82.8	78.9
15°	197.6	187.9	177.2	164.5	150.9	138.2	124.6	116.8	108.1	100.3	91.5
17.5°	505.3	454.7	403.1	361.2	319.3	278.4	236.6	206.4	176.2	145.1	114.9
20°	1286.1	1145.9	1005.7	867.4	728.2	590.0	450.8	380.7	310.6	240.5	170.4
22.5°	2420.3	2160.3	1899.4	1647.3	1394.1	1142.0	889.8	731.1	573.4	414.7	256.0
25°	3735.6	3408.5	3081.3	2666.6	2250.9	1836.1	1421.4	1163.4	905.4	647.4	389.4
27.5°	4861.0	4484.2	4107.5	3603.2	3098.9	2594.6	2090.2	1705.7	1322.1	937.5	553.0
30°	5835.6	5430.6	5025.5	4438.5	3851.4	3264.4	2677.3	2196.4	1715.4	1234.5	753.5
32.5°	6680.6	6195.8	5710.9	5105.4	4499.8	3894.3	3288.7	2698.7	2108.7	1517.8	927.8
35°	7655.1	7089.5	6522.9	5851.1	5178.4	4506.6	3834.9	3169.0	2502.1	1836.1	1169.3
37.5°	8893.5	8199.4	7504.2	6755.6	6006.9	5259.2	4510.5	3749.2	2987.9	2226.5	1465.2
40°	11264.2	10368.5	9472.8	8521.6	7569.5	6618.3	5667.1	4732.5	3797.9	2862.3	1927.7
42.5°	15511.8	14301.7	13091.5	11825.9	10559.3	9293.7	8027.1	6708.8	5389.7	4071.5	2752.3
45°	20305.7	18804.4	17302.2	15881.8	14460.4	13039.9	11619.5	9810.6	8001.7	6192.9	4384.0
47.5°	23001.5	21380.5	19759.5	18415.0	17070.5	15726.0	14381.5	12431.5	10481.4	8531.4	6581.3
50°	23993.5	22343.3	20693.1	19455.7	18217.4	16980.0	15741.6	13788.6	11834.7	9881.7	7927.7
52.5°	24204.8	22521.5	20838.2	19593.0	18347.8	17103.6	15858.4	13918.1	11977.8	10036.5	8096.2
55°	24639.0	22833.0	21026.1	19606.6	18187.2	16767.7	15348.3	13376.8	11405.3	9433.9	7462.4
57.5°	25206.6	23354.9	21503.2	19886.1	18269.0	16652.8	15035.8	12880.3	10724.8	8568.4	6412.9
60°	25057.6	23446.4	21834.2	20102.2	18369.2	16637.3	14904.3	12533.7	10162.1	7791.4	5419.8
62.5°	22471.8	21188.7	19904.6	18480.2	17054.9	15630.6	14206.3	11765.5	9324.8	6884.1	4443.4
65°	18487.0	17550.5	16613.9	15468.0	14321.2	13175.3	12029.4	9840.8	7653.2	5464.6	3276.0
67.5°	14983.2	13927.8	12871.5	11958.3	11044.1	10130.9	9216.7	7494.5	5772.3	4050.0	2327.8
70°	11903.8	10756.0	9607.1	8715.4	7822.6	6930.8	6039.0	4894.1	3750.2	2605.3	1460.3
72.5°	9453.3	8418.4	7383.5	6432.4	5480.2	4529.0	3576.9	2900.3	2223.6	1547.0	870.4
75°	4518.3	4104.6	3690.8	3193.3	2695.8	2198.3	1700.8	1405.8	1111.8	816.8	521.8
77.5°	1674.5	1451.6	1227.7	1025.2	822.7	621.1	418.6	383.6	348.5	313.5	278.4
80°	433.2	377.7	321.3	281.4	240.5	200.6	160.6	145.1	130.5	114.9	99.3
82.5°	49.7	45.8	42.8	40.9	38.0	36.0	33.1	30.2	27.3	23.4	20.4
85°	2.9	1.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064710
 CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	357.5°	360°
0°	56.5	56.5
2.5°	52.6	51.6
5°	55.5	54.5
7.5°	61.3	59.4
10°	67.2	65.2
12.5°	75.9	73.0
15°	85.7	79.8
17.5°	102.2	89.6
20°	138.2	106.1
22.5°	194.7	132.4
25°	286.2	183.0
27.5°	398.2	243.4
30°	529.6	304.7
32.5°	645.5	363.1
35°	796.4	422.5
37.5°	982.3	498.5
40°	1270.5	613.3
42.5°	1789.4	825.6
45°	2906.1	1427.2
47.5°	4471.6	2360.9
50°	5470.5	3013.2
52.5°	5552.2	3008.3
55°	5068.4	2674.4
57.5°	4324.6	2235.3
60°	3594.4	1768.0
62.5°	2832.1	1220.9
65°	2069.8	863.6
67.5°	1486.6	645.5
70°	977.5	494.6
72.5°	636.7	403.1
75°	428.4	333.9
77.5°	250.2	222.0
80°	88.6	77.9
82.5°	16.6	11.7
85°	0.0	0.0
87.5°	0.0	0.0
90°	0.0	0.0
92.5°	0.0	0.0
95°	0.0	0.0
97.5°	0.0	0.0
100°	0.0	0.0
102.5°	0.0	0.0
105°	0.0	0.0
107.5°	0.0	0.0
110°	0.0	0.0



REPORT NUMBER: P1064710
CATALOG NUMBER: GLAN-SA3B-760-U-RBC

CANDELA DISTRIBUTION (continued):

	357.5°	360°
112.5°	0.0	0.0
115°	0.0	0.0
117.5°	0.0	0.0
120°	0.0	0.0
122.5°	0.0	0.0
125°	0.0	0.0
127.5°	0.0	0.0
130°	0.0	0.0
132.5°	0.0	0.0
135°	0.0	0.0
137.5°	0.0	0.0
140°	0.0	0.0
142.5°	0.0	0.0
145°	0.0	0.0
147.5°	0.0	0.0
150°	0.0	0.0
152.5°	0.0	0.0
155°	0.0	0.0
157.5°	0.0	0.0
160°	0.0	0.0
162.5°	0.0	0.0
165°	0.0	0.0
167.5°	0.0	0.0
170°	0.0	0.0
172.5°	0.0	0.0
175°	0.0	0.0
177.5°	0.0	0.0
180°	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-7

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-757-U-5WQ


Data in this report applies to families of products including GSS-SB1A-757-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-7
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-757-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI
 5700K CCT 26 LEDS

Spectral Parameters

CCT (K):	5571	CRI (Ra):	69.9		
CIE u':	0.2033	R1:	68.8	R9:	-35.4
CIE v':	0.4806	R2:	72.5	R10:	36.7
Duv:	0.0041	R3:	76.8	R11:	73.9
CIE x:	0.3308	R4:	72.0	R12:	47.8
CIE y:	0.3476	R5:	70.9	R13:	68.0
CIE z:	0.3216	R6:	65.6	R14:	87.0
Peak Wavelength (nm):	442	R7:	75.5	R15:	59.8
Dominant Wavelength (nm):	544	R8:	56.8		
Purity:	3.635698				
Rf:	70.4				
Rg:	97.1				

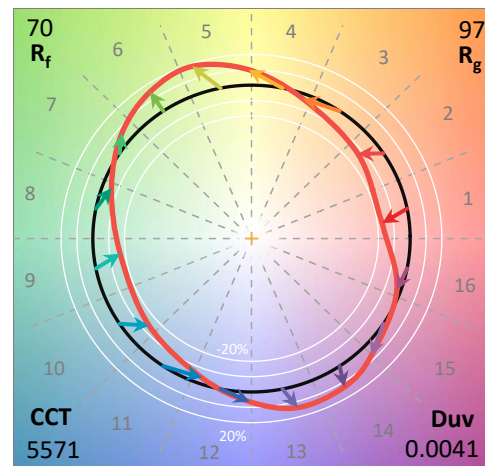

Test Conditions


Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-7

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-7

Photopic Flux vs. Wavelength

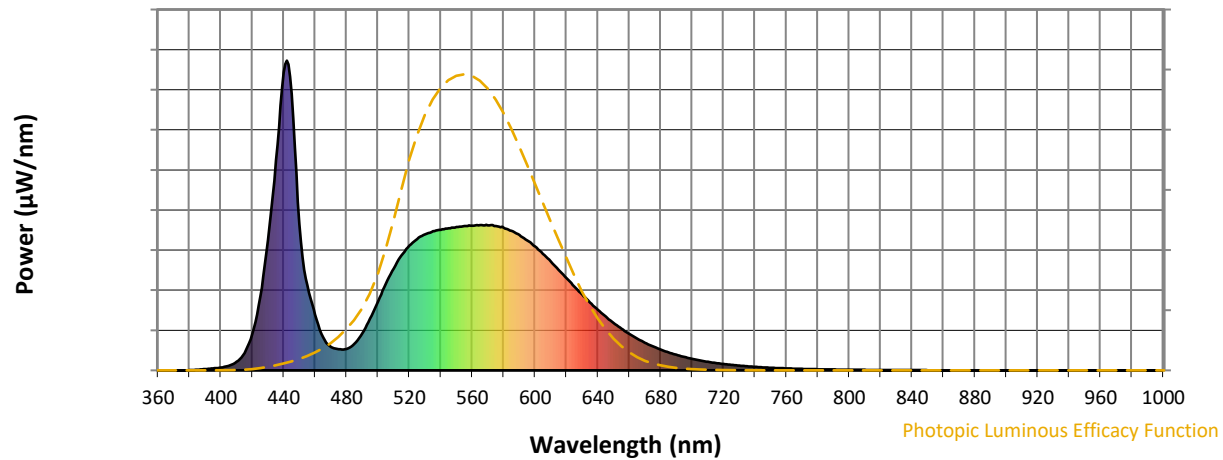


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Scotopic Flux vs. Wavelength

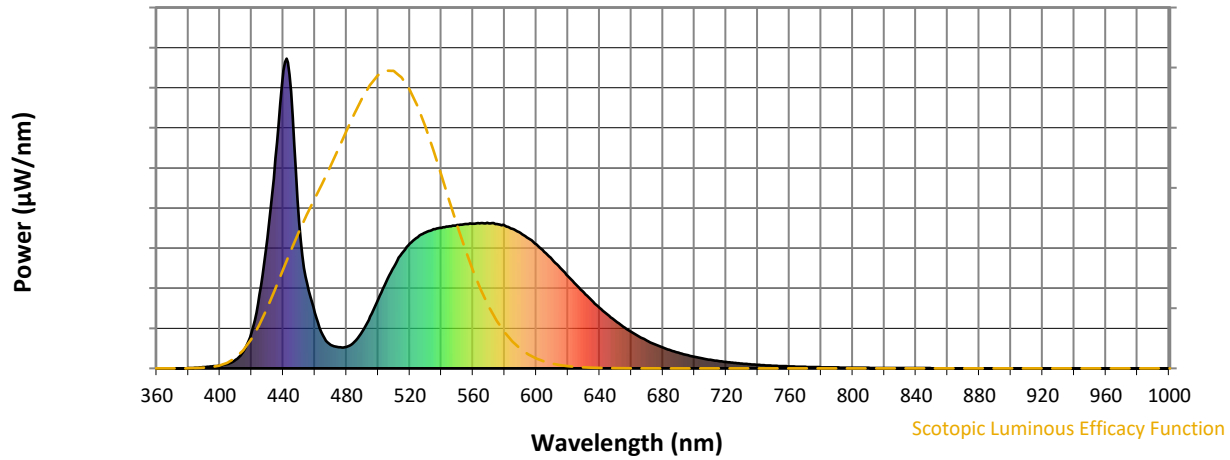


Scotopic Lumens: NR

S/P: 1.84

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Melanopic Flux vs. Wavelength

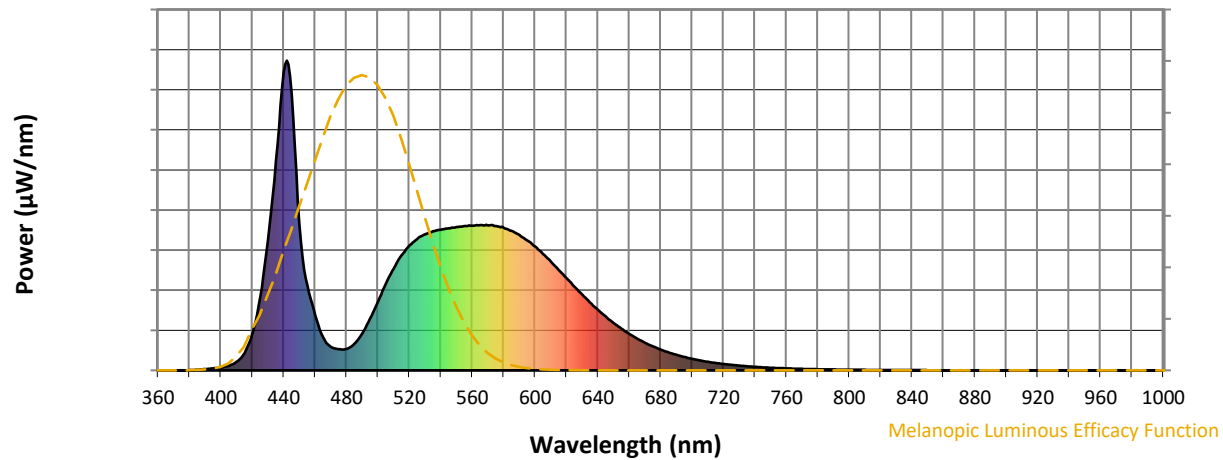

Melanopic Lumens: NR

M/P: 3.71


λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7





TM-30-18

Summary

$R_f = 70.4$
 $R_g = 97.1$
 $CIE R_a = 69.9$
 $R_g = -35.4$

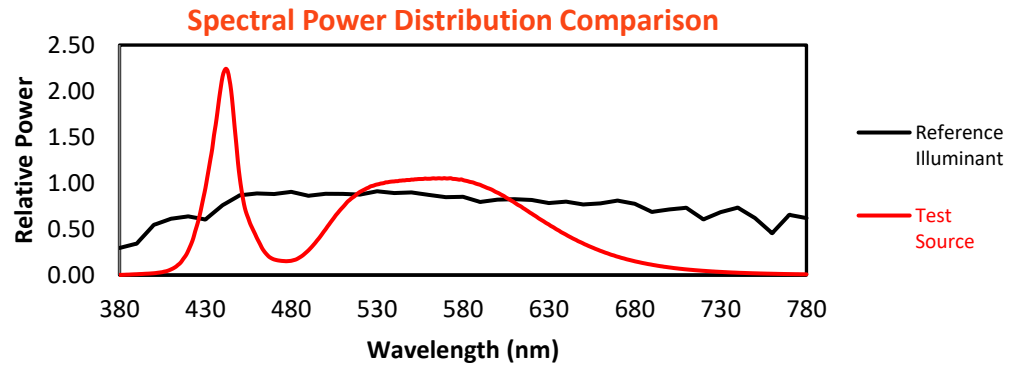





Color Vector Graphics

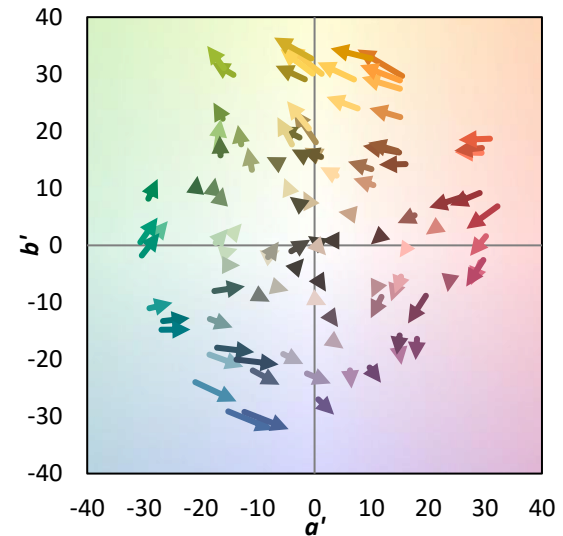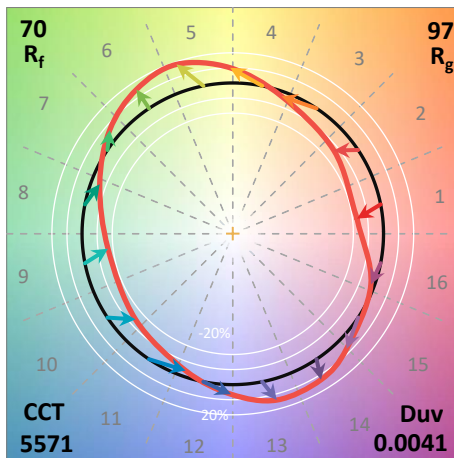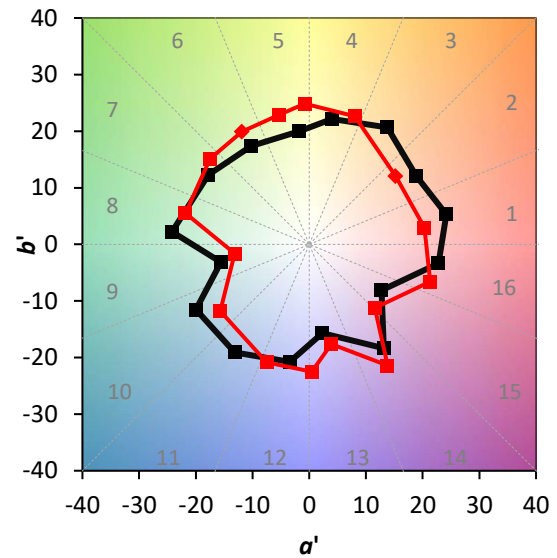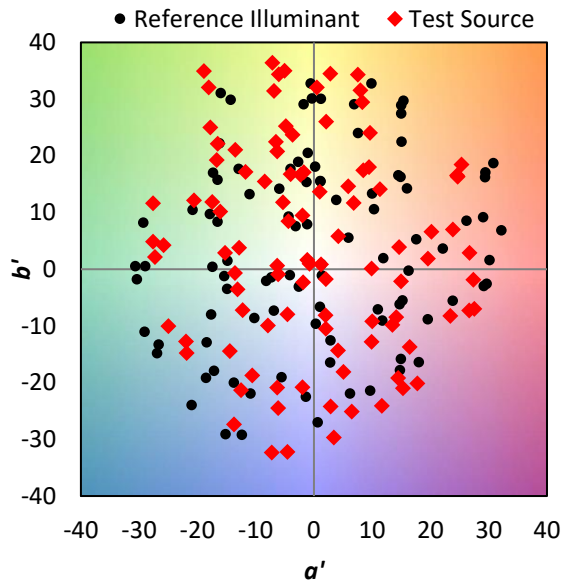


Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 85	CES26 = 52	CES51 = 87	CES76 = 40
CES02 = 59	CES27 = 77	CES52 = 88	CES77 = 62
CES03 = 30	CES28 = 76	CES53 = 74	CES78 = 43
CES04 = 68	CES29 = 46	CES54 = 79	CES79 = 72
CES05 = 45	CES30 = 54	CES55 = 78	CES80 = 68
CES06 = 49	CES31 = 52	CES56 = 67	CES81 = 70
CES07 = 38	CES32 = 49	CES57 = 64	CES82 = 87
CES08 = 37	CES33 = 59	CES58 = 66	CES83 = 81
CES09 = 29	CES34 = 61	CES59 = 87	CES84 = 87
CES10 = 72	CES35 = 78	CES60 = 91	CES85 = 83
CES11 = 55	CES36 = 88	CES61 = 88	CES86 = 75
CES12 = 61	CES37 = 71	CES62 = 77	CES87 = 74
CES13 = 41	CES38 = 64	CES63 = 74	CES88 = 76
CES14 = 74	CES39 = 90	CES64 = 71	CES89 = 75
CES15 = 70	CES40 = 81	CES65 = 63	CES90 = 73
CES16 = 46	CES41 = 82	CES66 = 66	CES91 = 93
CES17 = 48	CES42 = 69	CES67 = 63	CES92 = 69
CES18 = 55	CES43 = 67	CES68 = 71	CES93 = 82
CES19 = 70	CES44 = 98	CES69 = 81	CES94 = 58
CES20 = 63	CES45 = 77	CES70 = 57	CES95 = 72
CES21 = 85	CES46 = 76	CES71 = 54	CES96 = 78
CES22 = 77	CES47 = 73	CES72 = 84	CES97 = 82
CES23 = 91	CES48 = 65	CES73 = 45	CES98 = 70
CES24 = 90	CES49 = 77	CES74 = 92	CES99 = 59
CES25 = 71	CES50 = 85	CES75 = 49	

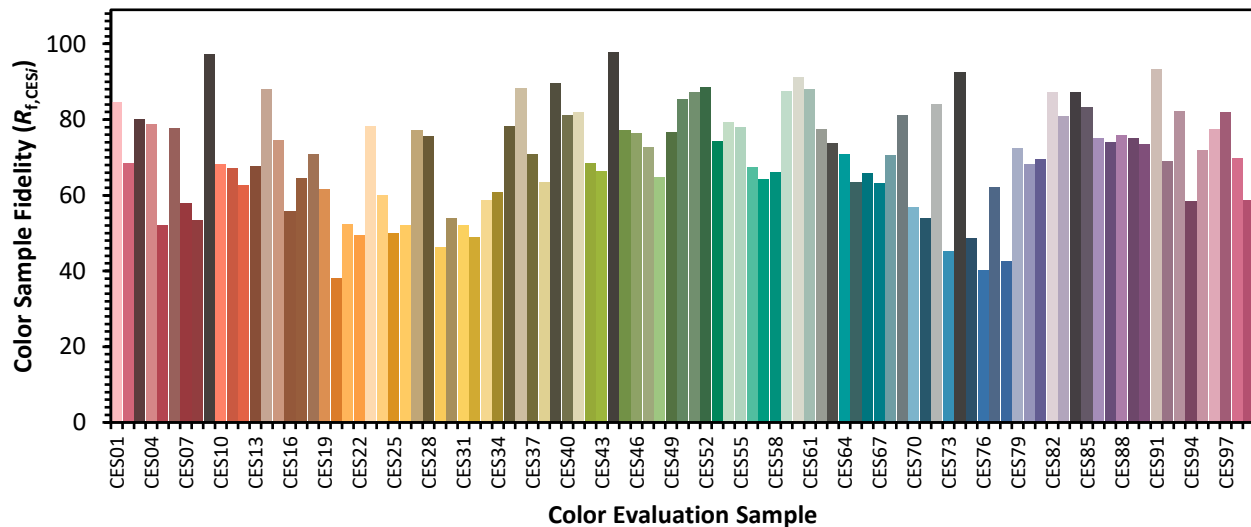

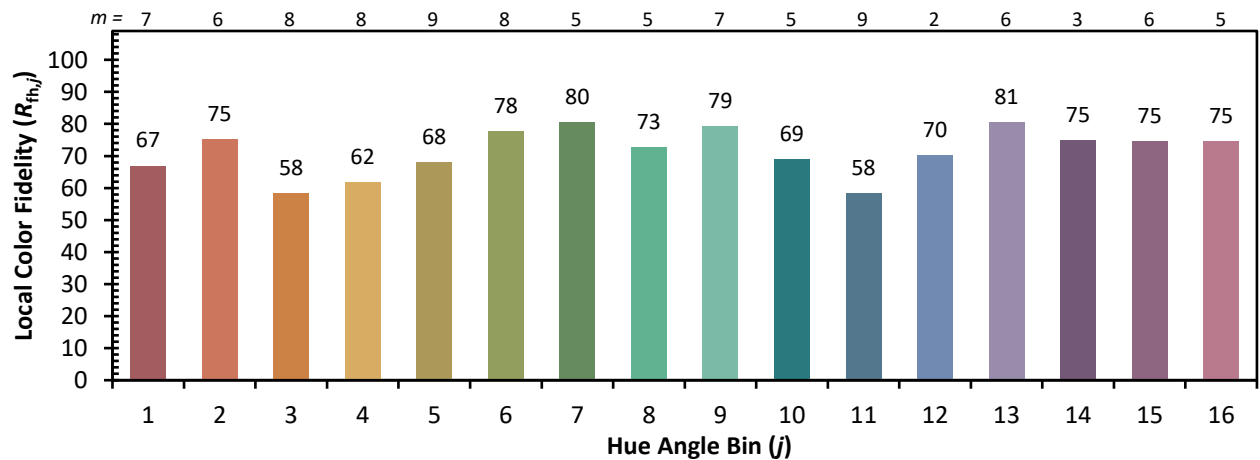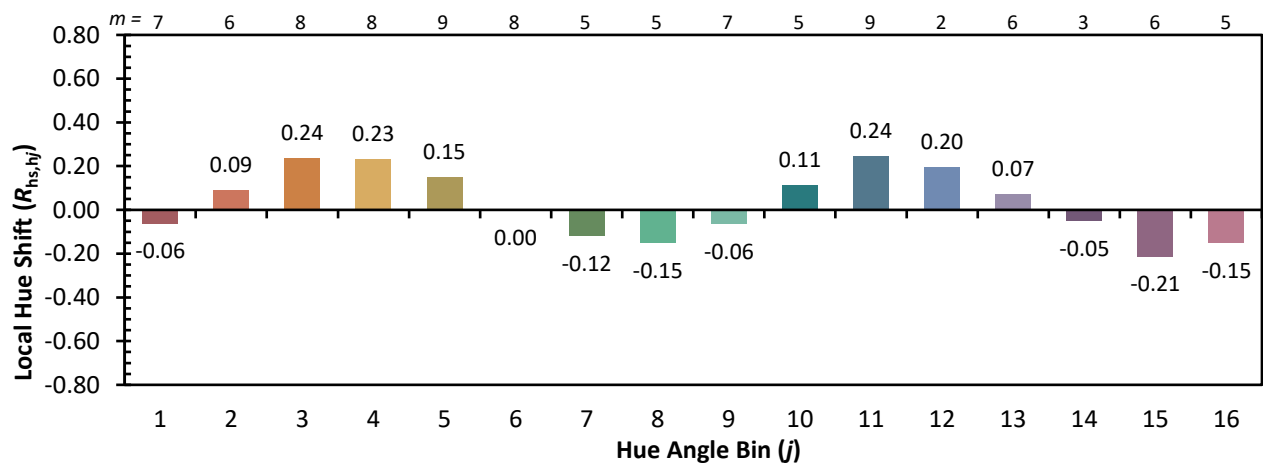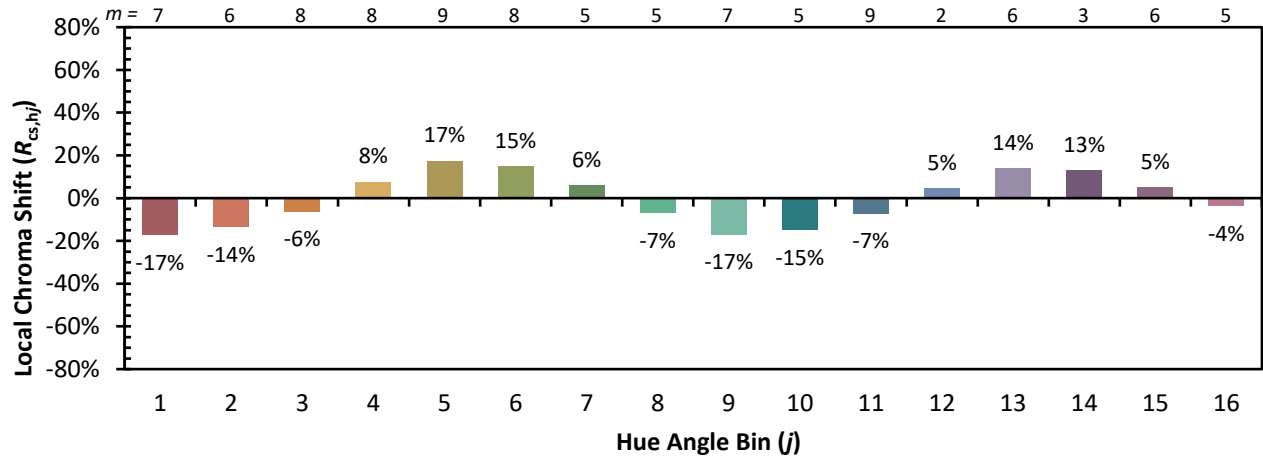Color Rendition by Hue-Angle Bin


Measure Comparisons

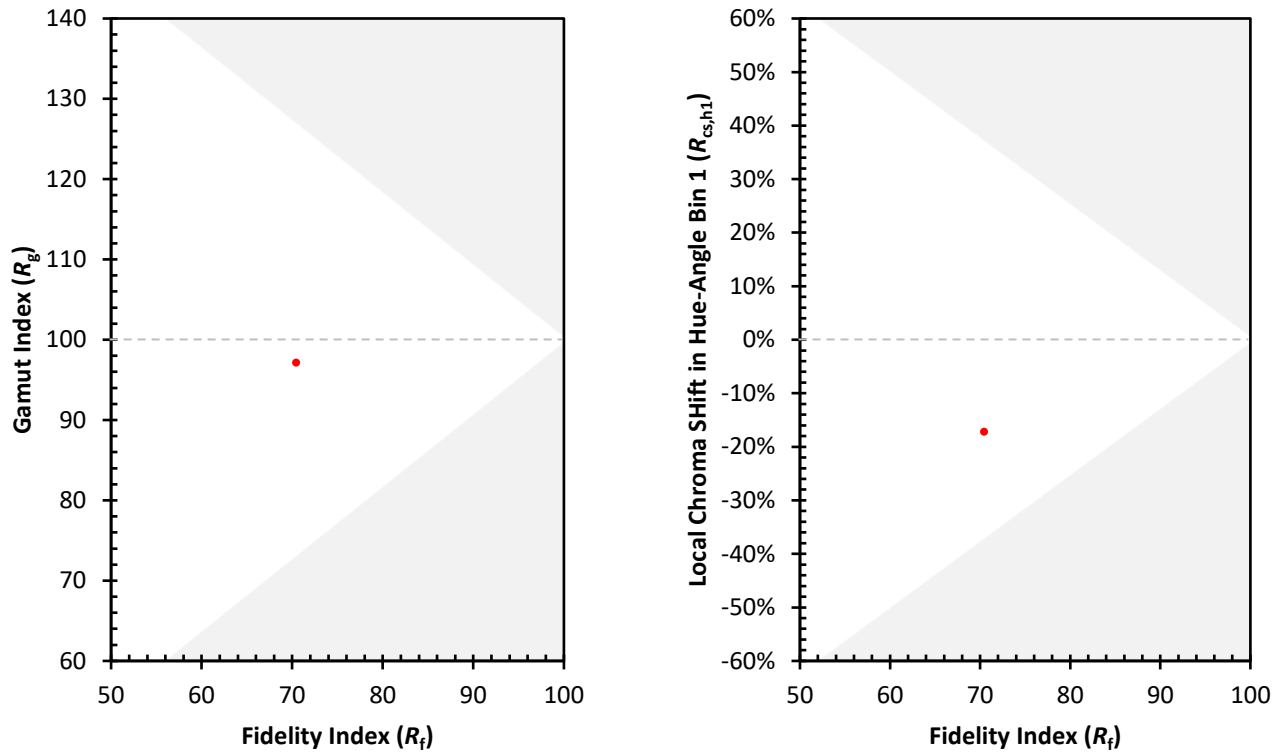

(END OF REPORT)