

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1064727

Luminaire Tested: **GLAN-SA7C-760-U-RBC**

Issue Date: 08/07/2025



Test Information

Test Method: LM-79-08
Report Number: P1064727
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SA7C-760-U-RBC
Description: GALLEON II AREA AND ROADWAY LUMINAIRE 1050mA 7xLight Square PACKAGE
70CRI 5700K FIXTURE w/ RIGHT CORNER BACKLIGHT CONTROL
Light Source: (98) 5700K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 35421.4 lumens
Efficiency: N/A
Efficacy: 107.3 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type III - Short
BUG Rating: B0 - U0 - G5


Input Watts (W): 330
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd


--- 1/2 Max cd

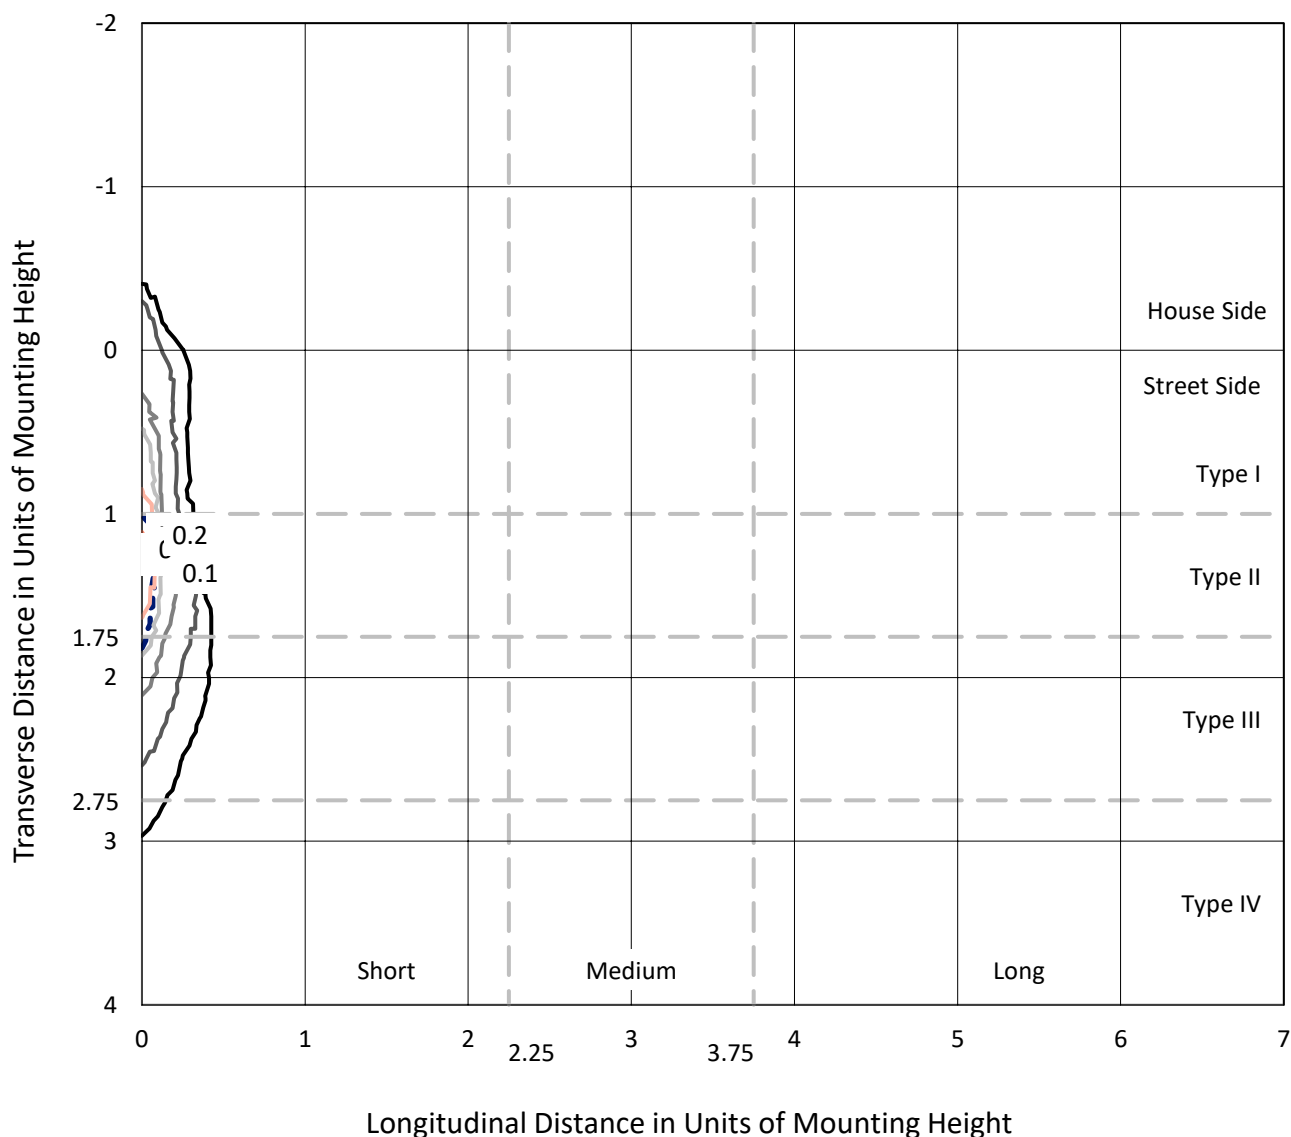

Based on 20 foot mounting height. Maximum calculated value = 5.2 fc
 Type III - Short - N/A

REPORT NUMBER: P1064727
CATALOG NUMBER: GLAN-SA7C-760-U-RBC

Luminous Intensity Polar Plot

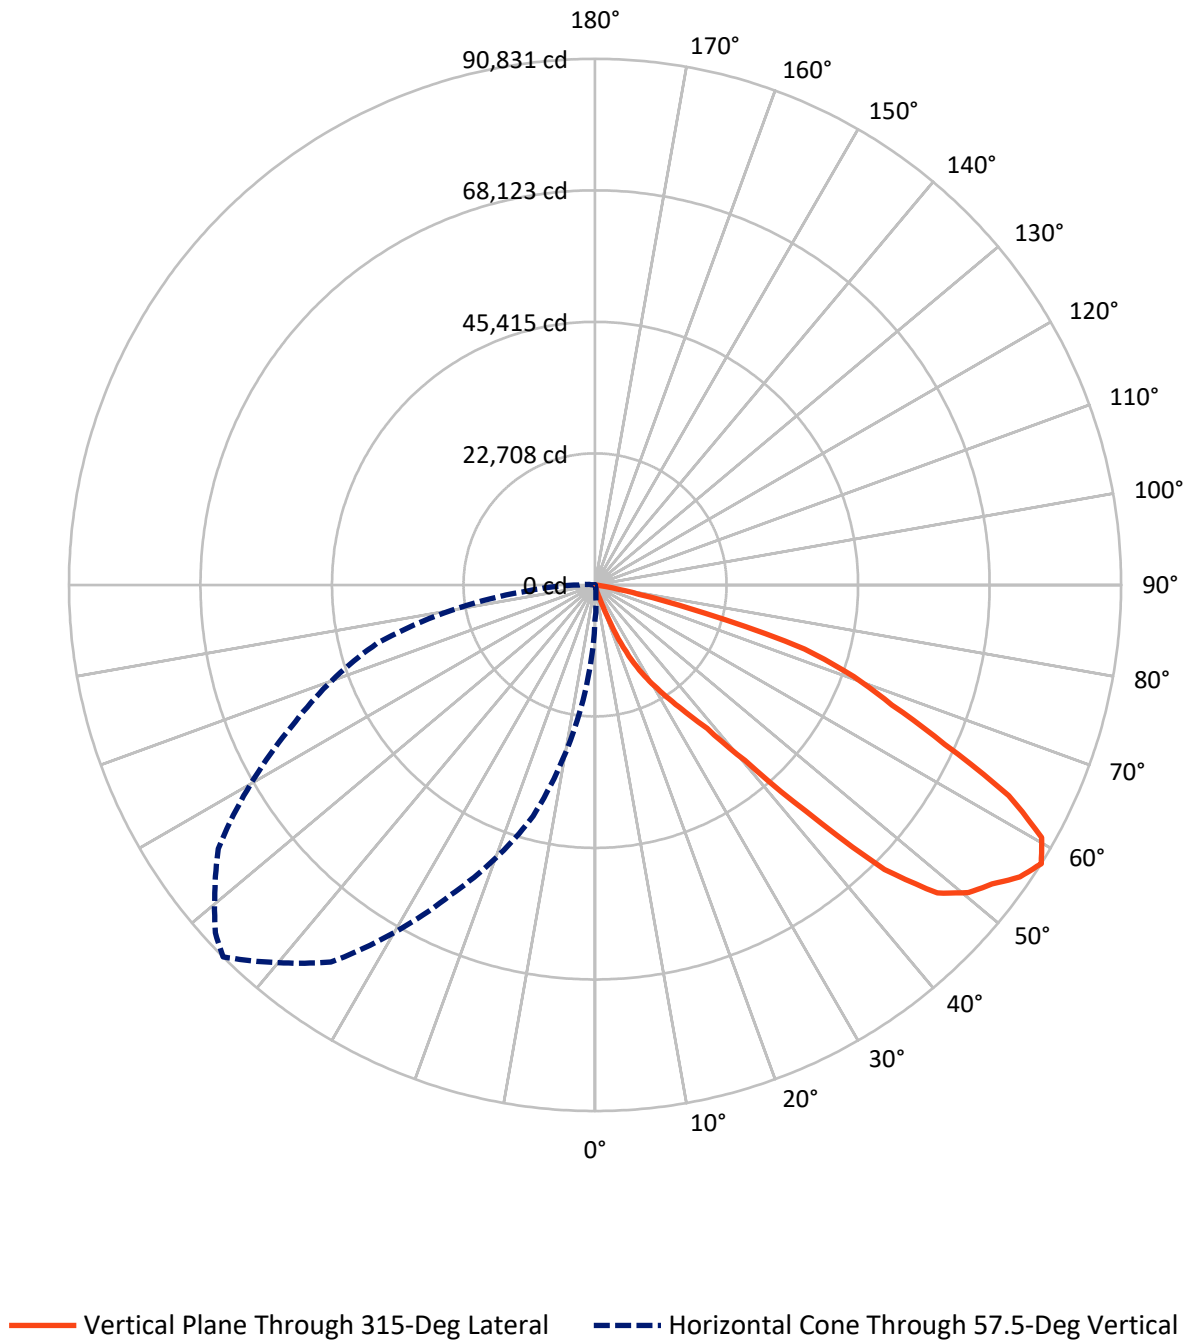

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	177.4	0.0	177.4
	% Fixture	0.5	0.0	0.5
Street Side	Lumens	35244.0	0.0	35244.0
	% Fixture	99.5	0.0	99.5
Total	Lumens	35421.4	0.0	35421.4
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	13.9	0.0
10°-20°	77.8	0.2
20°-30°	839.4	2.4
30°-40°	2482.4	7.0
40°-50°	7398.1	20.9
50°-60°	11730.7	33.1
60°-70°	9792.3	27.6
70°-80°	3019.6	8.5
80°-90°	67.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	35421.4	100.0
0°-180°	35421.4	100.0

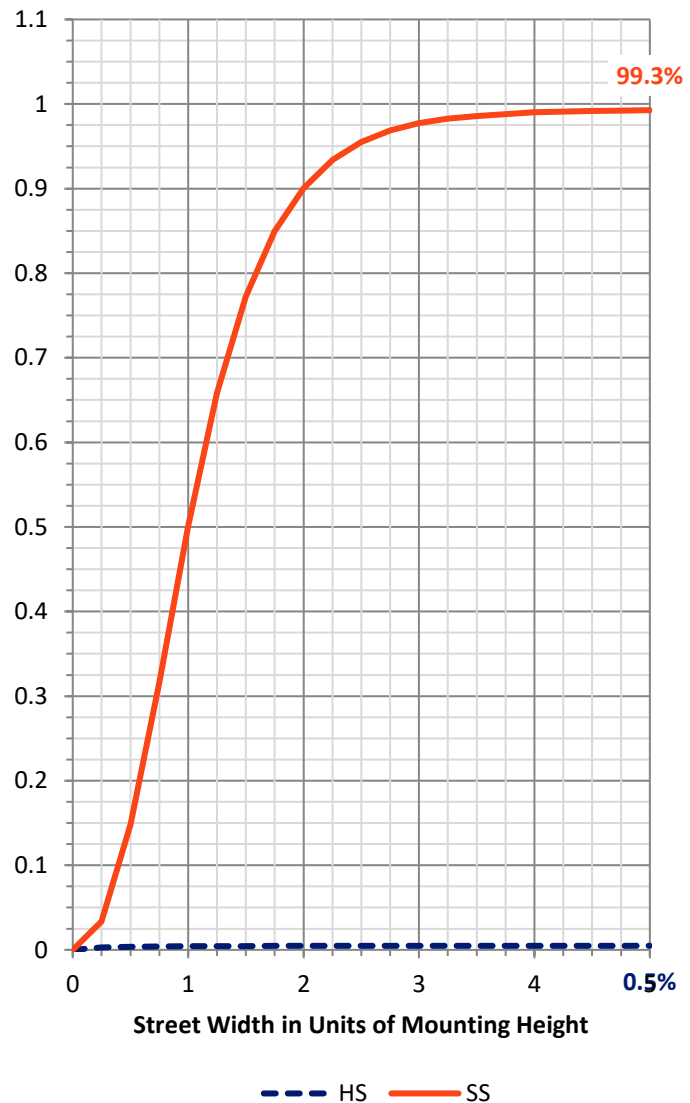

REPORT NUMBER: P1064727


CATALOG NUMBER: GLAN-SA7C-760-U-RBC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	898.6	2.5			
FM	(30°-60°)	21547.8	60.8			
FH	(60°-80°)	12745.7	36.0			G5
FVH	(80°-90°)	51.9	0.1			G1/100
BL	(0°-30°)	32.6	0.1	B0/110		
BM	(30°-60°)	63.4	0.2	B0/220		
BH	(60°-80°)	66.2	0.2	B0/110		G0/110
BVH	(80°-90°)	15.2	0.0			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G5

Type III Short

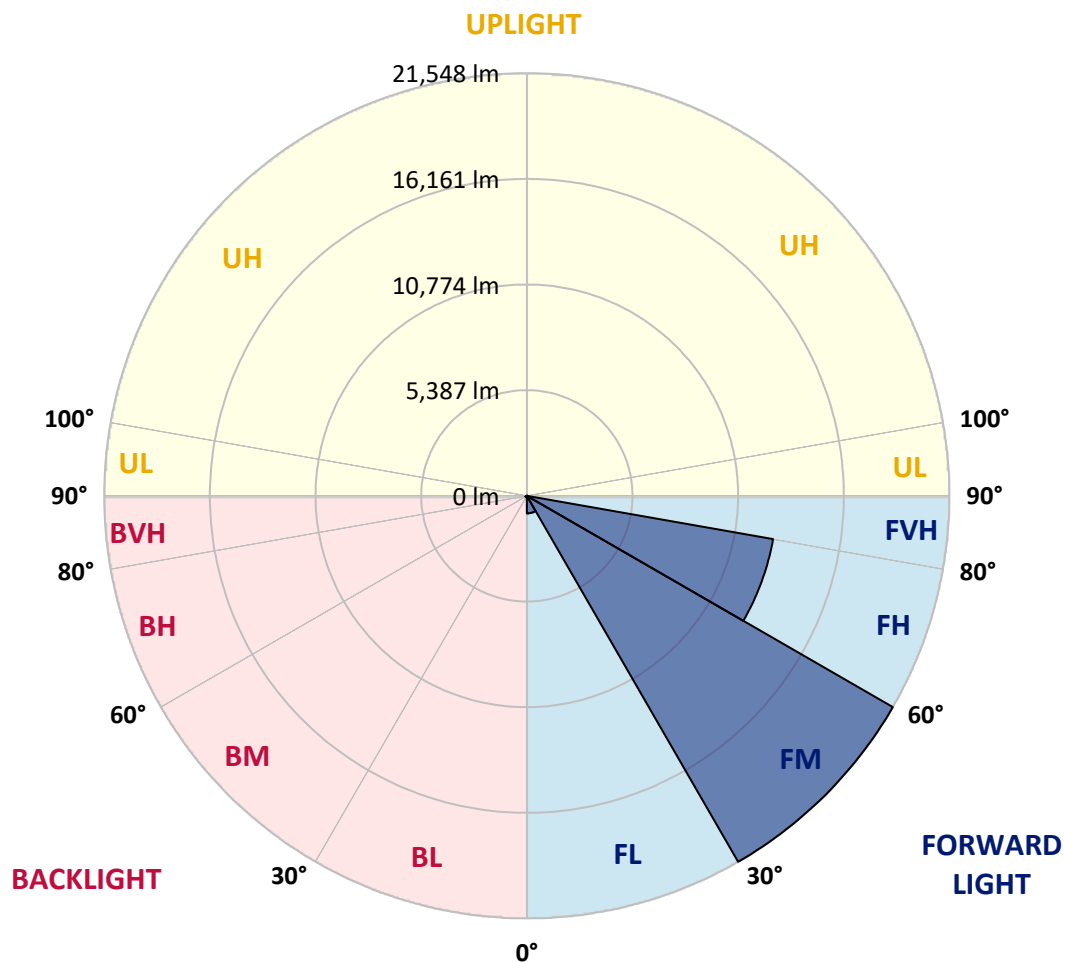



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (FULL):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	141.9	141.9	141.9	141.9	139.2	139.2	136.5	136.5	133.8	133.8	131.2
5°	149.9	149.9	147.2	144.5	144.5	141.9	139.2	136.5	136.5	133.8	131.2
7.5°	163.3	160.6	157.9	155.3	149.9	147.2	141.9	139.2	136.5	131.2	128.5
10°	179.3	174.0	168.6	163.3	157.9	152.6	147.2	144.5	139.2	136.5	131.2
12.5°	200.8	192.7	182.0	174.0	168.6	160.6	155.3	149.9	141.9	136.5	128.5
15°	219.5	208.8	195.4	184.7	176.7	166.0	157.9	149.9	144.5	136.5	128.5
17.5°	246.3	227.5	206.1	192.7	182.0	168.6	155.3	147.2	139.2	128.5	120.5
20°	291.8	254.3	214.1	198.1	182.0	166.0	149.9	139.2	131.2	120.5	112.4
22.5°	364.0	299.8	235.6	211.5	190.1	166.0	144.5	133.8	123.1	112.4	101.7
25°	503.2	388.1	273.0	240.9	208.8	176.7	144.5	131.2	120.5	107.1	96.4
27.5°	669.2	497.9	323.9	278.4	235.6	190.1	144.5	128.5	115.1	99.0	83.0
30°	837.8	610.3	380.1	321.2	262.3	203.4	144.5	125.8	109.7	91.0	72.3
32.5°	998.4	714.7	428.3	358.7	289.1	216.8	147.2	125.8	104.4	83.0	61.6
35°	1161.7	800.4	436.3	364.0	291.8	216.8	144.5	120.5	99.0	74.9	53.5
37.5°	1370.5	896.7	420.3	348.0	278.4	206.1	136.5	115.1	93.7	69.6	48.2
40°	1686.4	1057.3	428.3	353.3	278.4	203.4	128.5	107.1	88.3	66.9	45.5
42.5°	2269.9	1367.8	463.1	377.4	291.8	203.4	117.8	99.0	83.0	64.2	45.5
45°	3924.1	2272.6	621.0	492.5	364.0	235.6	107.1	91.0	77.6	61.6	48.2
47.5°	6491.1	3803.7	1116.2	861.9	610.3	356.0	104.4	91.0	77.6	61.6	48.2
50°	8284.6	4844.9	1405.3	1081.4	757.5	433.6	109.7	93.7	80.3	64.2	50.9
52.5°	8271.2	4919.9	1565.9	1201.9	840.5	476.5	115.1	99.0	85.7	69.6	53.5
55°	7353.1	4475.5	1595.3	1226.0	859.2	489.8	123.1	107.1	91.0	74.9	58.9
57.5°	6145.8	3801.0	1456.2	1126.9	800.4	471.1	141.9	123.1	107.1	88.3	72.3
60°	4861.0	2998.0	1134.9	896.7	661.2	422.9	187.4	163.3	141.9	117.8	93.7
62.5°	3356.7	2173.5	990.4	795.0	602.3	406.9	214.1	190.1	168.6	144.5	120.5
65°	2374.3	1635.5	894.0	728.1	564.8	398.8	232.9	206.1	182.0	155.3	128.5
67.5°	1774.7	1300.9	824.4	682.6	540.7	398.8	257.0	224.8	195.4	163.3	131.2
70°	1359.8	1068.0	773.6	658.5	546.1	431.0	315.9	270.4	227.5	182.0	139.2
72.5°	1108.2	912.8	714.7	631.7	548.7	465.8	382.8	323.9	265.0	203.4	144.5
75°	918.1	781.6	645.1	575.5	508.6	439.0	369.4	315.9	265.0	211.5	157.9
77.5°	610.3	556.8	500.6	460.4	420.3	377.4	337.3	291.8	248.9	203.4	157.9
80°	214.1	206.1	198.1	214.1	230.2	246.3	262.3	230.2	200.8	168.6	139.2
82.5°	32.1	29.4	26.8	29.4	32.1	34.8	37.5	40.2	42.8	45.5	48.2
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	131.2	131.2	128.5	128.5	128.5	125.8	125.8	123.1	123.1	123.1	120.5
5°	128.5	128.5	125.8	123.1	120.5	120.5	117.8	115.1	115.1	112.4	112.4
7.5°	125.8	123.1	120.5	117.8	115.1	112.4	109.7	107.1	107.1	104.4	104.4
10°	128.5	123.1	120.5	115.1	112.4	109.7	104.4	101.7	99.0	99.0	96.4
12.5°	123.1	120.5	115.1	109.7	107.1	101.7	99.0	93.7	91.0	91.0	88.3
15°	123.1	117.8	109.7	104.4	99.0	96.4	91.0	85.7	83.0	80.3	77.6
17.5°	115.1	109.7	101.7	96.4	91.0	85.7	80.3	74.9	72.3	69.6	66.9
20°	104.4	99.0	91.0	83.0	77.6	72.3	66.9	61.6	58.9	56.2	50.9
22.5°	93.7	88.3	80.3	72.3	66.9	61.6	53.5	48.2	45.5	40.2	37.5
25°	88.3	80.3	72.3	64.2	56.2	50.9	42.8	34.8	29.4	24.1	16.1
27.5°	74.9	66.9	58.9	50.9	42.8	34.8	26.8	18.7	13.4	10.7	5.4
30°	64.2	56.2	48.2	40.2	29.4	21.4	13.4	2.7	2.7	2.7	0.0
32.5°	53.5	45.5	34.8	26.8	21.4	13.4	8.0	0.0	0.0	0.0	0.0
35°	42.8	34.8	24.1	16.1	13.4	8.0	5.4	0.0	0.0	0.0	0.0
37.5°	37.5	29.4	18.7	8.0	5.4	5.4	2.7	0.0	0.0	0.0	0.0
40°	34.8	24.1	13.4	2.7	2.7	2.7	0.0	0.0	0.0	0.0	0.0
42.5°	34.8	24.1	10.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	34.8	24.1	10.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	34.8	24.1	10.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	37.5	26.8	13.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	42.8	32.1	21.4	10.7	8.0	5.4	2.7	0.0	0.0	0.0	0.0
55°	53.5	48.2	40.2	34.8	26.8	18.7	8.0	0.0	0.0	0.0	0.0
57.5°	69.6	69.6	66.9	64.2	48.2	32.1	16.1	0.0	0.0	0.0	0.0
60°	93.7	93.7	93.7	93.7	69.6	48.2	24.1	0.0	0.0	0.0	0.0
62.5°	115.1	109.7	101.7	96.4	72.3	48.2	24.1	0.0	0.0	0.0	0.0
65°	115.1	104.4	91.0	77.6	58.9	40.2	18.7	0.0	0.0	0.0	0.0
67.5°	107.1	85.7	61.6	40.2	29.4	21.4	10.7	0.0	0.0	0.0	0.0
70°	107.1	74.9	42.8	10.7	8.0	5.4	2.7	0.0	0.0	0.0	0.0
72.5°	107.1	72.3	34.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	117.8	80.3	40.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	117.8	80.3	40.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	104.4	69.6	34.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	34.8	24.1	10.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	120.5	120.5	120.5	117.8	117.8	117.8	117.8	115.1	115.1	115.1	115.1
5°	109.7	109.7	107.1	107.1	104.4	104.4	101.7	101.7	99.0	99.0	99.0
7.5°	101.7	99.0	99.0	96.4	93.7	93.7	91.0	91.0	88.3	85.7	85.7
10°	93.7	91.0	91.0	88.3	85.7	83.0	83.0	80.3	77.6	74.9	72.3
12.5°	85.7	83.0	80.3	77.6	74.9	72.3	72.3	69.6	66.9	64.2	64.2
15°	74.9	72.3	69.6	66.9	64.2	61.6	61.6	58.9	56.2	53.5	50.9
17.5°	64.2	61.6	61.6	58.9	56.2	53.5	50.9	45.5	42.8	40.2	34.8
20°	48.2	45.5	42.8	40.2	37.5	32.1	29.4	24.1	18.7	16.1	13.4
22.5°	32.1	26.8	24.1	18.7	13.4	10.7	8.0	2.7	0.0	0.0	0.0
25°	10.7	8.0	5.4	2.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	112.4	112.4	112.4	109.7	109.7	109.7	109.7	109.7	109.7	109.7	109.7
5°	96.4	96.4	96.4	93.7	93.7	91.0	91.0	91.0	88.3	88.3	88.3
7.5°	83.0	80.3	80.3	77.6	77.6	74.9	74.9	74.9	72.3	72.3	72.3
10°	69.6	66.9	66.9	64.2	64.2	61.6	61.6	58.9	58.9	56.2	56.2
12.5°	61.6	58.9	56.2	53.5	53.5	50.9	48.2	48.2	45.5	42.8	42.8
15°	48.2	45.5	42.8	40.2	37.5	34.8	32.1	32.1	29.4	26.8	24.1
17.5°	32.1	26.8	24.1	21.4	21.4	18.7	16.1	13.4	10.7	8.0	8.0
20°	8.0	5.4	2.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	109.7	107.1	107.1	107.1	109.7	109.7	109.7	109.7	109.7	109.7	109.7
5°	88.3	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7
7.5°	72.3	69.6	69.6	69.6	69.6	66.9	66.9	66.9	66.9	66.9	66.9
10°	56.2	53.5	53.5	53.5	53.5	50.9	50.9	50.9	50.9	50.9	50.9
12.5°	40.2	40.2	37.5	37.5	37.5	34.8	34.8	34.8	34.8	32.1	32.1
15°	24.1	21.4	18.7	18.7	18.7	16.1	16.1	16.1	16.1	13.4	13.4
17.5°	5.4	5.4	2.7	2.7	2.7	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	112.4	112.4	115.1	115.1	117.8	123.1	125.8	128.5	133.8	139.2	141.9
5°	88.3	91.0	91.0	93.7	96.4	99.0	101.7	104.4	109.7	115.1	120.5
7.5°	69.6	69.6	72.3	72.3	74.9	80.3	83.0	85.7	91.0	99.0	104.4
10°	53.5	53.5	56.2	56.2	58.9	64.2	66.9	69.6	74.9	83.0	88.3
12.5°	34.8	37.5	37.5	40.2	42.8	48.2	50.9	53.5	58.9	64.2	69.6
15°	16.1	18.7	18.7	21.4	24.1	29.4	32.1	34.8	40.2	48.2	53.5
17.5°	2.7	2.7	5.4	5.4	8.0	10.7	13.4	16.1	24.1	29.4	37.5
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.4	10.7	16.1
22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	2.7
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	137.5°	140°	142.5°	145°	147.5°	150°	152.5°	155°	157.5°	160°	162.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	147.2	152.6	157.9	163.3	168.6	174.0	176.7	182.0	184.7	187.4	187.4
5°	125.8	131.2	139.2	144.5	149.9	155.3	160.6	163.3	166.0	168.6	171.3
7.5°	109.7	115.1	123.1	128.5	133.8	139.2	144.5	149.9	152.6	155.3	157.9
10°	93.7	101.7	107.1	115.1	120.5	125.8	131.2	136.5	141.9	144.5	149.9
12.5°	74.9	83.0	91.0	96.4	104.4	112.4	117.8	123.1	128.5	133.8	136.5
15°	58.9	66.9	74.9	80.3	88.3	96.4	104.4	109.7	115.1	120.5	125.8
17.5°	42.8	50.9	58.9	64.2	72.3	80.3	85.7	93.7	99.0	104.4	112.4
20°	21.4	29.4	37.5	45.5	53.5	61.6	66.9	74.9	80.3	85.7	91.0
22.5°	2.7	10.7	18.7	24.1	32.1	40.2	45.5	53.5	58.9	64.2	69.6
25°	0.0	2.7	8.0	10.7	13.4	18.7	24.1	29.4	34.8	40.2	48.2
27.5°	0.0	0.0	0.0	0.0	0.0	2.7	5.4	10.7	16.1	21.4	26.8
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.4	8.0
32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	2.7
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	2.7	5.4	10.7
85°	0.0	0.0	0.0	0.0	0.0	5.4	8.0	13.4	16.1	18.7	24.1
87.5°	0.0	2.7	5.4	8.0	10.7	16.1	21.4	26.8	29.4	32.1	34.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	165°	167.5°	170°	172.5°	175°	177.5°	180°	182.5°	185°	187.5°	190°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	190.1	190.1	190.1	190.1	187.4	187.4	187.4	184.7	184.7	182.0	182.0
5°	174.0	176.7	176.7	176.7	176.7	176.7	176.7	176.7	174.0	174.0	174.0
7.5°	160.6	163.3	166.0	166.0	168.6	168.6	168.6	166.0	166.0	163.3	163.3
10°	152.6	155.3	155.3	157.9	157.9	157.9	157.9	157.9	157.9	157.9	157.9
12.5°	141.9	144.5	147.2	147.2	149.9	149.9	149.9	149.9	147.2	147.2	147.2
15°	128.5	133.8	136.5	139.2	139.2	141.9	141.9	141.9	141.9	141.9	141.9
17.5°	117.8	123.1	125.8	128.5	128.5	131.2	131.2	133.8	133.8	133.8	133.8
20°	96.4	101.7	104.4	109.7	112.4	115.1	117.8	120.5	120.5	123.1	120.5
22.5°	74.9	80.3	83.0	88.3	91.0	93.7	96.4	99.0	101.7	104.4	104.4
25°	53.5	58.9	61.6	66.9	69.6	72.3	74.9	77.6	77.6	80.3	83.0
27.5°	29.4	34.8	40.2	42.8	48.2	50.9	53.5	56.2	58.9	61.6	64.2
30°	13.4	16.1	18.7	24.1	26.8	29.4	32.1	37.5	40.2	42.8	45.5
32.5°	0.0	0.0	2.7	8.0	10.7	13.4	16.1	18.7	18.7	21.4	26.8
35°	0.0	0.0	0.0	0.0	0.0	0.0	2.7	5.4	8.0	10.7	16.1
37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.4
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.4
42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7
47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	5.4	5.4	5.4	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
82.5°	13.4	16.1	18.7	18.7	21.4	21.4	21.4	21.4	18.7	18.7	18.7
85°	26.8	29.4	32.1	32.1	34.8	34.8	34.8	34.8	34.8	34.8	34.8
87.5°	37.5	40.2	42.8	42.8	45.5	45.5	45.5	45.5	45.5	45.5	45.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°	215°	217.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	179.3	179.3	176.7	176.7	176.7	176.7	176.7	179.3	182.0	182.0	184.7
5°	171.3	171.3	168.6	168.6	168.6	171.3	171.3	174.0	176.7	179.3	182.0
7.5°	163.3	160.6	160.6	163.3	163.3	166.0	166.0	168.6	171.3	174.0	176.7
10°	157.9	155.3	155.3	155.3	157.9	157.9	160.6	163.3	166.0	168.6	171.3
12.5°	147.2	147.2	147.2	147.2	149.9	149.9	152.6	155.3	160.6	163.3	166.0
15°	141.9	139.2	139.2	139.2	139.2	141.9	141.9	147.2	152.6	155.3	160.6
17.5°	131.2	131.2	128.5	128.5	131.2	131.2	133.8	139.2	144.5	147.2	152.6
20°	120.5	117.8	115.1	115.1	117.8	117.8	120.5	125.8	131.2	133.8	139.2
22.5°	104.4	101.7	101.7	101.7	101.7	104.4	104.4	109.7	117.8	123.1	128.5
25°	83.0	85.7	85.7	88.3	88.3	91.0	93.7	99.0	107.1	112.4	117.8
27.5°	64.2	66.9	66.9	72.3	74.9	77.6	80.3	88.3	96.4	101.7	109.7
30°	48.2	50.9	53.5	56.2	61.6	66.9	72.3	80.3	88.3	93.7	101.7
32.5°	29.4	34.8	37.5	42.8	48.2	53.5	58.9	66.9	77.6	85.7	93.7
35°	21.4	24.1	29.4	32.1	37.5	42.8	48.2	58.9	66.9	77.6	85.7
37.5°	10.7	16.1	21.4	26.8	32.1	37.5	42.8	53.5	64.2	72.3	83.0
40°	8.0	13.4	16.1	21.4	29.4	34.8	40.2	50.9	61.6	72.3	83.0
42.5°	5.4	8.0	10.7	18.7	24.1	32.1	40.2	50.9	61.6	72.3	83.0
45°	5.4	5.4	8.0	16.1	24.1	34.8	42.8	53.5	61.6	72.3	80.3
47.5°	5.4	8.0	10.7	21.4	26.8	34.8	42.8	50.9	61.6	69.6	77.6
50°	8.0	10.7	13.4	24.1	29.4	37.5	42.8	53.5	61.6	72.3	80.3
52.5°	5.4	8.0	10.7	21.4	29.4	40.2	48.2	58.9	69.6	77.6	88.3
55°	2.7	2.7	2.7	16.1	32.1	45.5	61.6	69.6	80.3	88.3	96.4
57.5°	0.0	0.0	0.0	10.7	32.1	50.9	69.6	80.3	91.0	99.0	109.7
60°	0.0	0.0	0.0	10.7	32.1	50.9	69.6	83.0	96.4	109.7	123.1
62.5°	0.0	0.0	0.0	10.7	26.8	42.8	58.9	80.3	104.4	125.8	147.2
65°	0.0	0.0	0.0	8.0	21.4	34.8	48.2	80.3	112.4	141.9	174.0
67.5°	0.0	0.0	0.0	8.0	21.4	32.1	45.5	80.3	112.4	147.2	179.3
70°	0.0	0.0	0.0	8.0	21.4	34.8	48.2	80.3	112.4	144.5	176.7
72.5°	0.0	0.0	0.0	8.0	24.1	37.5	53.5	80.3	107.1	133.8	160.6
75°	0.0	0.0	0.0	10.7	24.1	40.2	56.2	80.3	104.4	125.8	149.9
77.5°	0.0	0.0	0.0	8.0	24.1	37.5	53.5	77.6	101.7	123.1	147.2
80°	8.0	5.4	5.4	13.4	24.1	34.8	45.5	69.6	96.4	120.5	144.5
82.5°	16.1	16.1	13.4	18.7	24.1	32.1	40.2	61.6	85.7	107.1	128.5
85°	32.1	32.1	29.4	32.1	32.1	34.8	37.5	48.2	58.9	69.6	80.3
87.5°	42.8	42.8	40.2	40.2	40.2	37.5	37.5	37.5	37.5	34.8	34.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	187.4	190.1	190.1	192.7	195.4	198.1	198.1	200.8	200.8	200.8	200.8
5°	184.7	190.1	192.7	195.4	198.1	200.8	203.4	206.1	208.8	208.8	208.8
7.5°	182.0	184.7	190.1	192.7	198.1	200.8	206.1	208.8	211.5	214.1	216.8
10°	176.7	182.0	187.4	192.7	198.1	203.4	208.8	214.1	219.5	222.2	227.5
12.5°	171.3	179.3	184.7	190.1	198.1	206.1	211.5	219.5	224.8	230.2	238.2
15°	168.6	174.0	182.0	187.4	198.1	208.8	216.8	227.5	238.2	246.3	259.6
17.5°	160.6	171.3	179.3	187.4	198.1	211.5	222.2	232.9	248.9	265.0	286.4
20°	149.9	157.9	168.6	176.7	192.7	206.1	222.2	235.6	259.6	283.7	329.2
22.5°	139.2	149.9	157.9	168.6	187.4	203.4	222.2	238.2	278.4	315.9	420.3
25°	128.5	141.9	152.6	163.3	184.7	206.1	227.5	248.9	315.9	382.8	570.2
27.5°	123.1	133.8	147.2	157.9	184.7	214.1	240.9	267.7	374.7	479.1	792.3
30°	115.1	128.5	139.2	152.6	187.4	222.2	257.0	291.8	455.0	618.3	1073.4
32.5°	107.1	120.5	133.8	147.2	192.7	238.2	281.1	326.6	540.7	752.2	1341.1
35°	99.0	115.1	128.5	141.9	200.8	262.3	321.2	380.1	618.3	853.9	1523.1
37.5°	96.4	112.4	125.8	139.2	203.4	265.0	329.2	390.8	626.4	861.9	1659.6
40°	99.0	112.4	128.5	141.9	195.4	248.9	299.8	353.3	599.6	843.2	1796.1
42.5°	99.0	115.1	131.2	147.2	190.1	232.9	275.7	318.5	591.6	864.6	2063.8
45°	96.4	112.4	128.5	144.5	184.7	222.2	262.3	299.8	639.7	977.0	2599.1
47.5°	93.7	109.7	125.8	141.9	182.0	222.2	262.3	302.5	827.1	1349.1	3961.6
50°	93.7	109.7	123.1	136.5	184.7	235.6	283.7	331.9	1204.5	2074.5	6068.2
52.5°	99.0	112.4	123.1	133.8	190.1	248.9	305.2	361.4	1531.1	2698.2	7639.5
55°	107.1	115.1	125.8	133.8	203.4	270.4	339.9	406.9	1630.1	2853.4	7813.5
57.5°	117.8	125.8	133.8	141.9	227.5	313.2	396.2	481.8	1638.2	2791.9	7050.6
60°	131.2	141.9	149.9	157.9	248.9	342.6	433.6	524.6	1482.9	2438.5	6028.1
62.5°	160.6	174.0	184.7	198.1	286.4	372.1	460.4	546.1	1231.3	1916.6	4711.1
65°	184.7	195.4	206.1	216.8	302.5	390.8	476.5	562.1	1043.9	1525.8	3560.1
67.5°	190.1	200.8	208.8	219.5	307.8	396.2	481.8	570.2	894.0	1215.2	2628.6
70°	192.7	206.1	222.2	235.6	326.6	417.6	505.9	596.9	792.3	987.7	1860.3
72.5°	184.7	211.5	235.6	259.6	345.3	428.3	513.9	596.9	736.1	875.3	1383.9
75°	184.7	222.2	257.0	291.8	356.0	417.6	481.8	543.4	650.5	757.5	1006.5
77.5°	195.4	243.6	291.8	339.9	377.4	412.2	449.7	484.5	554.1	623.7	757.5
80°	195.4	246.3	294.4	345.3	361.4	380.1	396.2	412.2	420.3	428.3	425.6
82.5°	168.6	208.8	248.9	289.1	270.4	251.6	232.9	214.1	200.8	184.7	192.7
85°	85.7	93.7	99.0	104.4	96.4	88.3	80.3	72.3	66.9	58.9	56.2
87.5°	34.8	34.8	32.1	32.1	32.1	32.1	29.4	29.4	29.4	29.4	26.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	200.8	198.1	198.1	195.4	192.7	190.1	187.4	184.7	182.0	179.3	176.7
5°	208.8	208.8	208.8	206.1	206.1	203.4	203.4	200.8	198.1	195.4	192.7
7.5°	216.8	219.5	219.5	222.2	222.2	222.2	222.2	219.5	219.5	219.5	216.8
10°	230.2	232.9	235.6	238.2	240.9	243.6	243.6	246.3	246.3	246.3	248.9
12.5°	246.3	254.3	259.6	267.7	273.0	281.1	286.4	294.4	299.8	305.2	307.8
15°	270.4	283.7	299.8	313.2	326.6	345.3	366.7	385.5	404.2	433.6	465.8
17.5°	305.2	348.0	390.8	431.0	473.8	567.5	661.2	752.2	845.9	982.4	1116.2
20°	372.1	500.6	626.4	754.8	880.7	1209.9	1536.5	1865.7	2192.3	2542.9	2896.3
22.5°	522.0	837.8	1153.7	1469.5	1785.4	2473.3	3158.6	3846.5	4531.8	5337.5	6143.2
25°	757.5	1338.4	1919.2	2497.4	3078.3	4154.3	5233.1	6309.1	7385.2	8431.8	9478.4
27.5°	1102.8	1991.5	2880.2	3766.2	4654.9	6113.7	7575.2	9034.1	10492.9	11676.0	12859.2
30°	1528.4	2733.0	3937.5	5142.1	6346.6	8006.2	9665.8	11322.7	12982.3	14275.2	15570.7
32.5°	1929.9	3404.8	4879.7	6352.0	7826.9	9716.6	11609.1	13498.9	15388.7	16802.0	18218.0
35°	2192.3	3975.0	5760.4	7543.1	9325.8	11370.9	13415.9	15458.3	17503.3	19117.4	20731.5
37.5°	2454.6	4513.0	6568.8	8627.2	10683.0	12928.8	15174.6	17420.4	19666.2	21660.4	23657.2
40°	2749.0	5163.5	7575.2	9989.7	12401.4	15062.1	17720.2	20380.9	23038.9	25852.2	28665.4
42.5°	3260.3	6242.2	9226.8	12208.7	15190.6	18710.6	22230.5	25747.8	29267.7	33282.9	37298.0
45°	4221.3	8423.8	12629.0	16831.5	21034.0	25696.9	30362.5	35025.4	39688.3	45031.2	50374.0
47.5°	6574.1	12355.9	18135.1	23916.9	29696.0	34731.0	39763.3	44798.3	49830.6	55152.0	60473.4
50°	10059.3	16788.6	23518.0	30244.7	36974.1	41530.0	46083.1	50639.0	55192.1	60253.9	65315.7
52.5°	12580.8	19591.2	26604.3	33614.8	40625.2	44736.7	48850.9	52962.4	57073.9	61803.7	66533.6
55°	12770.8	19741.1	26714.1	33684.4	40654.7	44784.9	48915.1	53045.4	57175.6	62189.2	67205.4
57.5°	11306.6	18220.7	25132.1	32046.2	38957.6	43660.7	48361.0	53064.1	57764.5	63185.0	68605.4
60°	9617.6	16534.4	23448.4	30365.2	37279.3	42697.0	48117.5	53535.2	58953.0	64030.8	69105.9
62.5°	7503.0	14617.8	21735.3	28850.1	35965.0	41465.7	46966.5	52464.5	57965.3	61774.3	65586.0
65°	5591.8	12500.5	19409.2	26315.2	33224.0	37629.9	42035.9	46439.1	50845.1	53203.3	55564.2
67.5°	4041.9	10000.4	15956.2	21914.6	27870.4	31023.7	34176.9	37327.4	40480.7	42284.8	44091.6
70°	2733.0	6860.5	10985.4	15113.0	19237.9	21829.0	24422.8	27013.9	29605.0	32040.8	34474.0
72.5°	1892.5	4210.5	6531.3	8849.4	11167.4	13774.6	16379.1	18986.3	21590.8	24168.5	26746.2
75°	1255.4	2310.0	3367.4	4422.0	5476.7	7406.6	9339.2	11269.2	13199.1	14735.6	16272.0
77.5°	891.4	1207.2	1525.8	1841.6	2157.5	2518.8	2882.9	3244.2	3605.6	4154.3	4703.1
80°	422.9	463.1	503.2	540.7	580.9	712.0	843.2	974.3	1105.5	1244.7	1383.9
82.5°	200.8	216.8	232.9	246.3	262.3	275.7	289.1	302.5	315.9	302.5	286.4
85°	53.5	53.5	56.2	56.2	56.2	56.2	56.2	56.2	56.2	53.5	50.9
87.5°	24.1	24.1	24.1	24.1	24.1	24.1	24.1	21.4	21.4	18.7	18.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	275°	277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	174.0	171.3	168.6	166.0	163.3	157.9	157.9	155.3	155.3	152.6	152.6
5°	190.1	187.4	184.7	182.0	182.0	179.3	176.7	176.7	174.0	171.3	171.3
7.5°	216.8	214.1	211.5	208.8	208.8	206.1	206.1	203.4	203.4	200.8	198.1
10°	248.9	248.9	248.9	248.9	248.9	246.3	246.3	246.3	243.6	243.6	240.9
12.5°	313.2	315.9	321.2	326.6	334.6	334.6	334.6	331.9	331.9	329.2	321.2
15°	495.2	524.6	546.1	567.5	586.2	629.0	623.7	615.7	610.3	602.3	572.8
17.5°	1252.7	1386.6	1458.8	1528.4	1600.7	1798.8	1766.7	1734.5	1705.1	1673.0	1531.1
20°	3246.9	3597.6	3830.4	4063.3	4298.9	4670.9	4579.9	4488.9	4397.9	4306.9	3921.5
22.5°	6946.2	7751.9	8102.6	8453.2	8801.2	9250.9	8959.1	8667.4	8378.3	8086.5	7371.8
25°	10522.3	11569.0	12160.5	12752.1	13341.0	13597.9	13217.8	12835.1	12455.0	12072.2	11172.8
27.5°	14042.3	15225.4	15747.4	16266.7	16788.6	17326.7	16855.6	16381.8	15910.7	15439.6	14403.7
30°	16863.6	18156.5	18721.3	19283.4	19848.2	20222.9	19735.8	19245.9	18758.7	18271.6	17158.0
32.5°	19631.4	21044.7	21663.0	22281.4	22897.0	23435.0	22835.5	22233.2	21633.6	21034.0	19701.0
35°	22342.9	23957.0	24808.2	25659.4	26510.6	27011.2	26299.2	25584.5	24872.5	24160.4	22605.2
37.5°	25651.4	27645.6	28598.5	29551.4	30504.4	31417.1	30632.9	29845.9	29061.6	28274.6	26363.4
40°	31478.7	34292.0	35753.5	37217.7	38679.2	39857.0	38866.6	37876.2	36885.8	35895.4	33432.7
42.5°	41313.1	45328.3	47429.5	49528.1	51629.4	53468.3	52427.0	51385.8	50344.5	49303.3	45976.1
45°	55716.8	61059.6	63621.3	66180.2	68741.9	70085.6	68586.7	67085.0	65586.0	64087.0	59959.5
47.5°	65792.1	71113.5	73394.1	75674.7	77955.3	79489.1	77655.5	75821.9	73991.0	72157.5	67700.6
50°	70374.7	75436.5	77725.1	80011.1	82299.7	83517.6	81400.3	79280.3	77163.0	75045.7	70508.6
52.5°	71260.7	75990.6	78720.9	81453.8	84184.1	85811.6	83311.5	80808.7	78308.7	75805.9	71177.8
55°	72219.0	77232.6	80399.2	83568.5	86735.1	88988.9	86162.3	83332.9	80506.3	77676.9	72711.5
57.5°	74023.2	79443.6	82602.2	85758.1	88916.7	90830.5	87995.9	85158.5	82323.8	79489.1	74397.9
60°	74183.8	79258.9	81973.1	84690.1	87404.3	88608.8	85897.3	83183.0	80471.5	77759.9	73327.2
62.5°	69395.0	73204.1	75088.5	76972.9	78857.4	80166.3	77337.0	74505.0	71675.6	68843.6	65315.7
65°	57922.4	60280.7	61782.3	63284.0	64785.7	66346.2	63755.1	61164.0	58572.9	55981.8	53406.7
67.5°	45895.7	47699.9	49678.0	51656.1	53634.3	55301.9	53227.4	51150.2	49075.7	47001.3	44099.6
70°	36909.9	39343.0	41567.4	43791.8	46016.2	47381.4	45298.8	43213.6	41131.1	39045.9	35887.3
72.5°	29323.9	31901.6	33759.3	35614.3	37472.0	37806.6	36275.5	34744.4	33215.9	31684.8	28839.4
75°	17805.8	19342.3	19379.8	19414.5	19452.0	19770.6	18501.8	17233.0	15966.9	14698.1	13560.5
77.5°	5251.8	5800.5	6252.9	6702.6	7155.0	7701.0	7235.3	6766.9	6301.1	5835.3	5219.7
80°	1520.4	1659.6	1777.4	1892.5	2010.2	1940.7	1830.9	1721.2	1611.4	1501.7	1346.4
82.5°	273.0	257.0	254.3	251.6	251.6	238.2	216.8	195.4	174.0	152.6	144.5
85°	48.2	45.5	42.8	40.2	37.5	34.8	29.4	26.8	21.4	16.1	13.4
87.5°	16.1	13.4	10.7	8.0	8.0	2.7	2.7	2.7	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	302.5°	305°	307.5°	310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
0°	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3	155.3
2.5°	152.6	149.9	149.9	149.9	149.9	147.2	147.2	147.2	147.2	144.5	144.5
5°	168.6	168.6	166.0	166.0	163.3	163.3	160.6	160.6	157.9	157.9	155.3
7.5°	198.1	195.4	192.7	190.1	187.4	182.0	179.3	176.7	176.7	174.0	171.3
10°	238.2	232.9	230.2	224.8	222.2	216.8	211.5	206.1	200.8	195.4	190.1
12.5°	313.2	302.5	294.4	283.7	273.0	265.0	254.3	246.3	235.6	227.5	216.8
15°	543.4	516.6	487.2	452.4	414.9	380.1	342.6	321.2	297.1	275.7	251.6
17.5°	1389.2	1250.0	1108.2	993.1	878.0	765.6	650.5	567.5	484.5	398.8	315.9
20°	3536.0	3150.5	2765.1	2385.0	2002.2	1622.1	1239.3	1046.6	853.9	661.2	468.4
22.5°	6654.4	5939.7	5222.4	4529.1	3833.1	3139.8	2446.6	2010.2	1576.6	1140.3	704.0
25°	10270.7	9371.3	8471.9	7331.6	6188.7	5048.4	3908.1	3198.7	2489.4	1780.0	1070.7
27.5°	13365.1	12329.2	11293.3	9906.7	8520.1	7133.6	5747.0	4689.7	3635.0	2577.7	1520.4
30°	16044.5	14931.0	13817.4	12203.4	10589.3	8975.2	7361.1	6038.8	4716.5	3394.1	2071.8
32.5°	18367.9	17034.9	15701.9	14036.9	12372.0	10707.0	9042.1	7420.0	5797.9	4173.1	2551.0
35°	21047.4	19492.2	17934.3	16087.3	14237.7	12390.7	10543.8	8712.9	6879.3	5048.4	3214.8
37.5°	24452.2	22543.7	20632.5	18574.0	16515.6	14459.9	12401.4	10308.2	8215.0	6121.8	4028.5
40°	30970.1	28507.5	26044.9	23429.7	20811.8	18196.6	15581.4	13011.7	10442.0	7869.7	5300.0
42.5°	42648.8	39321.6	35994.4	32514.6	29032.2	25552.4	22069.9	18445.6	14818.6	11194.2	7567.2
45°	55829.2	51701.6	47571.4	43666.0	39757.9	35852.5	31947.1	26973.7	22000.3	17026.9	12053.5
47.5°	63241.2	58784.4	54327.5	50630.9	46934.3	43237.7	39541.1	34179.6	28818.0	23456.5	18094.9
50°	65968.8	61431.7	56894.6	53492.4	50087.6	46685.4	43280.6	37911.0	32538.7	27169.1	21796.9
52.5°	66549.6	61921.5	57293.4	53869.8	50446.2	47025.3	43601.8	38267.0	32932.2	27594.7	22259.9
55°	67743.5	62778.1	57810.0	53907.3	50004.6	46101.9	42199.1	36778.7	31358.3	25937.8	20517.4
57.5°	69304.0	64212.8	59121.6	54675.5	50229.4	45786.0	41339.9	35413.6	29487.2	23558.2	17631.8
60°	68894.5	64464.4	60031.7	55269.8	50505.1	45743.2	40978.5	34460.6	27940.0	21422.1	14901.5
62.5°	61785.0	58257.0	54726.4	50810.3	46891.5	42975.4	39059.3	32348.7	25638.0	18927.4	12216.7
65°	50829.0	48254.0	45678.9	42528.4	39375.2	36224.6	33074.1	27056.7	21042.0	15024.7	9007.3
67.5°	41195.4	38293.7	35389.5	32878.7	30365.2	27854.4	25340.9	20605.7	15870.5	11135.3	6400.1
70°	32728.8	29572.9	26414.3	23962.4	21507.8	19055.9	16604.0	13456.1	10310.9	7163.0	4015.1
72.5°	25991.4	23146.0	20300.6	17685.4	15067.5	12452.3	9834.4	7974.1	6113.7	4253.4	2393.0
75°	12422.8	11285.2	10147.6	8779.8	7412.0	6044.1	4676.3	3865.2	3056.9	2245.8	1434.7
77.5°	4604.0	3991.1	3375.4	2818.6	2261.9	1707.8	1151.0	1054.6	958.3	861.9	765.6
80°	1191.2	1038.6	883.3	773.6	661.2	551.4	441.7	398.8	358.7	315.9	273.0
82.5°	136.5	125.8	117.8	112.4	104.4	99.0	91.0	83.0	74.9	64.2	56.2
85°	8.0	5.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727

CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	330°	332.5°	335°	337.5°	340°	342.5°	345°	347.5°	350°	352.5°	355°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1064727
 CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	357.5°	360°
0°	155.3	155.3
2.5°	144.5	141.9
5°	152.6	149.9
7.5°	168.6	163.3
10°	184.7	179.3
12.5°	208.8	200.8
15°	235.6	219.5
17.5°	281.1	246.3
20°	380.1	291.8
22.5°	535.4	364.0
25°	787.0	503.2
27.5°	1094.8	669.2
30°	1456.2	837.8
32.5°	1774.7	998.4
35°	2189.6	1161.7
37.5°	2700.9	1370.5
40°	3493.2	1686.4
42.5°	4919.9	2269.9
45°	7990.1	3924.1
47.5°	12294.4	6491.1
50°	15040.7	8284.6
52.5°	15265.6	8271.2
55°	13935.2	7353.1
57.5°	11890.2	6145.8
60°	9882.6	4861.0
62.5°	7786.7	3356.7
65°	5690.8	2374.3
67.5°	4087.4	1774.7
70°	2687.5	1359.8
72.5°	1750.6	1108.2
75°	1177.8	918.1
77.5°	687.9	610.3
80°	243.6	214.1
82.5°	45.5	32.1
85°	0.0	0.0
87.5°	0.0	0.0
90°	0.0	0.0
92.5°	0.0	0.0
95°	0.0	0.0
97.5°	0.0	0.0
100°	0.0	0.0
102.5°	0.0	0.0
105°	0.0	0.0
107.5°	0.0	0.0
110°	0.0	0.0



REPORT NUMBER: P1064727
CATALOG NUMBER: GLAN-SA7C-760-U-RBC

CANDELA DISTRIBUTION (continued):

	357.5°	360°
112.5°	0.0	0.0
115°	0.0	0.0
117.5°	0.0	0.0
120°	0.0	0.0
122.5°	0.0	0.0
125°	0.0	0.0
127.5°	0.0	0.0
130°	0.0	0.0
132.5°	0.0	0.0
135°	0.0	0.0
137.5°	0.0	0.0
140°	0.0	0.0
142.5°	0.0	0.0
145°	0.0	0.0
147.5°	0.0	0.0
150°	0.0	0.0
152.5°	0.0	0.0
155°	0.0	0.0
157.5°	0.0	0.0
160°	0.0	0.0
162.5°	0.0	0.0
165°	0.0	0.0
167.5°	0.0	0.0
170°	0.0	0.0
172.5°	0.0	0.0
175°	0.0	0.0
177.5°	0.0	0.0
180°	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-7

Test Date: 10/10/2024

Luminaire Tested: GSS-SB1A-757-U-5WQ


Data in this report applies to families of products including GSS-SB1A-757-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-7
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-757-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 70 CRI
 5700K CCT 26 LEDS

Spectral Parameters

CCT (K):	5571	CRI (Ra):	69.9		
CIE u':	0.2033	R1:	68.8	R9:	-35.4
CIE v':	0.4806	R2:	72.5	R10:	36.7
Duv:	0.0041	R3:	76.8	R11:	73.9
CIE x:	0.3308	R4:	72.0	R12:	47.8
CIE y:	0.3476	R5:	70.9	R13:	68.0
CIE z:	0.3216	R6:	65.6	R14:	87.0
Peak Wavelength (nm):	442	R7:	75.5	R15:	59.8
Dominant Wavelength (nm):	544	R8:	56.8		
Purity:	3.635698				
Rf:	70.4				
Rg:	97.1				

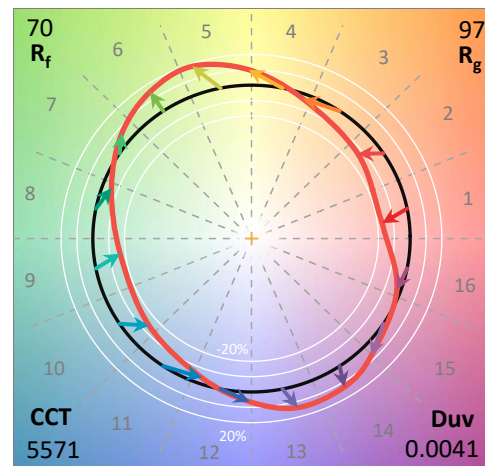

Test Conditions


Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-7


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-7

CIE 1931 Chromaticity Diagram

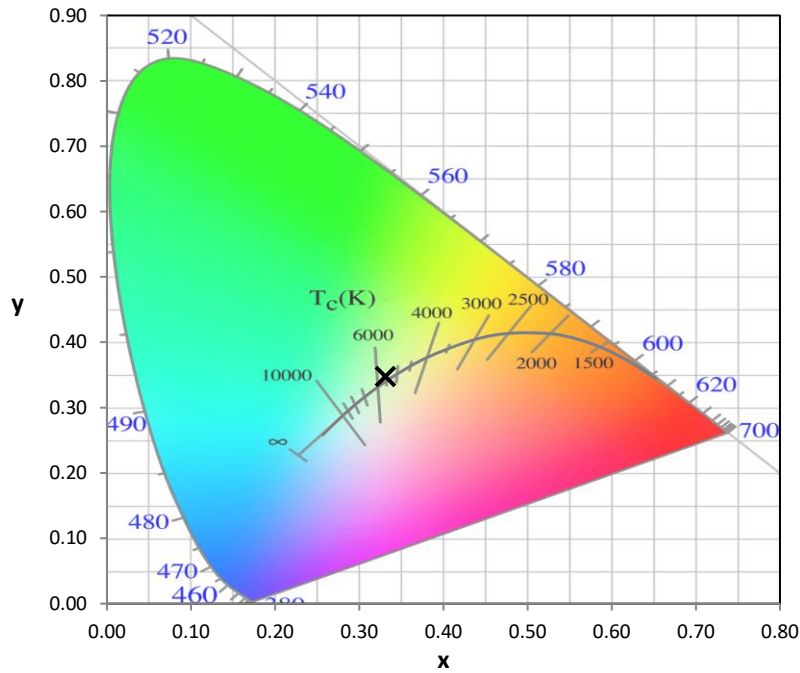


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

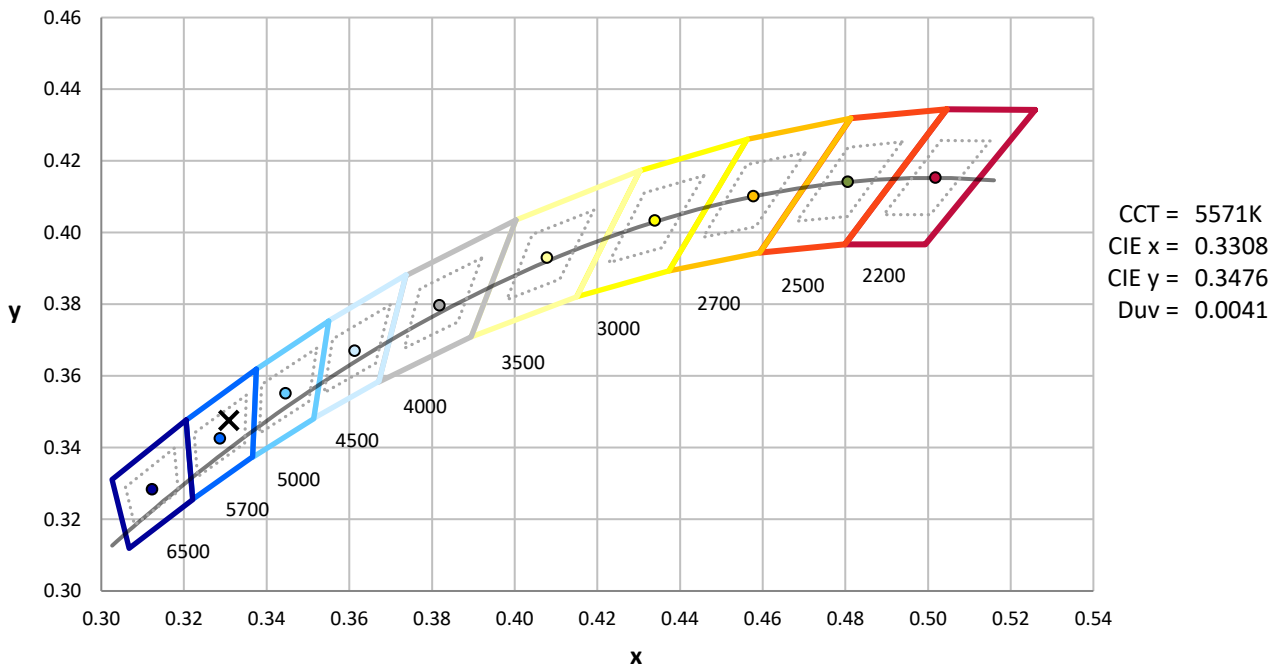

Point lies inside the ANSI 5700K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-7

Photopic Flux vs. Wavelength

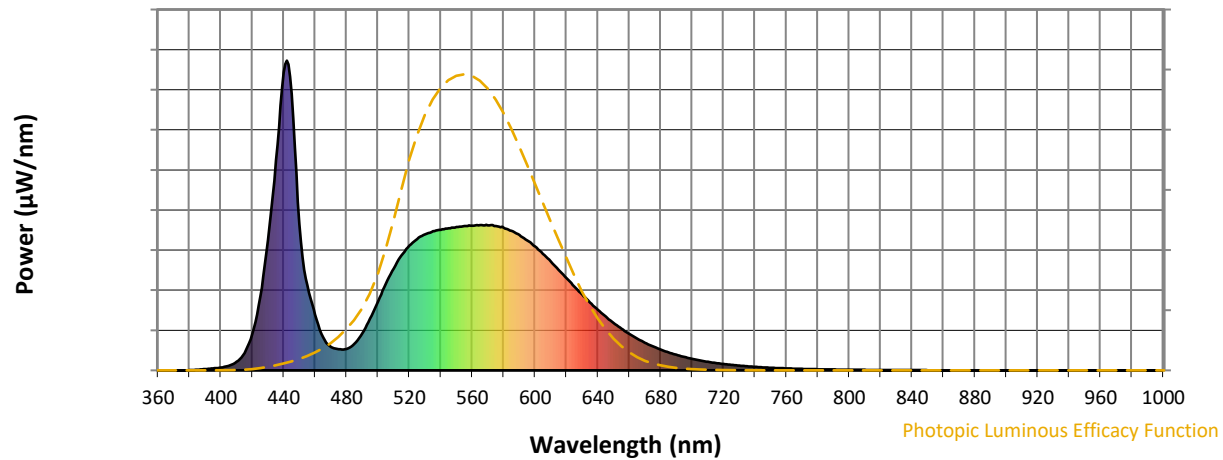


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Scotopic Flux vs. Wavelength

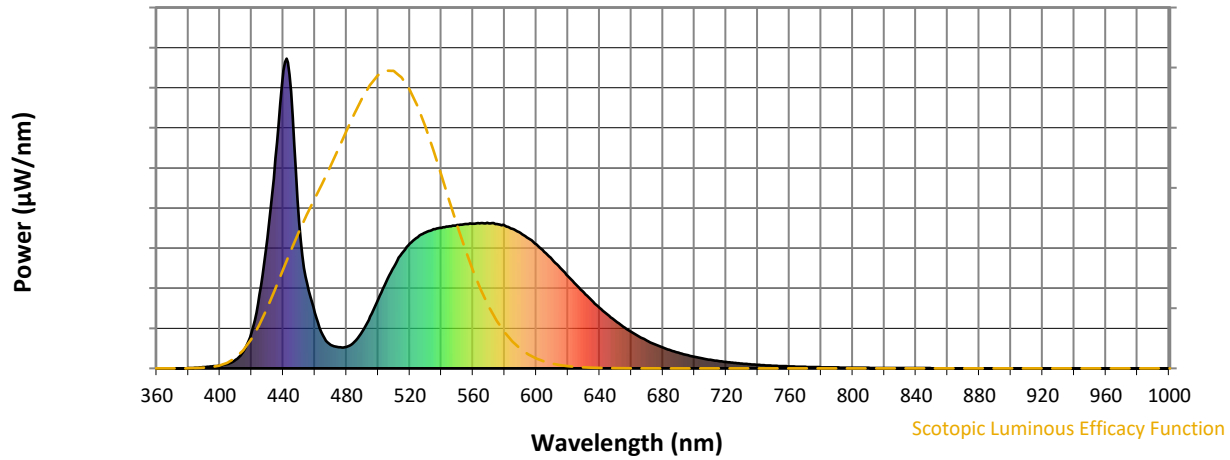


Scotopic Lumens: NR

S/P: 1.84

λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7

Melanopic Flux vs. Wavelength

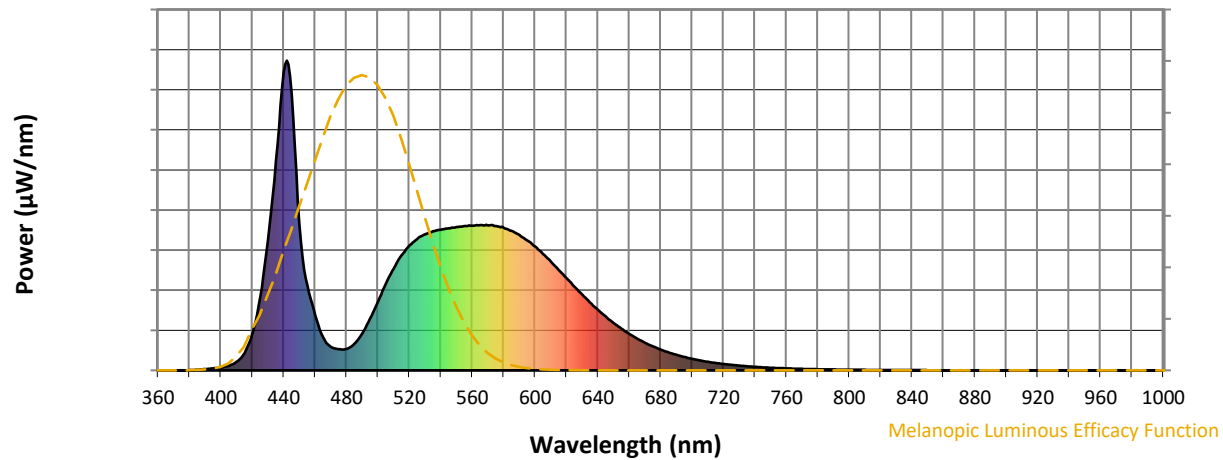
Melanopic Lumens: NR
M/P: 3.71


λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	120	NR	620	298	NR	750	9	NR	880	0	NR
365	0	NR	495	167	NR	625	270	NR	755	7	NR	885	0	NR
370	0	NR	500	222	NR	630	245	NR	760	6	NR	890	0	NR
375	0	NR	505	279	NR	635	219	NR	765	6	NR	895	0	NR
380	1	NR	510	329	NR	640	196	NR	770	5	NR	900	0	NR
385	2	NR	515	371	NR	645	173	NR	775	4	NR	905	0	NR
390	4	NR	520	403	NR	650	153	NR	780	4	NR	910	0	NR
395	6	NR	525	424	NR	655	135	NR	785	3	NR	915	0	NR
400	9	NR	530	439	NR	660	117	NR	790	3	NR	920	0	NR
405	14	NR	535	449	NR	665	103	NR	795	2	NR	925	0	NR
410	28	NR	540	454	NR	670	89	NR	800	2	NR	930	0	NR
415	55	NR	545	459	NR	675	77	NR	805	2	NR	935	0	NR
420	118	NR	550	463	NR	680	67	NR	810	2	NR	940	0	NR
425	237	NR	555	466	NR	685	58	NR	815	1	NR	945	0	NR
430	420	NR	560	467	NR	690	50	NR	820	1	NR	950	0	NR
435	677	NR	565	469	NR	695	43	NR	825	1	NR	955	0	NR
440	962	NR	570	469	NR	700	37	NR	830	1	NR	960	0	NR
445	894	NR	575	466	NR	705	32	NR	835	1	NR	965	0	NR
450	472	NR	580	461	NR	710	28	NR	840	1	NR	970	0	NR
455	275	NR	585	450	NR	715	24	NR	845	1	NR	975	0	NR
460	180	NR	590	437	NR	720	21	NR	850	1	NR	980	0	NR
465	107	NR	595	420	NR	725	18	NR	855	0	NR	985	0	NR
470	76	NR	600	400	NR	730	15	NR	860	0	NR	990	0	NR
475	68	NR	605	376	NR	735	13	NR	865	0	NR	995	0	NR
480	69	NR	610	352	NR	740	11	NR	870	0	NR	1000	0	NR
485	86	NR	615	325	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2407-184-7





TM-30-18

Summary

$R_f = 70.4$
 $R_g = 97.1$
 $CIE\ R_a = 69.9$
 $R_g = -35.4$

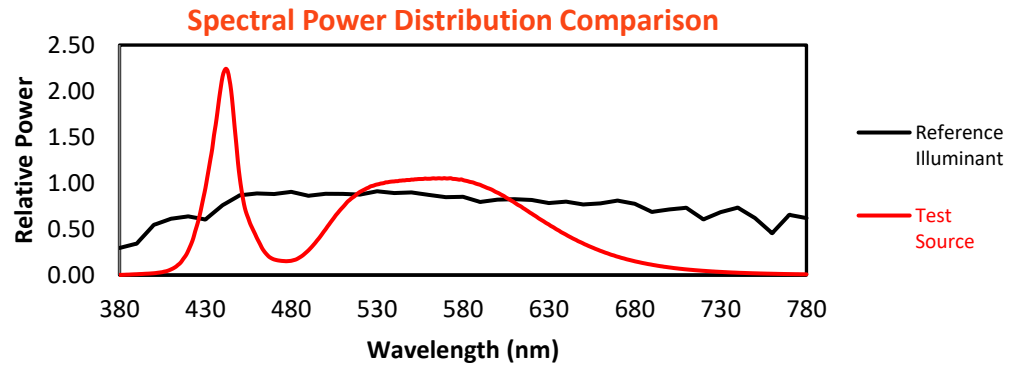


Color Vector Graphics

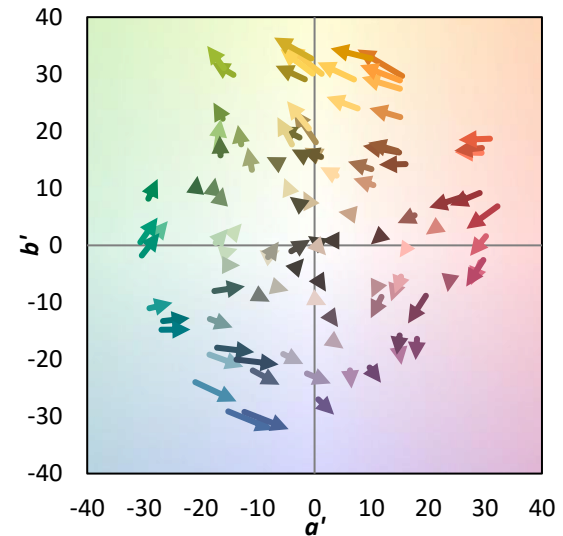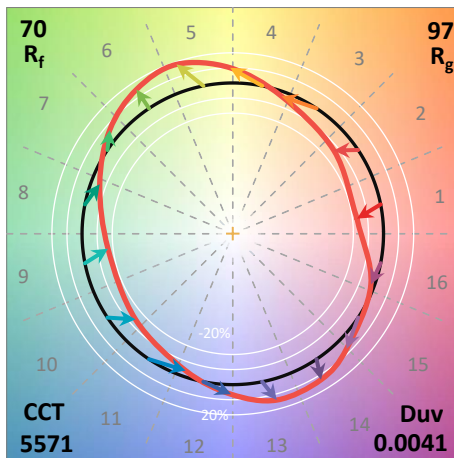
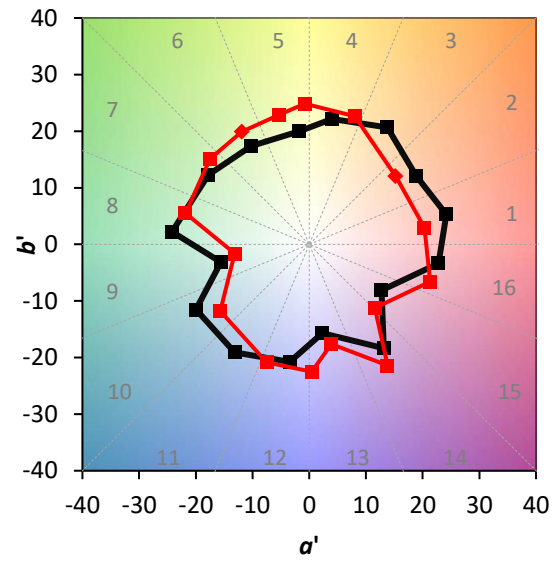
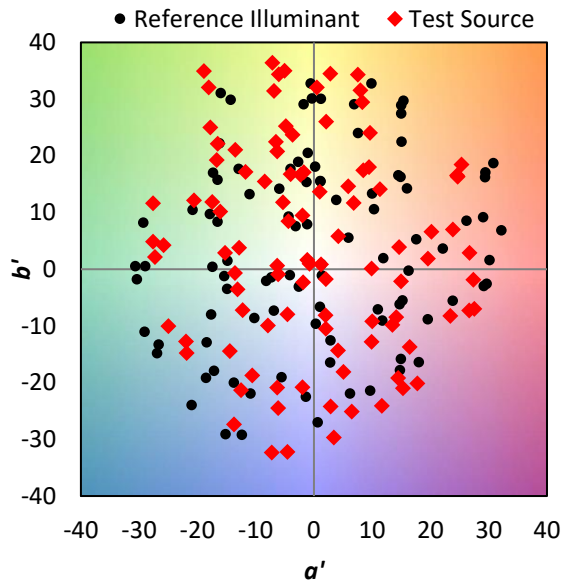


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 52	CES51 = 87	CES76 = 40
CES02 = 59	CES27 = 77	CES52 = 88	CES77 = 62
CES03 = 30	CES28 = 76	CES53 = 74	CES78 = 43
CES04 = 68	CES29 = 46	CES54 = 79	CES79 = 72
CES05 = 45	CES30 = 54	CES55 = 78	CES80 = 68
CES06 = 49	CES31 = 52	CES56 = 67	CES81 = 70
CES07 = 38	CES32 = 49	CES57 = 64	CES82 = 87
CES08 = 37	CES33 = 59	CES58 = 66	CES83 = 81
CES09 = 29	CES34 = 61	CES59 = 87	CES84 = 87
CES10 = 72	CES35 = 78	CES60 = 91	CES85 = 83
CES11 = 55	CES36 = 88	CES61 = 88	CES86 = 75
CES12 = 61	CES37 = 71	CES62 = 77	CES87 = 74
CES13 = 41	CES38 = 64	CES63 = 74	CES88 = 76
CES14 = 74	CES39 = 90	CES64 = 71	CES89 = 75
CES15 = 70	CES40 = 81	CES65 = 63	CES90 = 73
CES16 = 46	CES41 = 82	CES66 = 66	CES91 = 93
CES17 = 48	CES42 = 69	CES67 = 63	CES92 = 69
CES18 = 55	CES43 = 67	CES68 = 71	CES93 = 82
CES19 = 70	CES44 = 98	CES69 = 81	CES94 = 58
CES20 = 63	CES45 = 77	CES70 = 57	CES95 = 72
CES21 = 85	CES46 = 76	CES71 = 54	CES96 = 78
CES22 = 77	CES47 = 73	CES72 = 84	CES97 = 82
CES23 = 91	CES48 = 65	CES73 = 45	CES98 = 70
CES24 = 90	CES49 = 77	CES74 = 92	CES99 = 59
CES25 = 71	CES50 = 85	CES75 = 49	

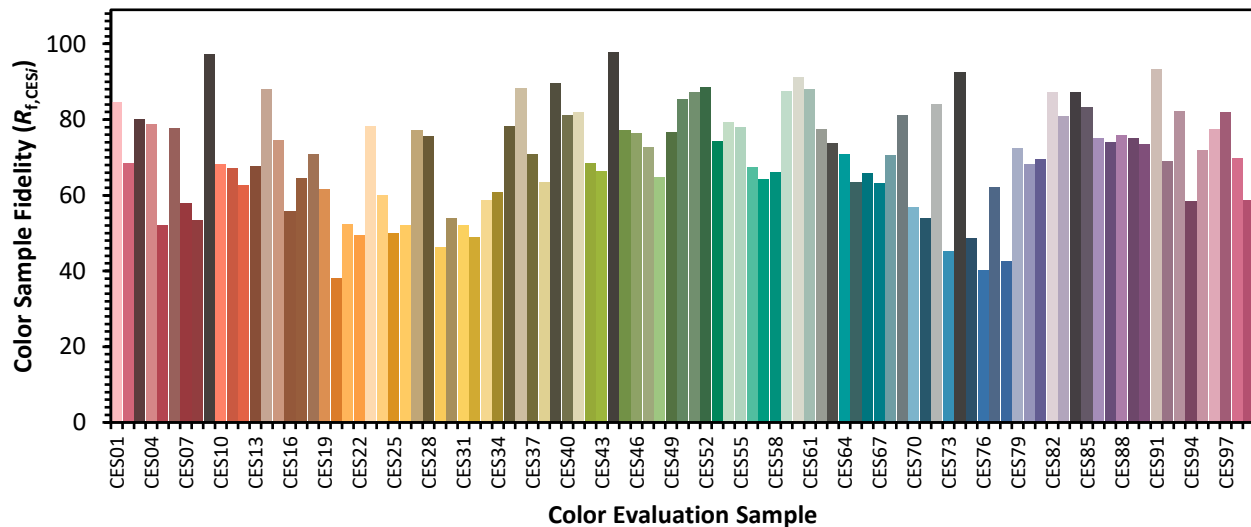

Color Rendition by Hue-Angle Bin

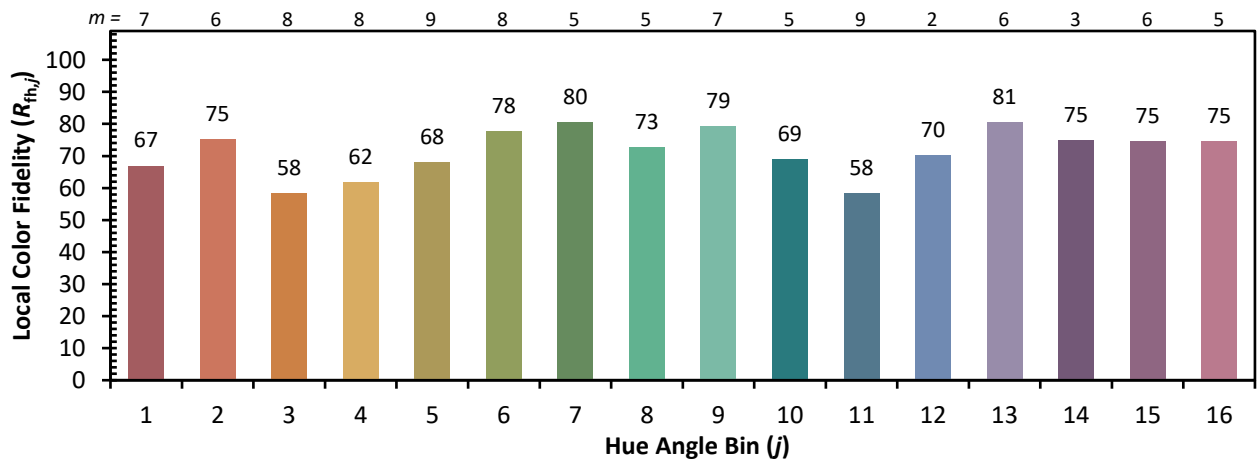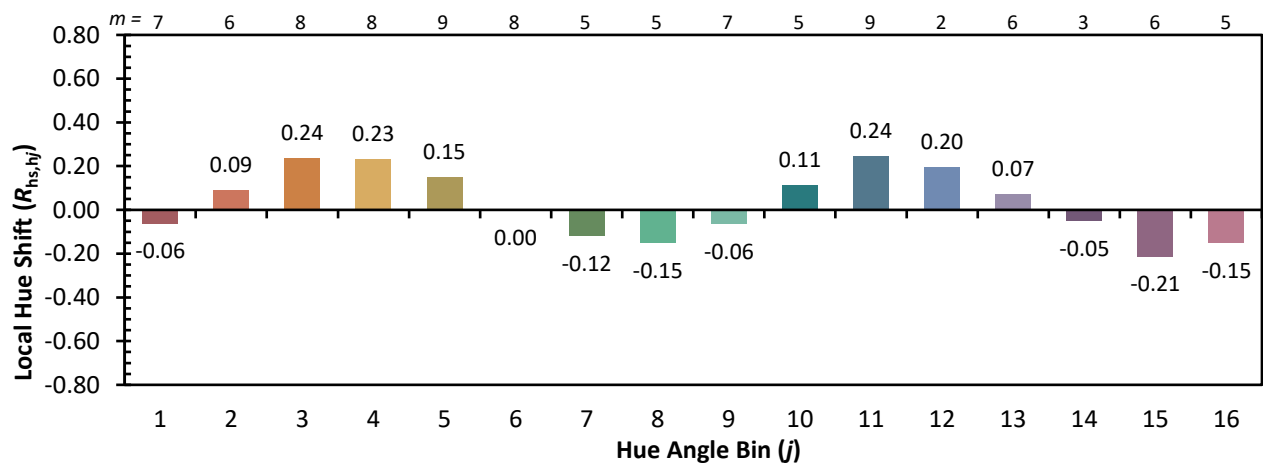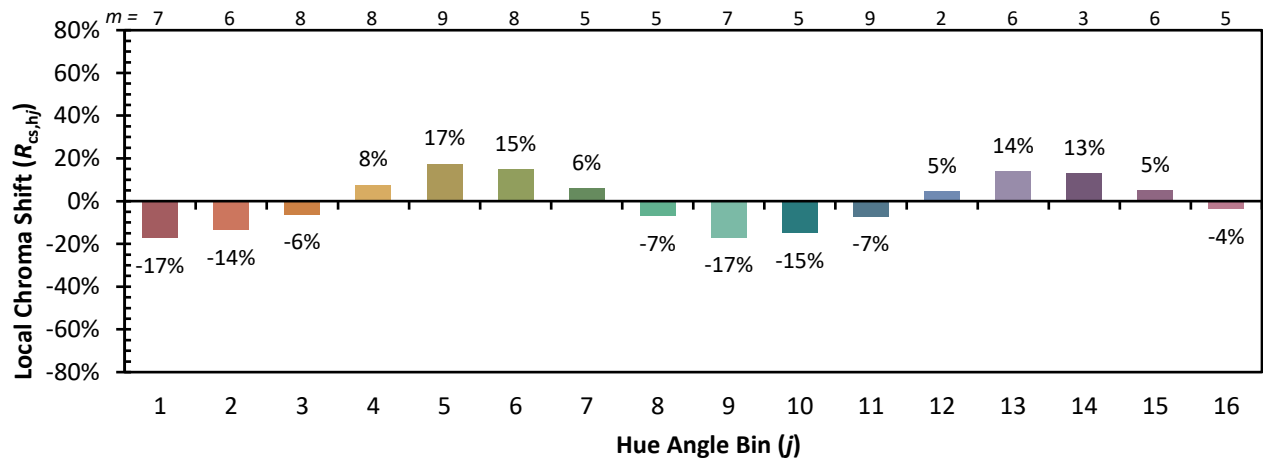

Measure Comparisons

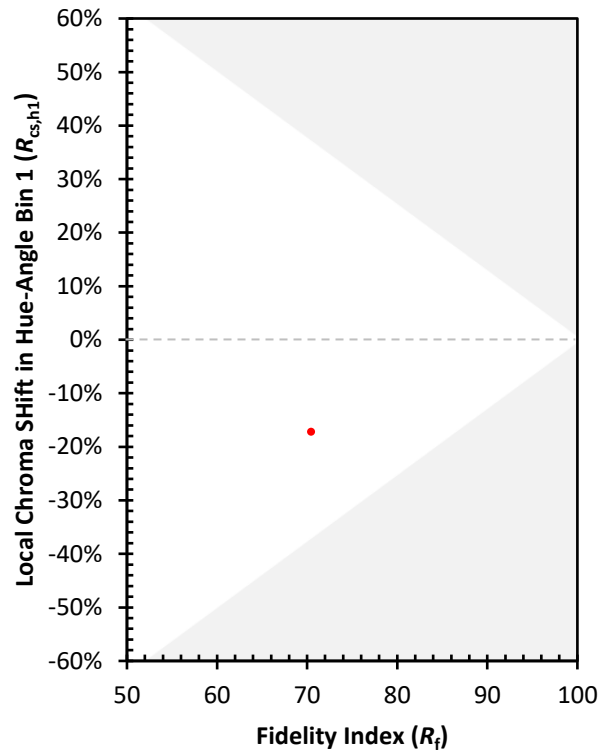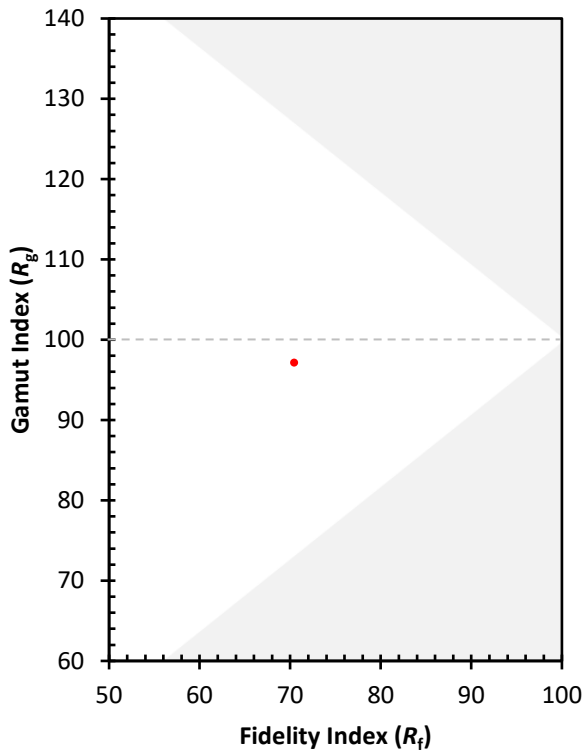

(END OF REPORT)