

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1063037

Luminaire Tested: **GLAN-SA8A-840-U-T3BC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1063037
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SA8A-840-U-T3BC
Description: GALLEON II AREA AND ROADWAY LUMINAIRE 615mA 8xLight Square PACKAGE
80CRI 4000K FIXTURE w/ TYPE III ANGLED BACKLIGHT CONTROL
Light Source: (112) 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 27305.5 lumens
Efficiency: N/A
Efficacy: 125.5 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type III - Short
BUG Rating: B0 - U0 - G4

Input Watts (W): 217.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1063037

CATALOG NUMBER: GLAN-SA8A-840-U-T3BC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
- - - 1/2 Max cd

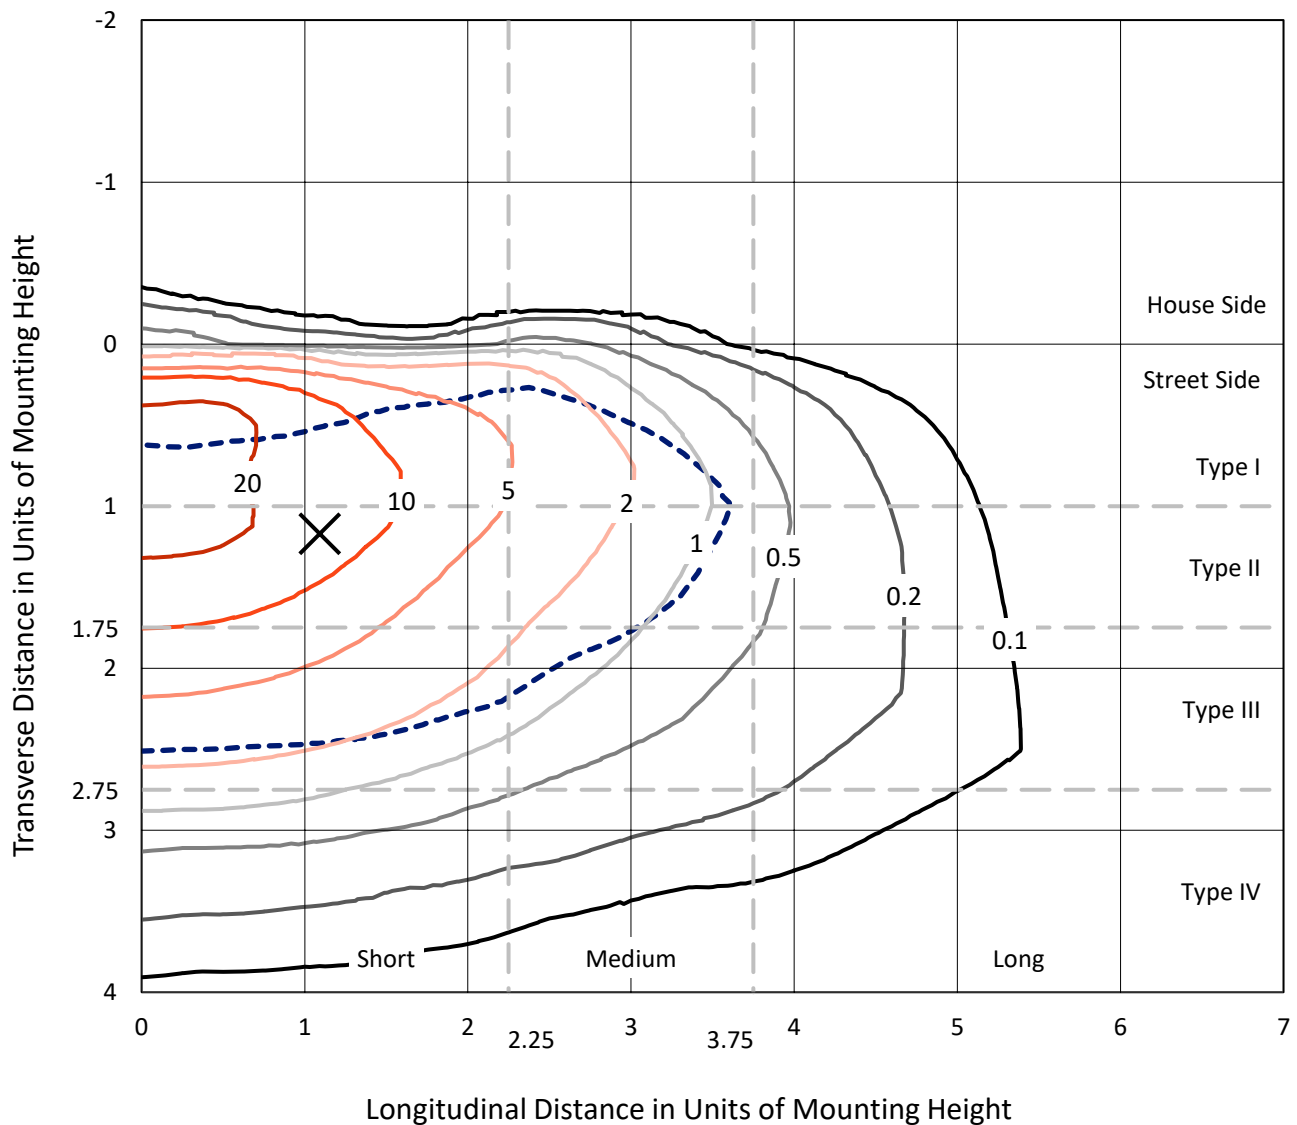


Based on 15 foot mounting height. Maximum calculated value = 30.6 fc
Type III - Short - N/A

REPORT NUMBER: P1063037

CATALOG NUMBER: GLAN-SA8A-840-U-T3BC

Luminous Intensity Polar Plot

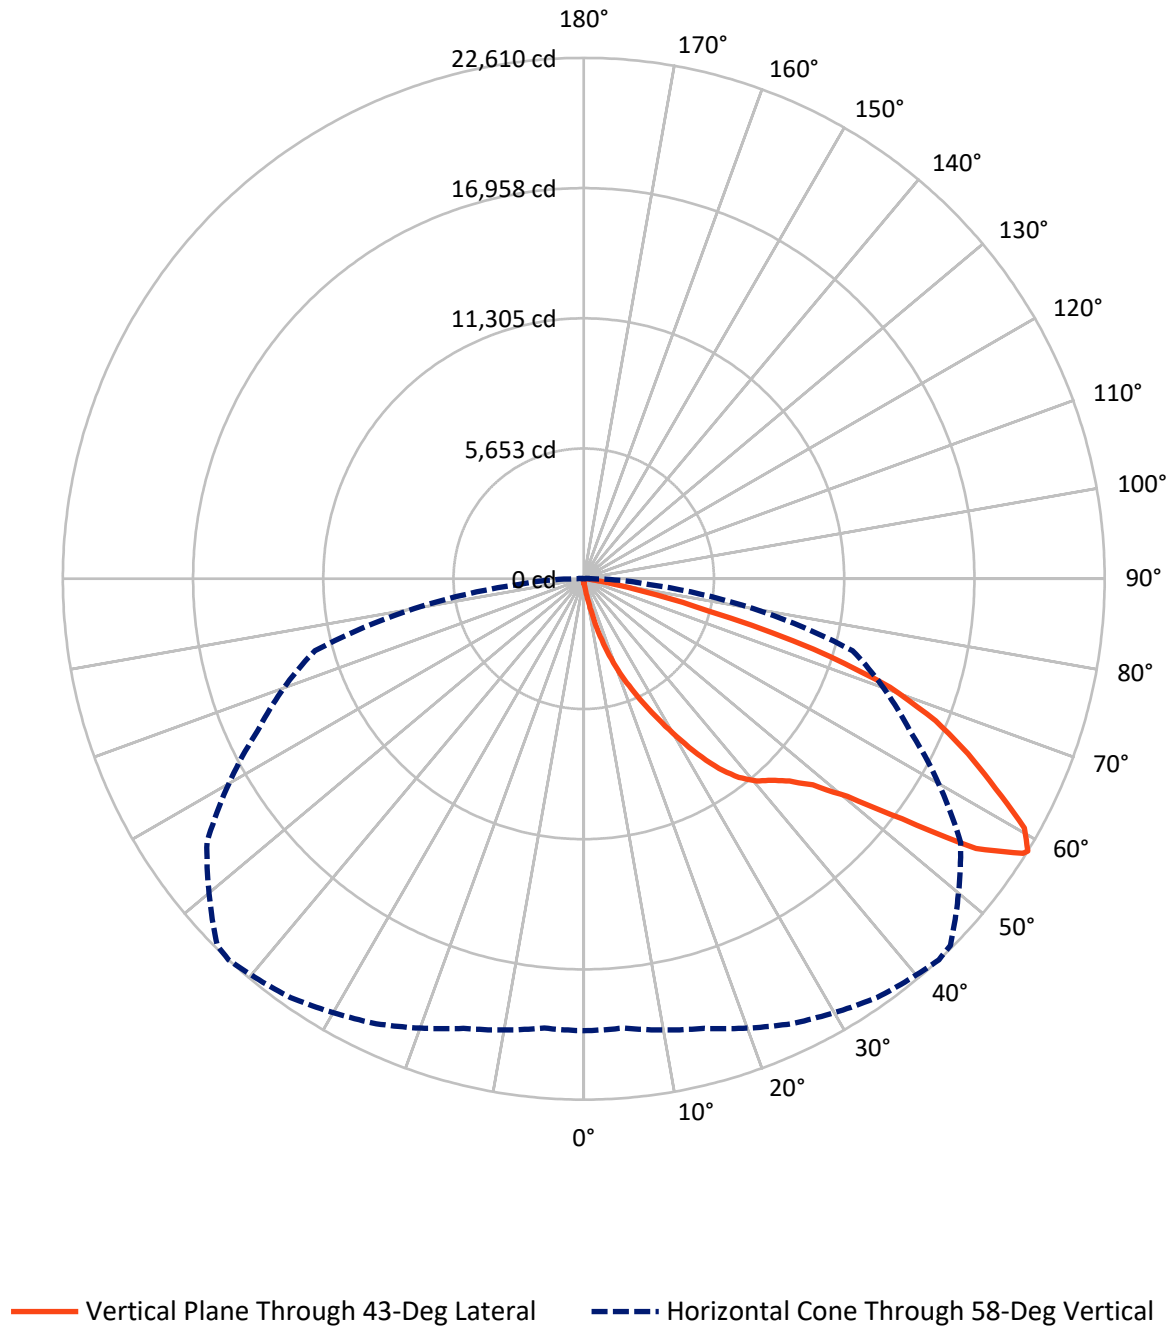

REPORT NUMBER: P1063037

CATALOG NUMBER: GLAN-SA8A-840-U-T3BC


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	99.7	0.0	99.7
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	27205.8	0.0	27205.8
	% Fixture	99.6	0.0	99.6
Total	Lumens	27305.5	0.0	27305.5
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	26.2	0.1
10°-20°	313.9	1.1
20°-30°	1131.3	4.1
30°-40°	2588.4	9.5
40°-50°	4365.6	16.0
50°-60°	7204.3	26.4
60°-70°	8051.8	29.5
70°-80°	3324.4	12.2
80°-90°	299.7	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	27305.5	100.0
0°-180°	27305.5	100.0

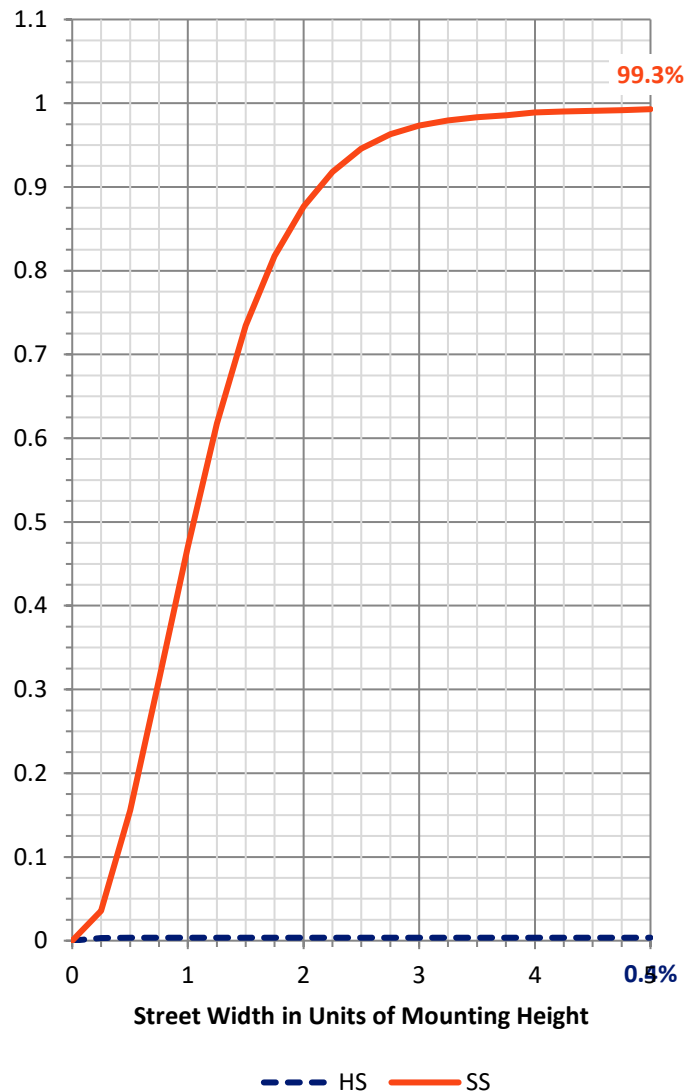

REPORT NUMBER: P1063037


CATALOG NUMBER: GLAN-SA8A-840-U-T3BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1445.3	5.3			
FM	(30°-60°)	14134.4	51.8			
FH	(60°-80°)	11330.5	41.5			G4/12000
FVH	(80°-90°)	295.6	1.1			G3/500
BL	(0°-30°)	26.0	0.1	B0/110		
BM	(30°-60°)	23.9	0.1	B0/220		
BH	(60°-80°)	45.7	0.2	B0/110		G0/110
BVH	(80°-90°)	4.1	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G4

Type III Short

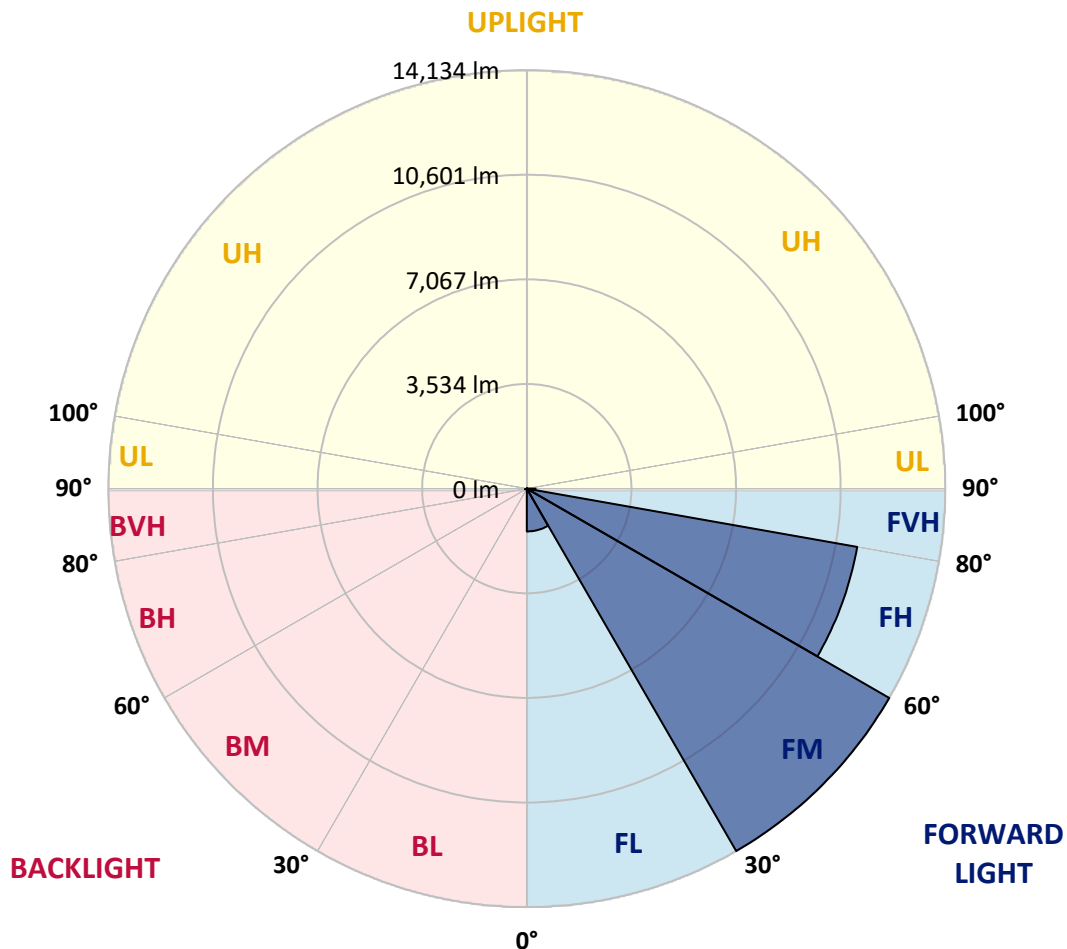

REPORT NUMBER: P1063037

CATALOG NUMBER: GLAN-SA8A-840-U-T3BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	43°	45°	55°	65°	75°	85°
0°	178.5	178.5	178.5	178.5	178.5	178.5	178.5	178.5	178.5	178.5	178.5
2.5°	214.2	221.4	214.2	214.2	214.2	207.1	207.1	200.0	200.0	192.8	185.7
5°	314.2	314.2	292.8	278.5	264.2	257.1	250.0	235.7	221.4	207.1	192.8
7.5°	699.9	699.9	635.6	549.9	435.6	371.4	357.1	292.8	250.0	221.4	192.8
10°	1671.1	1671.1	1528.3	1292.6	999.8	742.7	664.2	421.3	299.9	235.7	200.0
12.5°	2778.0	2813.8	2635.2	2335.3	1899.6	1449.7	1292.6	771.3	399.9	257.1	200.0
15°	3770.7	3685.0	3635.0	3349.4	2935.2	2399.5	2199.6	1299.8	578.5	292.8	200.0
17.5°	4442.0	4442.0	4370.6	4177.8	3799.3	3327.9	3163.7	2099.6	935.5	335.7	207.1
20°	5227.6	5227.6	5099.0	4963.3	4627.7	4227.8	4070.7	2985.1	1449.7	428.5	207.1
22.5°	6177.4	6191.7	6048.9	5806.0	5484.7	5041.9	4906.2	3806.4	2099.6	571.3	214.2
25°	7334.3	7348.6	7141.5	6913.0	6420.2	5941.7	5734.6	4749.1	2892.3	799.8	214.2
27.5°	8612.7	8712.6	8405.6	8012.8	7491.4	6891.6	6734.4	5598.9	3677.9	1128.4	228.5
30°	10205.2	10205.2	9798.1	9248.2	8684.1	7941.4	7741.4	6491.6	4513.4	1564.0	242.8
32.5°	11576.4	11469.3	10947.9	10369.5	9769.6	9076.9	8862.6	7427.2	5370.4	2106.7	271.4
35°	12626.2	12533.3	11890.6	11269.3	10748.0	10112.4	9855.3	8441.3	6277.4	2720.9	314.2
37.5°	13526.0	13490.3	12619.0	11840.6	11497.8	10940.8	10712.3	9398.2	7170.1	3385.1	364.2
40°	14511.5	14397.3	13468.9	12504.8	11990.6	11540.7	11333.6	10169.5	8027.1	4163.5	435.6
42.5°	15354.2	15218.5	14383.0	13440.3	12561.9	11954.9	11754.9	10819.4	8862.6	4941.9	528.5
45°	16289.8	16218.4	15375.7	14661.5	13490.3	12519.1	12254.8	11340.7	9626.7	5870.3	649.9
47.5°	17696.6	17568.1	16782.5	16196.9	14840.0	13376.0	12997.5	11876.3	10362.3	6784.4	835.6
50°	19332.1	19246.4	18782.2	18318.0	16968.2	14840.0	14390.1	12647.6	11183.6	7869.9	1078.4
52.5°	20667.5	20653.2	20710.4	20717.5	19696.3	17303.9	16632.6	13890.2	12126.3	8941.2	1421.2
55°	20638.9	20703.2	21331.7	22053.0	22131.5	20667.5	20017.6	15982.7	13354.6	10262.3	1899.6
57.5°	19867.7	19817.7	20481.8	21567.3	22331.5	22488.6	22381.5	19232.1	15204.3	11854.9	2635.2
58°	19617.7	19574.9	20203.3	21310.3	22188.7	22610.0	22502.9	19967.6	15618.5	12083.4	2835.2
60°	18710.7	18717.9	19089.2	20096.2	20974.6	21974.4	22074.4	22067.3	17682.4	13611.7	3842.1
62.5°	17511.0	17453.8	17796.6	18617.9	19389.2	20060.5	20231.9	22210.1	20703.2	15554.2	5763.2
65°	15854.1	15768.4	16132.7	17061.1	17889.5	18325.1	18332.2	20296.2	22124.4	17639.5	8505.5
67.5°	12776.2	12704.7	13433.2	14625.8	15904.1	16475.5	16732.5	17611.0	20924.6	19053.5	10076.7
70°	7827.1	7977.1	8991.2	10862.2	13047.5	14097.3	14483.0	14754.3	17818.1	18839.3	8427.0
72.5°	3613.6	3435.1	4299.2	5606.1	8098.5	10433.7	10833.7	11897.7	14125.9	16354.0	6284.5
75°	1685.4	1621.1	1821.1	2449.5	3670.7	5634.6	6363.1	9498.2	10833.7	11376.4	4534.9
77.5°	864.1	871.3	1035.5	1114.1	1514.0	2606.6	2992.3	6248.8	7941.4	6348.8	3042.3
80°	378.5	392.8	399.9	435.6	614.2	1007.0	1135.5	2899.5	5427.5	3235.1	1664.0
82.5°	242.8	250.0	250.0	250.0	292.8	399.9	457.1	1164.1	2706.6	1606.8	514.2
85°	128.5	128.5	142.8	178.5	207.1	242.8	257.1	371.4	892.7	478.5	121.4
87.5°	71.4	78.6	85.7	107.1	135.7	164.3	178.5	257.1	342.8	328.5	28.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1063037

CATALOG NUMBER: GLAN-SA8A-840-U-T3BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	178.5	178.5	178.5	178.5	178.5	178.5	178.5	178.5	178.5	178.5	178.5
2.5°	185.7	178.5	171.4	164.3	157.1	150.0	150.0	150.0	150.0	150.0	150.0
5°	178.5	171.4	164.3	150.0	135.7	128.5	121.4	114.3	114.3	114.3	114.3
7.5°	178.5	171.4	150.0	135.7	121.4	107.1	92.8	92.8	92.8	92.8	92.8
10°	178.5	164.3	142.8	121.4	100.0	85.7	78.6	71.4	71.4	71.4	71.4
12.5°	178.5	157.1	135.7	107.1	85.7	71.4	64.3	57.1	57.1	57.1	57.1
15°	178.5	157.1	128.5	100.0	78.6	57.1	50.0	42.8	42.8	42.8	42.8
17.5°	171.4	150.0	121.4	85.7	64.3	42.8	35.7	28.6	28.6	35.7	35.7
20°	164.3	142.8	107.1	71.4	50.0	35.7	21.4	21.4	21.4	21.4	21.4
22.5°	164.3	142.8	100.0	64.3	42.8	21.4	14.3	14.3	14.3	14.3	21.4
25°	164.3	135.7	85.7	50.0	28.6	14.3	7.1	7.1	7.1	7.1	7.1
27.5°	164.3	135.7	78.6	42.8	21.4	14.3	7.1	0.0	0.0	0.0	0.0
30°	157.1	128.5	71.4	35.7	14.3	7.1	0.0	0.0	0.0	0.0	0.0
32.5°	157.1	121.4	57.1	28.6	14.3	7.1	0.0	0.0	0.0	0.0	0.0
35°	164.3	114.3	50.0	21.4	7.1	0.0	0.0	0.0	0.0	0.0	7.1
37.5°	171.4	107.1	42.8	14.3	7.1	0.0	0.0	0.0	0.0	0.0	0.0
40°	178.5	100.0	42.8	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	192.8	100.0	35.7	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	207.1	100.0	28.6	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	235.7	107.1	28.6	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	257.1	114.3	21.4	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	285.7	107.1	21.4	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	321.4	107.1	21.4	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	349.9	100.0	21.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	364.2	92.8	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	435.6	85.7	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	678.4	71.4	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	1378.3	64.3	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	2570.9	57.1	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	2878.0	64.3	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	1813.9	50.0	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	957.0	50.0	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	478.5	50.0	7.1	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	221.4	35.7	7.1	7.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	92.8	21.4	14.3	7.1	7.1	0.0	0.0	0.0	0.0	0.0	0.0
85°	42.8	21.4	14.3	14.3	7.1	7.1	0.0	0.0	0.0	0.0	0.0
87.5°	21.4	21.4	21.4	14.3	14.3	7.1	7.1	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-11

Test Date: 10/11/2024

Luminaire Tested: GSS-SB1A-840-U-5WQ

Data in this report applies to families of products including GSS-SB1A-840-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-11
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-840-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 80 CRI 4000K CCT 26 LEDS

Spectral Parameters

CCT (K): 3897
 CIE u' : 0.2249
 CIE v' : 0.5084
 Duv: 0.0039
 CIE x: 0.3882
 CIE y: 0.3900
 CIE z: 0.2218
 Peak Wavelength (nm): 445
 Dominant Wavelength (nm): 577
 Purity: 33.54925
 R_f: 81.8
 R_g: 98.6

CRI (Ra): 80.2
 R1: 78.9
 R2: 83.5
 R3: 88.3
 R4: 82.1
 R5: 78.8
 R6: 78.4
 R7: 85.8
 R8: 65.8
 R9: 6.7
 R10: 61.9
 R11: 81.9
 R12: 58.9
 R13: 79.2
 R14: 93.2
 R15: 71.9



Test Conditions

Stabilization Time: 24M
 Operation Time: 1H 24M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-11


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-11

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

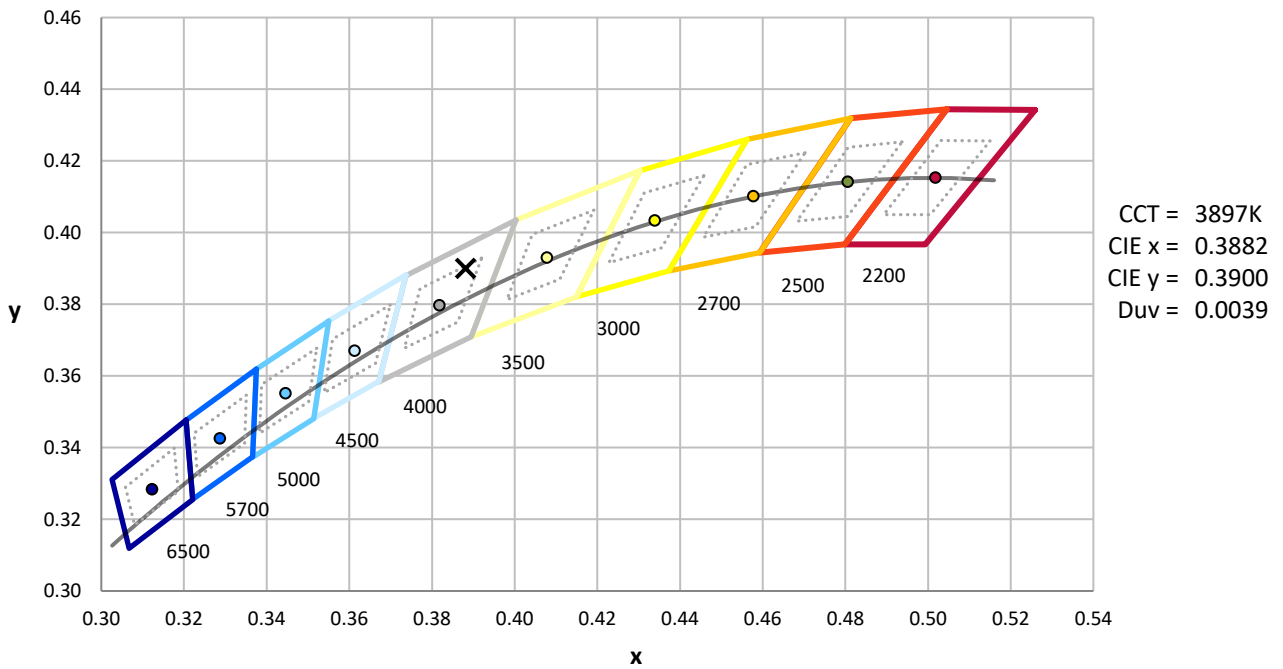

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-11

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	242	NR	620	792	NR	750	29	NR	880	1	NR
365	0	NR	495	320	NR	625	748	NR	755	25	NR	885	1	NR
370	0	NR	500	401	NR	630	703	NR	760	22	NR	890	1	NR
375	0	NR	505	479	NR	635	651	NR	765	19	NR	895	1	NR
380	0	NR	510	546	NR	640	599	NR	770	16	NR	900	1	NR
385	0	NR	515	602	NR	645	545	NR	775	14	NR	905	0	NR
390	2	NR	520	645	NR	650	493	NR	780	12	NR	910	0	NR
395	4	NR	525	674	NR	655	443	NR	785	10	NR	915	0	NR
400	6	NR	530	699	NR	660	394	NR	790	9	NR	920	0	NR
405	11	NR	535	718	NR	665	349	NR	795	8	NR	925	0	NR
410	22	NR	540	732	NR	670	307	NR	800	7	NR	930	0	NR
415	43	NR	545	749	NR	675	269	NR	805	6	NR	935	0	NR
420	86	NR	550	762	NR	680	235	NR	810	5	NR	940	0	NR
425	164	NR	555	778	NR	685	204	NR	815	5	NR	945	0	NR
430	288	NR	560	792	NR	690	178	NR	820	4	NR	950	0	NR
435	478	NR	565	809	NR	695	153	NR	825	3	NR	955	0	NR
440	766	NR	570	827	NR	700	132	NR	830	3	NR	960	0	NR
445	1000	NR	575	845	NR	705	114	NR	835	3	NR	965	0	NR
450	726	NR	580	862	NR	710	98	NR	840	2	NR	970	0	NR
455	425	NR	585	875	NR	715	84	NR	845	2	NR	975	0	NR
460	324	NR	590	887	NR	720	73	NR	850	2	NR	980	0	NR
465	225	NR	595	890	NR	725	63	NR	855	1	NR	985	0	NR
470	157	NR	600	887	NR	730	54	NR	860	1	NR	990	0	NR
475	147	NR	605	875	NR	735	46	NR	865	1	NR	995	0	NR
480	154	NR	610	856	NR	740	40	NR	870	1	NR	1000	0	NR
485	184	NR	615	828	NR	745	34	NR	875	1	NR			

REPORT NUMBER: SP1-2407-184-11

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.57

λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)
360	0	NR	490	242	NR	620	792	NR	750	29	NR	880	1	NR
365	0	NR	495	320	NR	625	748	NR	755	25	NR	885	1	NR
370	0	NR	500	401	NR	630	703	NR	760	22	NR	890	1	NR
375	0	NR	505	479	NR	635	651	NR	765	19	NR	895	1	NR
380	0	NR	510	546	NR	640	599	NR	770	16	NR	900	1	NR
385	0	NR	515	602	NR	645	545	NR	775	14	NR	905	0	NR
390	2	NR	520	645	NR	650	493	NR	780	12	NR	910	0	NR
395	4	NR	525	674	NR	655	443	NR	785	10	NR	915	0	NR
400	6	NR	530	699	NR	660	394	NR	790	9	NR	920	0	NR
405	11	NR	535	718	NR	665	349	NR	795	8	NR	925	0	NR
410	22	NR	540	732	NR	670	307	NR	800	7	NR	930	0	NR
415	43	NR	545	749	NR	675	269	NR	805	6	NR	935	0	NR
420	86	NR	550	762	NR	680	235	NR	810	5	NR	940	0	NR
425	164	NR	555	778	NR	685	204	NR	815	5	NR	945	0	NR
430	288	NR	560	792	NR	690	178	NR	820	4	NR	950	0	NR
435	478	NR	565	809	NR	695	153	NR	825	3	NR	955	0	NR
440	766	NR	570	827	NR	700	132	NR	830	3	NR	960	0	NR
445	1000	NR	575	845	NR	705	114	NR	835	3	NR	965	0	NR
450	726	NR	580	862	NR	710	98	NR	840	2	NR	970	0	NR
455	425	NR	585	875	NR	715	84	NR	845	2	NR	975	0	NR
460	324	NR	590	887	NR	720	73	NR	850	2	NR	980	0	NR
465	225	NR	595	890	NR	725	63	NR	855	1	NR	985	0	NR
470	157	NR	600	887	NR	730	54	NR	860	1	NR	990	0	NR
475	147	NR	605	875	NR	735	46	NR	865	1	NR	995	0	NR
480	154	NR	610	856	NR	740	40	NR	870	1	NR	1000	0	NR
485	184	NR	615	828	NR	745	34	NR	875	1	NR			

REPORT NUMBER: SP1-2407-184-11

Melanopic Flux vs. Wavelength


Melanopic Lumens: NR
M/P: 3.06


λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	242	NR	620	792	NR	750	29	NR	880	1	NR
365	0	NR	495	320	NR	625	748	NR	755	25	NR	885	1	NR
370	0	NR	500	401	NR	630	703	NR	760	22	NR	890	1	NR
375	0	NR	505	479	NR	635	651	NR	765	19	NR	895	1	NR
380	0	NR	510	546	NR	640	599	NR	770	16	NR	900	1	NR
385	0	NR	515	602	NR	645	545	NR	775	14	NR	905	0	NR
390	2	NR	520	645	NR	650	493	NR	780	12	NR	910	0	NR
395	4	NR	525	674	NR	655	443	NR	785	10	NR	915	0	NR
400	6	NR	530	699	NR	660	394	NR	790	9	NR	920	0	NR
405	11	NR	535	718	NR	665	349	NR	795	8	NR	925	0	NR
410	22	NR	540	732	NR	670	307	NR	800	7	NR	930	0	NR
415	43	NR	545	749	NR	675	269	NR	805	6	NR	935	0	NR
420	86	NR	550	762	NR	680	235	NR	810	5	NR	940	0	NR
425	164	NR	555	778	NR	685	204	NR	815	5	NR	945	0	NR
430	288	NR	560	792	NR	690	178	NR	820	4	NR	950	0	NR
435	478	NR	565	809	NR	695	153	NR	825	3	NR	955	0	NR
440	766	NR	570	827	NR	700	132	NR	830	3	NR	960	0	NR
445	1000	NR	575	845	NR	705	114	NR	835	3	NR	965	0	NR
450	726	NR	580	862	NR	710	98	NR	840	2	NR	970	0	NR
455	425	NR	585	875	NR	715	84	NR	845	2	NR	975	0	NR
460	324	NR	590	887	NR	720	73	NR	850	2	NR	980	0	NR
465	225	NR	595	890	NR	725	63	NR	855	1	NR	985	0	NR
470	157	NR	600	887	NR	730	54	NR	860	1	NR	990	0	NR
475	147	NR	605	875	NR	735	46	NR	865	1	NR	995	0	NR
480	154	NR	610	856	NR	740	40	NR	870	1	NR	1000	0	NR
485	184	NR	615	828	NR	745	34	NR	875	1	NR			

REPORT NUMBER: SP1-2407-184-11




TM-30-18

Summary

$R_f = 81.8$
 $R_g = 98.6$
 $CIE R_a = 80.2$
 $R_9 = 6.7$

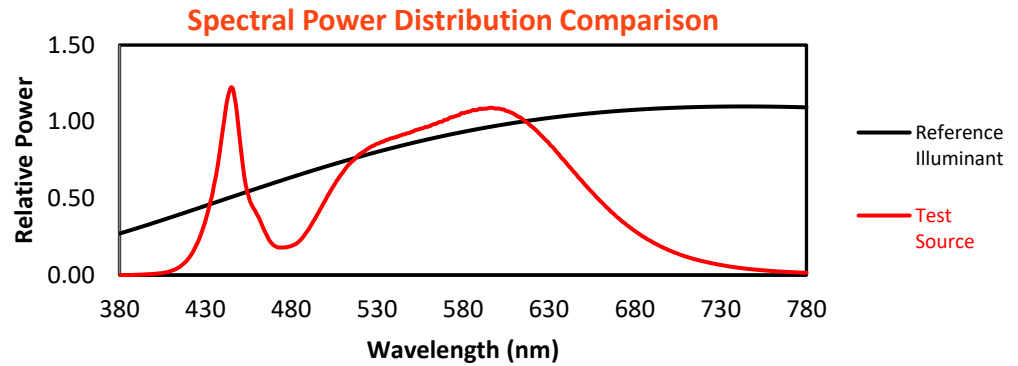

Color Vector Graphics

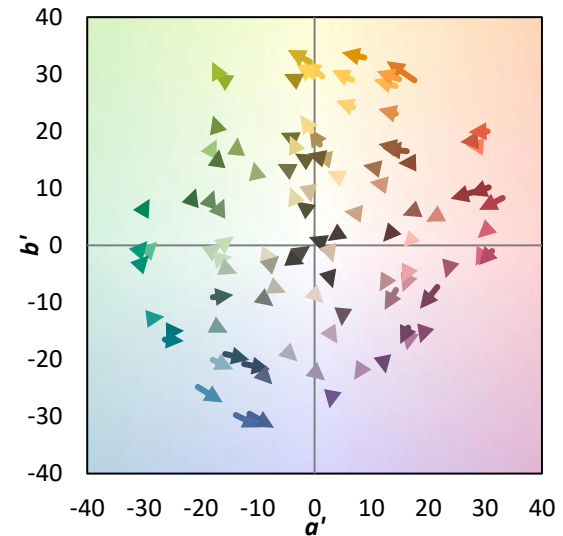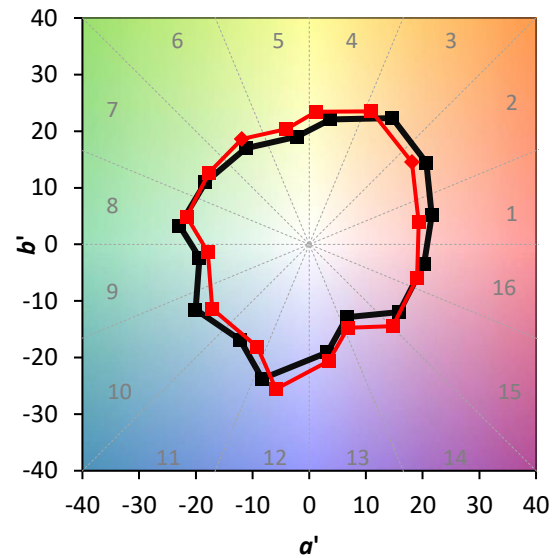
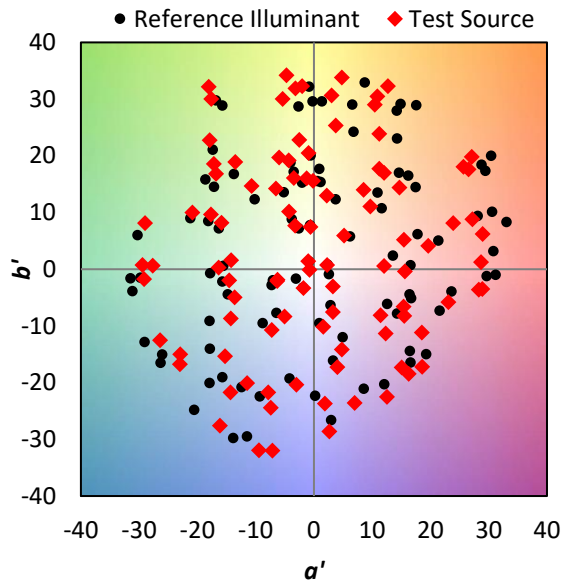


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 73	CES51 = 93	CES76 = 66
CES02 = 61	CES27 = 91	CES52 = 93	CES77 = 80
CES03 = 31	CES28 = 87	CES53 = 83	CES78 = 66
CES04 = 69	CES29 = 71	CES54 = 89	CES79 = 88
CES05 = 48	CES30 = 77	CES55 = 88	CES80 = 85
CES06 = 50	CES31 = 74	CES56 = 80	CES81 = 83
CES07 = 41	CES32 = 70	CES57 = 79	CES82 = 93
CES08 = 40	CES33 = 77	CES58 = 80	CES83 = 91
CES09 = 29	CES34 = 79	CES59 = 92	CES84 = 91
CES10 = 74	CES35 = 88	CES60 = 95	CES85 = 84
CES11 = 57	CES36 = 98	CES61 = 91	CES86 = 78
CES12 = 63	CES37 = 85	CES62 = 90	CES87 = 84
CES13 = 42	CES38 = 85	CES63 = 81	CES88 = 85
CES14 = 74	CES39 = 95	CES64 = 81	CES89 = 78
CES15 = 71	CES40 = 90	CES65 = 76	CES90 = 84
CES16 = 47	CES41 = 90	CES66 = 78	CES91 = 85
CES17 = 49	CES42 = 84	CES67 = 76	CES92 = 71
CES18 = 56	CES43 = 81	CES68 = 80	CES93 = 84
CES19 = 71	CES44 = 99	CES69 = 86	CES94 = 65
CES20 = 65	CES45 = 87	CES70 = 73	CES95 = 77
CES21 = 86	CES46 = 85	CES71 = 70	CES96 = 83
CES22 = 78	CES47 = 84	CES72 = 90	CES97 = 87
CES23 = 91	CES48 = 79	CES73 = 65	CES98 = 81
CES24 = 90	CES49 = 84	CES74 = 98	CES99 = 75
CES25 = 71	CES50 = 91	CES75 = 68	



Color Rendition by Hue-Angle Bin

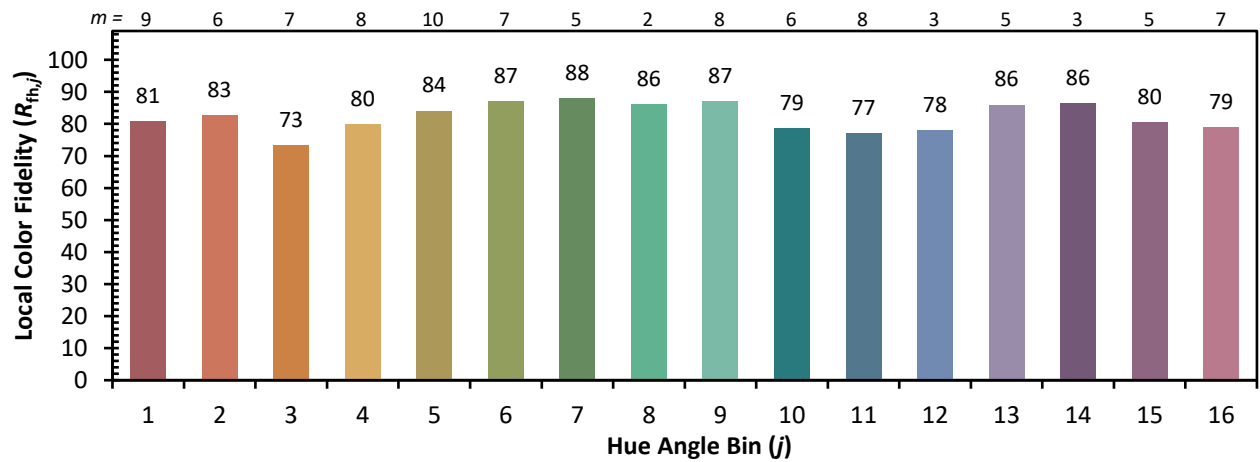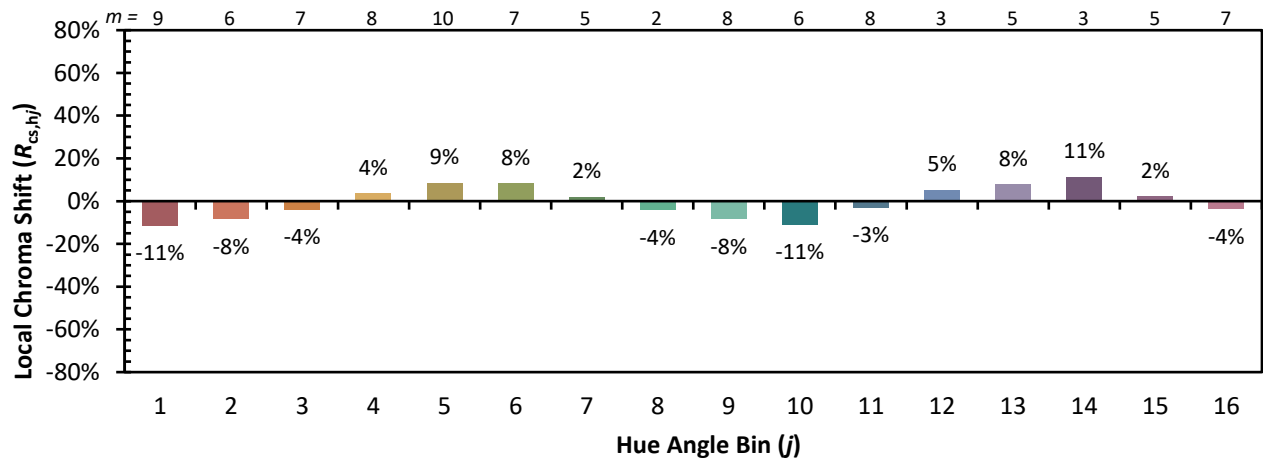

Measure Comparisons

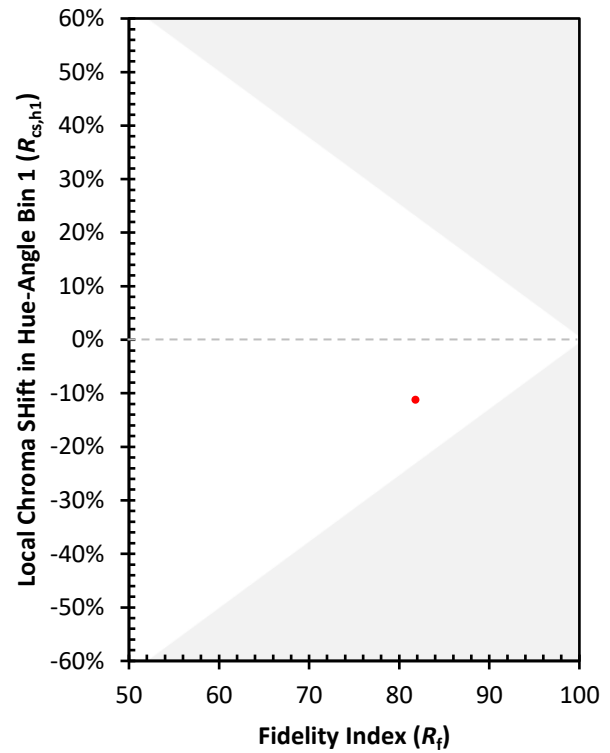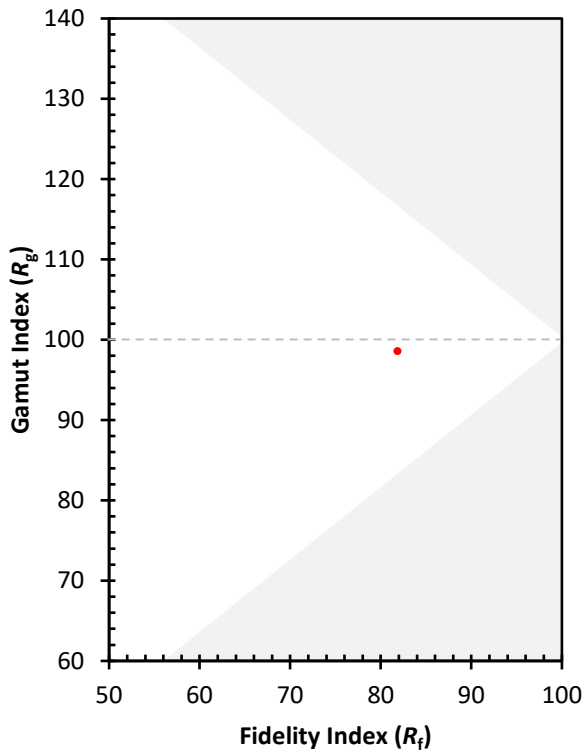

(END OF REPORT)