

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1063175

Luminaire Tested: **GLAN-SA6C-935-U-T3BC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1063175
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SA6C-935-U-T3BC
Description: GALLEON II AREA AND ROADWAY LUMINAIRE 1050mA 6xLight Square PACKAGE
90CRI 3500K FIXTURE w/ TYPE III ANGLED BACKLIGHT CONTROL
Light Source: (84) 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 25439.3 lumens
Efficiency: N/A
Efficacy: 90.1 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type III - Short
BUG Rating: B0 - U0 - G4

Input Watts (W): 282.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1063175

CATALOG NUMBER: GLAN-SA6C-935-U-T3BC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 - - - 1/2 Max cd

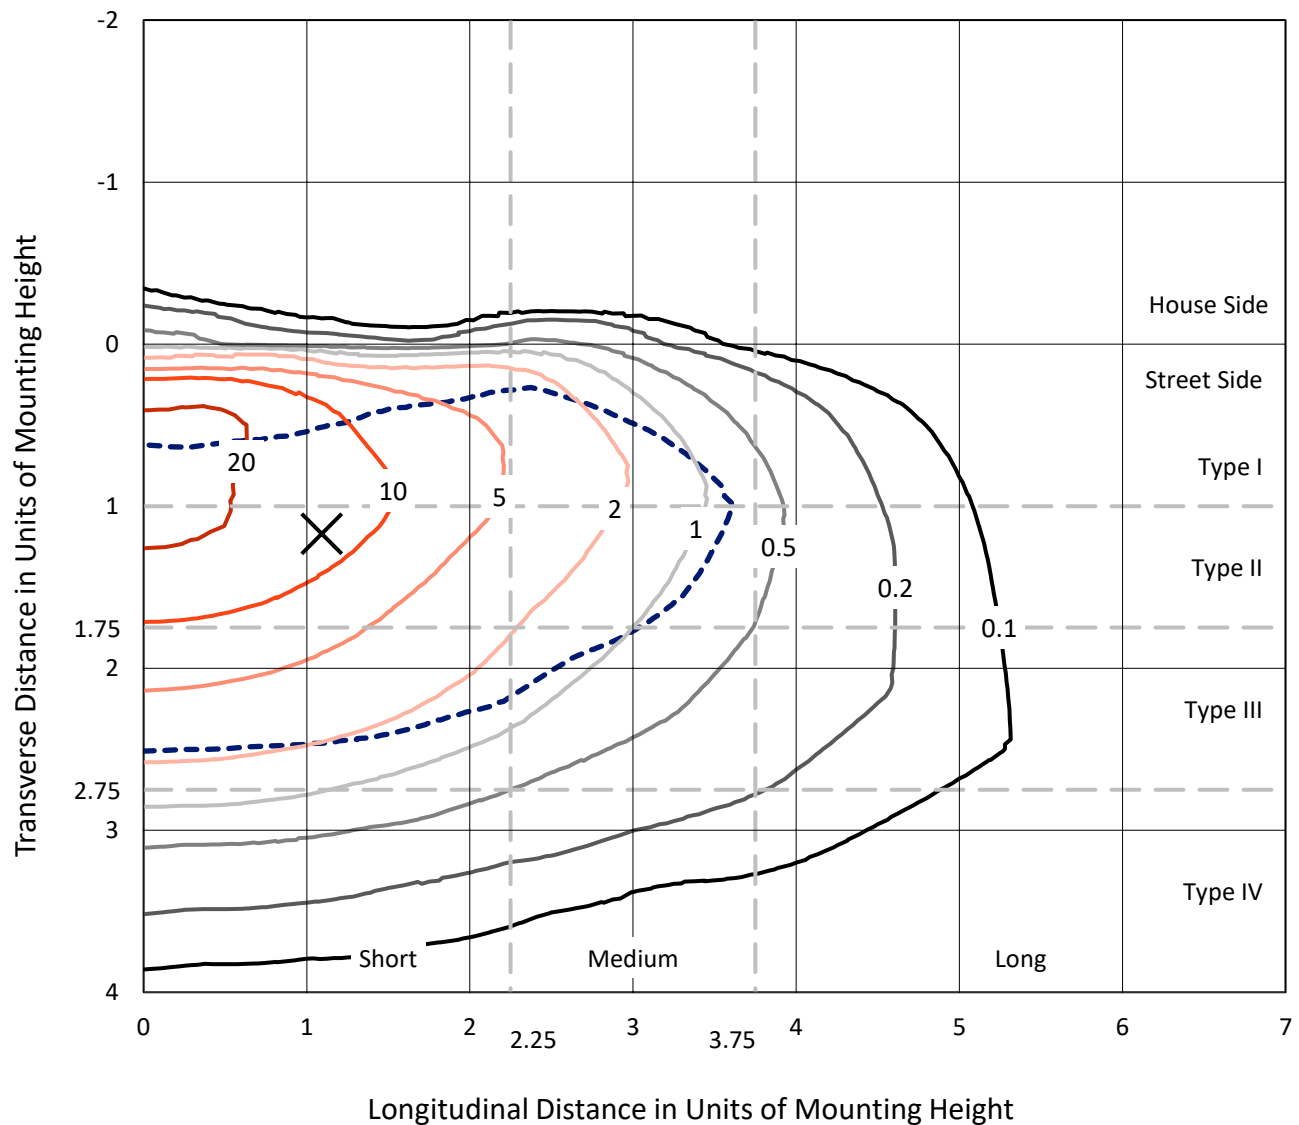


Based on 15 foot mounting height. Maximum calculated value = 28.5 fc
 Type III - Short - N/A

REPORT NUMBER: P1063175

CATALOG NUMBER: GLAN-SA6C-935-U-T3BC

Luminous Intensity Polar Plot

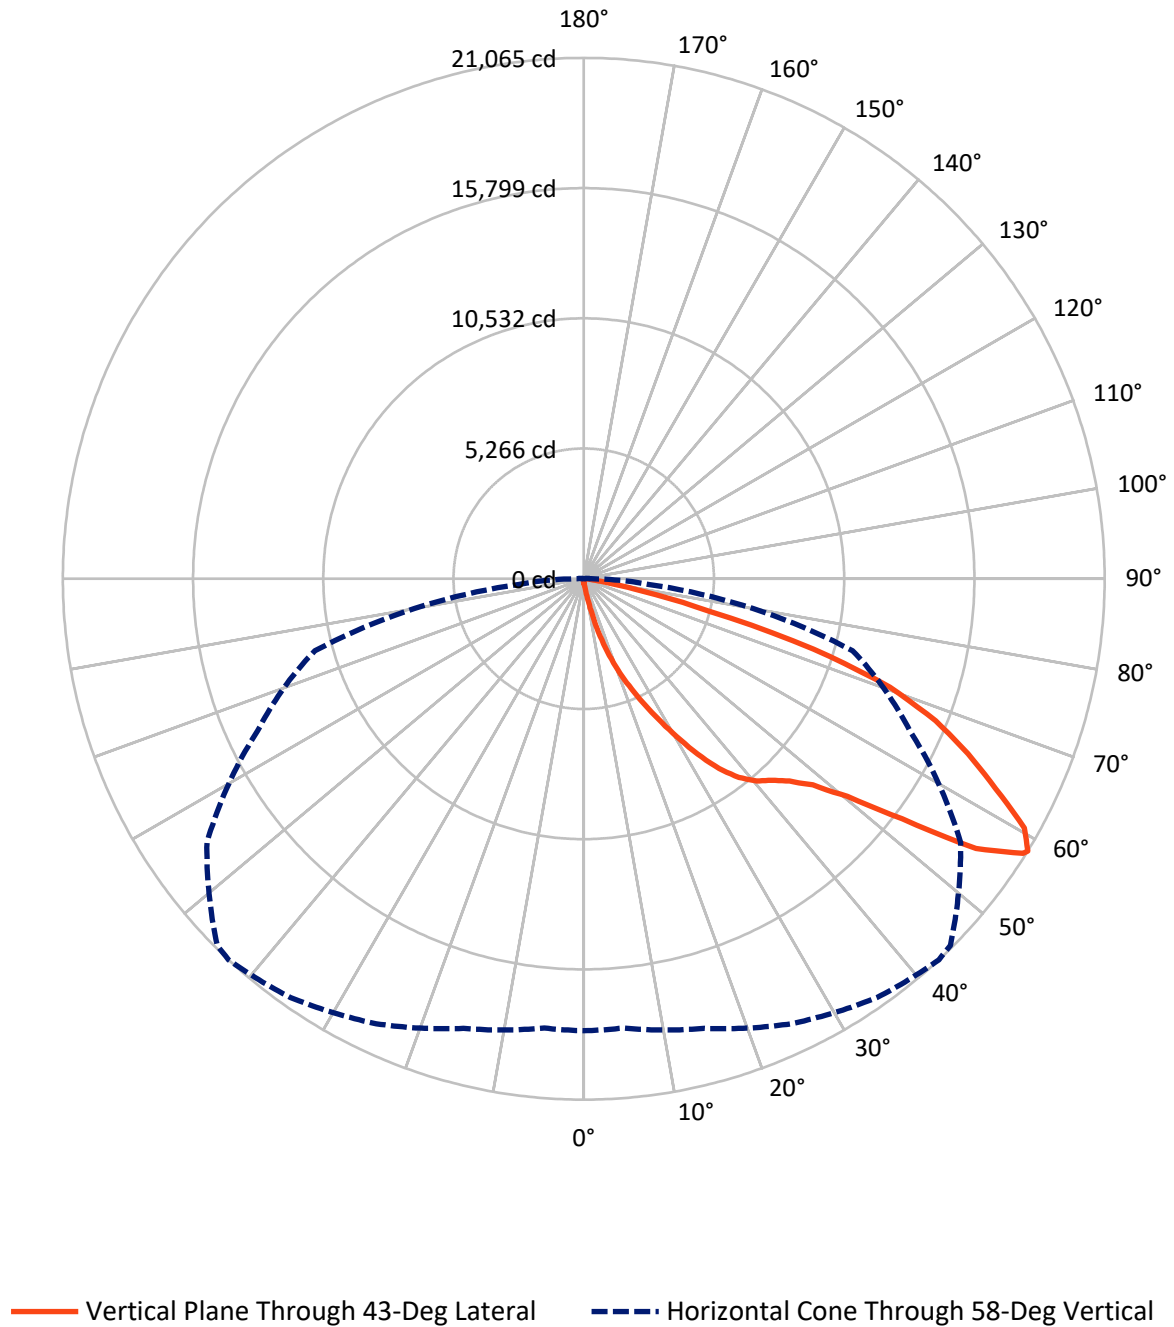

REPORT NUMBER: P1063175

CATALOG NUMBER: GLAN-SA6C-935-U-T3BC

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	92.9	0.0	92.9
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	25346.4	0.0	25346.4
	% Fixture	99.6	0.0	99.6
Total	Lumens	25439.3	0.0	25439.3
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	24.4	0.1
10°-20°	292.4	1.1
20°-30°	1054.0	4.1
30°-40°	2411.5	9.5
40°-50°	4067.2	16.0
50°-60°	6711.9	26.4
60°-70°	7501.5	29.5
70°-80°	3097.2	12.2
80°-90°	279.2	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	25439.3	100.0
0°-180°	25439.3	100.0



REPORT NUMBER: P1063175


CATALOG NUMBER: GLAN-SA6C-935-U-T3BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1346.5	5.3			
FM	(30°-60°)	13168.4	51.8			
FH	(60°-80°)	10556.1	41.5			G4/12000
FVH	(80°-90°)	275.4	1.1			G3/500
BL	(0°-30°)	24.2	0.1	B0/110		
BM	(30°-60°)	22.3	0.1	B0/220		
BH	(60°-80°)	42.6	0.2	B0/110		G0/110
BVH	(80°-90°)	3.8	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G4

Type III Short

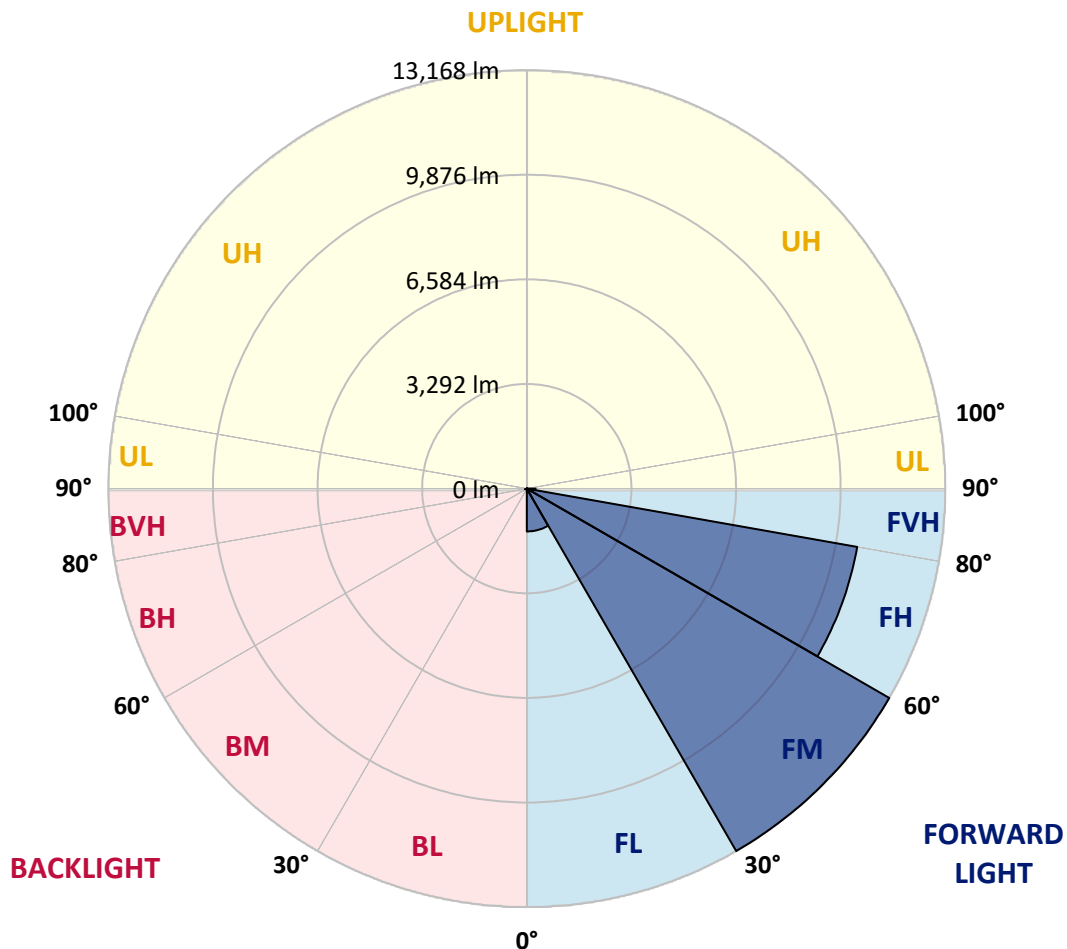

REPORT NUMBER: P1063175

CATALOG NUMBER: GLAN-SA6C-935-U-T3BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	43°	45°	55°	65°	75°	85°
0°	166.3	166.3	166.3	166.3	166.3	166.3	166.3	166.3	166.3	166.3	166.3
2.5°	199.6	206.3	199.6	199.6	199.6	192.9	192.9	186.3	186.3	179.6	173.0
5°	292.8	292.8	272.8	259.5	246.2	239.5	232.9	219.6	206.3	192.9	179.6
7.5°	652.0	652.0	592.2	512.3	405.9	346.0	332.7	272.8	232.9	206.3	179.6
10°	1556.9	1556.9	1423.8	1204.3	931.5	692.0	618.8	392.6	279.4	219.6	186.3
12.5°	2588.2	2621.4	2455.1	2175.7	1769.8	1350.6	1204.3	718.6	372.6	239.5	186.3
15°	3513.0	3433.2	3386.6	3120.5	2734.6	2235.6	2049.3	1210.9	538.9	272.8	186.3
17.5°	4138.4	4138.4	4071.9	3892.3	3539.6	3100.5	2947.5	1956.1	871.6	312.7	192.9
20°	4870.3	4870.3	4750.5	4624.1	4311.4	3938.8	3792.5	2781.1	1350.6	399.2	192.9
22.5°	5755.2	5768.5	5635.5	5409.2	5109.8	4697.3	4570.9	3546.3	1956.1	532.3	199.6
25°	6833.1	6846.4	6653.4	6440.5	5981.4	5535.7	5342.7	4424.5	2694.6	745.2	199.6
27.5°	8024.0	8117.2	7831.1	7465.1	6979.4	6420.6	6274.2	5216.3	3426.5	1051.2	212.9
30°	9507.7	9507.7	9128.5	8616.2	8090.6	7398.6	7212.3	6048.0	4205.0	1457.1	226.2
32.5°	10785.2	10685.4	10199.7	9660.8	9101.9	8456.5	8256.9	6919.6	5003.4	1962.8	252.8
35°	11763.3	11676.8	11078.0	10499.1	10013.4	9421.3	9181.7	7864.3	5848.4	2535.0	292.8
37.5°	12601.6	12568.3	11756.6	11031.4	10712.0	10193.0	9980.1	8755.9	6680.0	3153.7	339.3
40°	13519.8	13413.3	12548.4	11650.1	11171.1	10751.9	10559.0	9474.5	7478.5	3878.9	405.9
42.5°	14304.9	14178.5	13400.0	12521.7	11703.4	11137.8	10951.5	10079.9	8256.9	4604.2	492.4
45°	15176.5	15109.9	14324.8	13659.5	12568.3	11663.5	11417.3	10565.6	8968.8	5469.1	605.5
47.5°	16487.2	16367.4	15635.6	15090.0	13825.8	12461.9	12109.2	11064.6	9654.1	6320.8	778.5
50°	18010.8	17931.0	17498.5	17066.0	15808.5	13825.8	13406.7	11783.2	10419.3	7332.1	1004.7
52.5°	19255.0	19241.7	19294.9	19301.6	18350.1	16121.3	15495.8	12940.9	11297.5	8330.1	1324.0
55°	19228.4	19288.3	19873.8	20545.8	20619.0	19255.0	18649.6	14890.4	12441.9	9561.0	1769.8
57.5°	18509.8	18463.3	19082.0	20093.3	20805.3	20951.6	20851.8	17917.7	14165.1	11044.7	2455.1
58°	18277.0	18237.0	18822.5	19853.8	20672.2	21064.7	20964.9	18603.0	14551.0	11257.6	2641.4
60°	17432.0	17438.6	17784.6	18722.7	19541.1	20472.6	20565.7	20559.1	16473.9	12681.4	3579.5
62.5°	16314.2	16261.0	16580.3	17345.5	18064.1	18689.5	18849.2	20692.2	19288.3	14491.2	5369.3
65°	14770.6	14690.8	15030.1	15895.0	16666.8	17072.7	17079.3	18909.0	20612.3	16434.0	7924.2
67.5°	11903.0	11836.4	12515.1	13626.2	14817.2	15349.5	15589.0	16407.3	19494.5	17751.3	9388.0
70°	7292.2	7431.9	8376.7	10119.9	12155.8	13133.9	13493.1	13746.0	16600.3	17551.7	7851.0
72.5°	3366.6	3200.3	4005.4	5222.9	7545.0	9720.7	10093.2	11084.6	13160.5	15236.3	5855.0
75°	1570.2	1510.3	1696.6	2282.1	3419.9	5249.6	5928.2	8849.1	10093.2	10598.9	4224.9
77.5°	805.1	811.7	964.7	1037.9	1410.5	2428.5	2787.8	5821.7	7398.6	5914.9	2834.4
80°	352.6	365.9	372.6	405.9	572.2	938.1	1057.9	2701.3	5056.6	3014.0	1550.2
82.5°	226.2	232.9	232.9	232.9	272.8	372.6	425.8	1084.5	2521.6	1497.0	479.0
85°	119.8	119.8	133.1	166.3	192.9	226.2	239.5	346.0	831.7	445.8	113.1
87.5°	66.5	73.2	79.8	99.8	126.4	153.0	166.3	239.5	319.4	306.1	26.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1063175

CATALOG NUMBER: GLAN-SA6C-935-U-T3BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	166.3	166.3	166.3	166.3	166.3	166.3	166.3	166.3	166.3	166.3	166.3
2.5°	173.0	166.3	159.7	153.0	146.4	139.7	139.7	139.7	139.7	139.7	139.7
5°	166.3	159.7	153.0	139.7	126.4	119.8	113.1	106.5	106.5	106.5	106.5
7.5°	166.3	159.7	139.7	126.4	113.1	99.8	86.5	86.5	86.5	86.5	86.5
10°	166.3	153.0	133.1	113.1	93.1	79.8	73.2	66.5	66.5	66.5	66.5
12.5°	166.3	146.4	126.4	99.8	79.8	66.5	59.9	53.2	53.2	53.2	53.2
15°	166.3	146.4	119.8	93.1	73.2	53.2	46.6	39.9	39.9	39.9	39.9
17.5°	159.7	139.7	113.1	79.8	59.9	39.9	33.3	26.6	26.6	33.3	33.3
20°	153.0	133.1	99.8	66.5	46.6	33.3	20.0	20.0	20.0	20.0	20.0
22.5°	153.0	133.1	93.1	59.9	39.9	20.0	13.3	13.3	13.3	13.3	20.0
25°	153.0	126.4	79.8	46.6	26.6	13.3	6.7	6.7	6.7	6.7	6.7
27.5°	153.0	126.4	73.2	39.9	20.0	13.3	6.7	0.0	0.0	0.0	0.0
30°	146.4	119.8	66.5	33.3	13.3	6.7	0.0	0.0	0.0	0.0	0.0
32.5°	146.4	113.1	53.2	26.6	13.3	6.7	0.0	0.0	0.0	0.0	0.0
35°	153.0	106.5	46.6	20.0	6.7	0.0	0.0	0.0	0.0	0.0	6.7
37.5°	159.7	99.8	39.9	13.3	6.7	0.0	0.0	0.0	0.0	0.0	0.0
40°	166.3	93.1	39.9	13.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	179.6	93.1	33.3	13.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	192.9	93.1	26.6	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	219.6	99.8	26.6	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	239.5	106.5	20.0	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	266.1	99.8	20.0	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	299.4	99.8	20.0	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	326.0	93.1	20.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	339.3	86.5	13.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	405.9	79.8	13.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	632.1	66.5	13.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	1284.1	59.9	13.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	2395.2	53.2	13.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	2681.3	59.9	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	1690.0	46.6	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	891.6	46.6	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	445.8	46.6	6.7	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	206.3	33.3	6.7	6.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	86.5	20.0	13.3	6.7	6.7	0.0	0.0	0.0	0.0	0.0	0.0
85°	39.9	20.0	13.3	13.3	6.7	6.7	0.0	0.0	0.0	0.0	0.0
87.5°	20.0	20.0	20.0	13.3	13.3	6.7	6.7	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-15

Test Date: 10/11/2024

Luminaire Tested: GSS-SB1A-935-U-5WQ

Data in this report applies to families of products including GSS-SB1A-935-U-5WQ

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-15
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-935-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 90 CRI
 3500K CCT 26 LEDS

Spectral Parameters

CCT (K): 3455
 CIE u' : 0.2356
 CIE v' : 0.5159
 Duv: 0.0028
 CIE x: 0.4109
 CIE y: 0.3999
 CIE z: 0.1892
 Peak Wavelength (nm): 616
 Dominant Wavelength (nm): 579
 Purity: 43.35383
 R_f: 92.3
 R_g: 98.5

CRI (Ra): 92.2
 R1: 92.0
 R2: 94.4
 R3: 95.6
 R4: 93.2
 R5: 91.4
 R6: 92.5
 R7: 94.5
 R8: 84.2
 R9: 59.8
 R10: 85.8
 R11: 93.2
 R12: 78.0
 R13: 92.5
 R14: 97.0
 R15: 88.4



Test Conditions

Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-15

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-15

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 3500K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-15

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (φ/nm)
360	0	NR	490	410	NR	620	997	NR	750	74	NR	880	1	NR
365	0	NR	495	454	NR	625	988	NR	755	64	NR	885	1	NR
370	0	NR	500	493	NR	630	973	NR	760	54	NR	890	1	NR
375	0	NR	505	530	NR	635	946	NR	765	47	NR	895	1	NR
380	0	NR	510	564	NR	640	913	NR	770	40	NR	900	1	NR
385	0	NR	515	599	NR	645	870	NR	775	34	NR	905	1	NR
390	0	NR	520	634	NR	650	826	NR	780	29	NR	910	1	NR
395	0	NR	525	664	NR	655	774	NR	785	25	NR	915	1	NR
400	2	NR	530	695	NR	660	720	NR	790	21	NR	920	1	NR
405	4	NR	535	722	NR	665	664	NR	795	18	NR	925	1	NR
410	9	NR	540	741	NR	670	605	NR	800	16	NR	930	0	NR
415	17	NR	545	762	NR	675	550	NR	805	13	NR	935	0	NR
420	32	NR	550	777	NR	680	497	NR	810	12	NR	940	0	NR
425	61	NR	555	789	NR	685	445	NR	815	10	NR	945	0	NR
430	114	NR	560	800	NR	690	398	NR	820	9	NR	950	0	NR
435	218	NR	565	813	NR	695	352	NR	825	7	NR	955	0	NR
440	427	NR	570	828	NR	700	309	NR	830	6	NR	960	0	NR
445	684	NR	575	846	NR	705	273	NR	835	5	NR	965	0	NR
450	611	NR	580	866	NR	710	237	NR	840	5	NR	970	0	NR
455	461	NR	585	888	NR	715	208	NR	845	4	NR	975	0	NR
460	427	NR	590	913	NR	720	181	NR	850	4	NR	980	0	NR
465	349	NR	595	936	NR	725	157	NR	855	3	NR	985	0	NR
470	298	NR	600	957	NR	730	136	NR	860	3	NR	990	1	NR
475	312	NR	605	976	NR	735	117	NR	865	2	NR	995	0	NR
480	335	NR	610	990	NR	740	100	NR	870	2	NR	1000	0	NR
485	367	NR	615	999	NR	745	86	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-15

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.58

λ (nm)	Power W ^Λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^Λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^Λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^Λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^Λ /nm	Lumens (Φ/nm)
360	0	NR	490	410	NR	620	997	NR	750	74	NR	880	1	NR
365	0	NR	495	454	NR	625	988	NR	755	64	NR	885	1	NR
370	0	NR	500	493	NR	630	973	NR	760	54	NR	890	1	NR
375	0	NR	505	530	NR	635	946	NR	765	47	NR	895	1	NR
380	0	NR	510	564	NR	640	913	NR	770	40	NR	900	1	NR
385	0	NR	515	599	NR	645	870	NR	775	34	NR	905	1	NR
390	0	NR	520	634	NR	650	826	NR	780	29	NR	910	1	NR
395	0	NR	525	664	NR	655	774	NR	785	25	NR	915	1	NR
400	2	NR	530	695	NR	660	720	NR	790	21	NR	920	1	NR
405	4	NR	535	722	NR	665	664	NR	795	18	NR	925	1	NR
410	9	NR	540	741	NR	670	605	NR	800	16	NR	930	0	NR
415	17	NR	545	762	NR	675	550	NR	805	13	NR	935	0	NR
420	32	NR	550	777	NR	680	497	NR	810	12	NR	940	0	NR
425	61	NR	555	789	NR	685	445	NR	815	10	NR	945	0	NR
430	114	NR	560	800	NR	690	398	NR	820	9	NR	950	0	NR
435	218	NR	565	813	NR	695	352	NR	825	7	NR	955	0	NR
440	427	NR	570	828	NR	700	309	NR	830	6	NR	960	0	NR
445	684	NR	575	846	NR	705	273	NR	835	5	NR	965	0	NR
450	611	NR	580	866	NR	710	237	NR	840	5	NR	970	0	NR
455	461	NR	585	888	NR	715	208	NR	845	4	NR	975	0	NR
460	427	NR	590	913	NR	720	181	NR	850	4	NR	980	0	NR
465	349	NR	595	936	NR	725	157	NR	855	3	NR	985	0	NR
470	298	NR	600	957	NR	730	136	NR	860	3	NR	990	1	NR
475	312	NR	605	976	NR	735	117	NR	865	2	NR	995	0	NR
480	335	NR	610	990	NR	740	100	NR	870	2	NR	1000	0	NR
485	367	NR	615	999	NR	745	86	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-15

Melanopic Flux vs. Wavelength


Melanopic Lumens: NR
M/P: 3.14

λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	410	NR	620	997	NR	750	74	NR	880	1	NR
365	0	NR	495	454	NR	625	988	NR	755	64	NR	885	1	NR
370	0	NR	500	493	NR	630	973	NR	760	54	NR	890	1	NR
375	0	NR	505	530	NR	635	946	NR	765	47	NR	895	1	NR
380	0	NR	510	564	NR	640	913	NR	770	40	NR	900	1	NR
385	0	NR	515	599	NR	645	870	NR	775	34	NR	905	1	NR
390	0	NR	520	634	NR	650	826	NR	780	29	NR	910	1	NR
395	0	NR	525	664	NR	655	774	NR	785	25	NR	915	1	NR
400	2	NR	530	695	NR	660	720	NR	790	21	NR	920	1	NR
405	4	NR	535	722	NR	665	664	NR	795	18	NR	925	1	NR
410	9	NR	540	741	NR	670	605	NR	800	16	NR	930	0	NR
415	17	NR	545	762	NR	675	550	NR	805	13	NR	935	0	NR
420	32	NR	550	777	NR	680	497	NR	810	12	NR	940	0	NR
425	61	NR	555	789	NR	685	445	NR	815	10	NR	945	0	NR
430	114	NR	560	800	NR	690	398	NR	820	9	NR	950	0	NR
435	218	NR	565	813	NR	695	352	NR	825	7	NR	955	0	NR
440	427	NR	570	828	NR	700	309	NR	830	6	NR	960	0	NR
445	684	NR	575	846	NR	705	273	NR	835	5	NR	965	0	NR
450	611	NR	580	866	NR	710	237	NR	840	5	NR	970	0	NR
455	461	NR	585	888	NR	715	208	NR	845	4	NR	975	0	NR
460	427	NR	590	913	NR	720	181	NR	850	4	NR	980	0	NR
465	349	NR	595	936	NR	725	157	NR	855	3	NR	985	0	NR
470	298	NR	600	957	NR	730	136	NR	860	3	NR	990	1	NR
475	312	NR	605	976	NR	735	117	NR	865	2	NR	995	0	NR
480	335	NR	610	990	NR	740	100	NR	870	2	NR	1000	0	NR
485	367	NR	615	999	NR	745	86	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-15



TM-30-18

Summary

$R_f = 92.3$
 $R_g = 98.5$
 $\text{CIE } R_a = 92.2$
 $R_9 = 59.8$



Color Vector Graphics

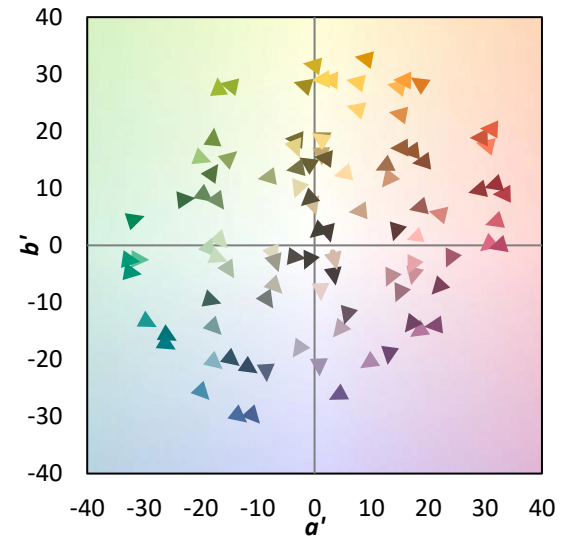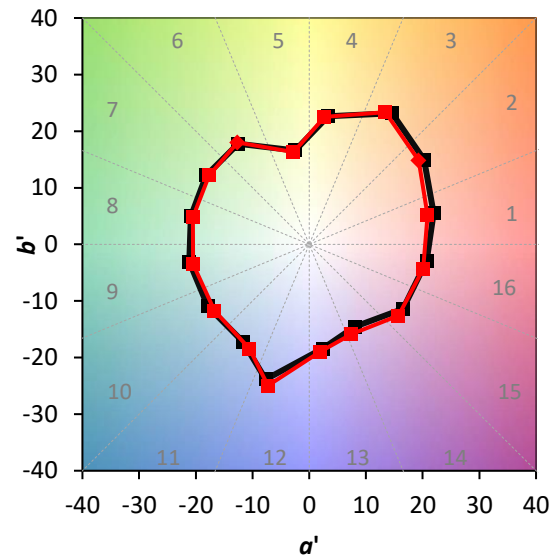

Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 86	CES26 = 93	CES51 = 97	CES76 = 88
CES02 = 62	CES27 = 93	CES52 = 98	CES77 = 91
CES03 = 31	CES28 = 96	CES53 = 96	CES78 = 85
CES04 = 70	CES29 = 95	CES54 = 95	CES79 = 96
CES05 = 50	CES30 = 97	CES55 = 94	CES80 = 94
CES06 = 51	CES31 = 96	CES56 = 94	CES81 = 87
CES07 = 42	CES32 = 91	CES57 = 93	CES82 = 97
CES08 = 41	CES33 = 98	CES58 = 94	CES83 = 97
CES09 = 29	CES34 = 94	CES59 = 96	CES84 = 94
CES10 = 75	CES35 = 97	CES60 = 94	CES85 = 85
CES11 = 58	CES36 = 86	CES61 = 93	CES86 = 87
CES12 = 64	CES37 = 95	CES62 = 91	CES87 = 92
CES13 = 43	CES38 = 92	CES63 = 93	CES88 = 96
CES14 = 74	CES39 = 99	CES64 = 91	CES89 = 87
CES15 = 71	CES40 = 98	CES65 = 89	CES90 = 96
CES16 = 47	CES41 = 98	CES66 = 89	CES91 = 78
CES17 = 49	CES42 = 96	CES67 = 88	CES92 = 81
CES18 = 56	CES43 = 96	CES68 = 89	CES93 = 89
CES19 = 71	CES44 = 99	CES69 = 91	CES94 = 81
CES20 = 66	CES45 = 98	CES70 = 87	CES95 = 85
CES21 = 86	CES46 = 97	CES71 = 84	CES96 = 92
CES22 = 78	CES47 = 97	CES72 = 95	CES97 = 95
CES23 = 91	CES48 = 93	CES73 = 83	CES98 = 94
CES24 = 90	CES49 = 96	CES74 = 94	CES99 = 91
CES25 = 71	CES50 = 98	CES75 = 85	



Color Rendition by Hue-Angle Bin


Measure Comparisons



(END OF REPORT)