

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1063207

Luminaire Tested: **GLAN-SA5C-940-U-T3BC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1063207
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SA5C-940-U-T3BC
Description: GALLEON II AREA AND ROADWAY LUMINAIRE 1050mA 5xLight Square PACKAGE
90CRI 4000K FIXTURE w/ TYPE III ANGLED BACKLIGHT CONTROL
Light Source: (70) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 21228.1 lumens
Efficiency: N/A
Efficacy: 89.9 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type III - Short
BUG Rating: B0 - U0 - G4

Input Watts (W): 236
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1063207

CATALOG NUMBER: GLAN-SA5C-940-U-T3BC

Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd
 - - - 1/2 Max cd

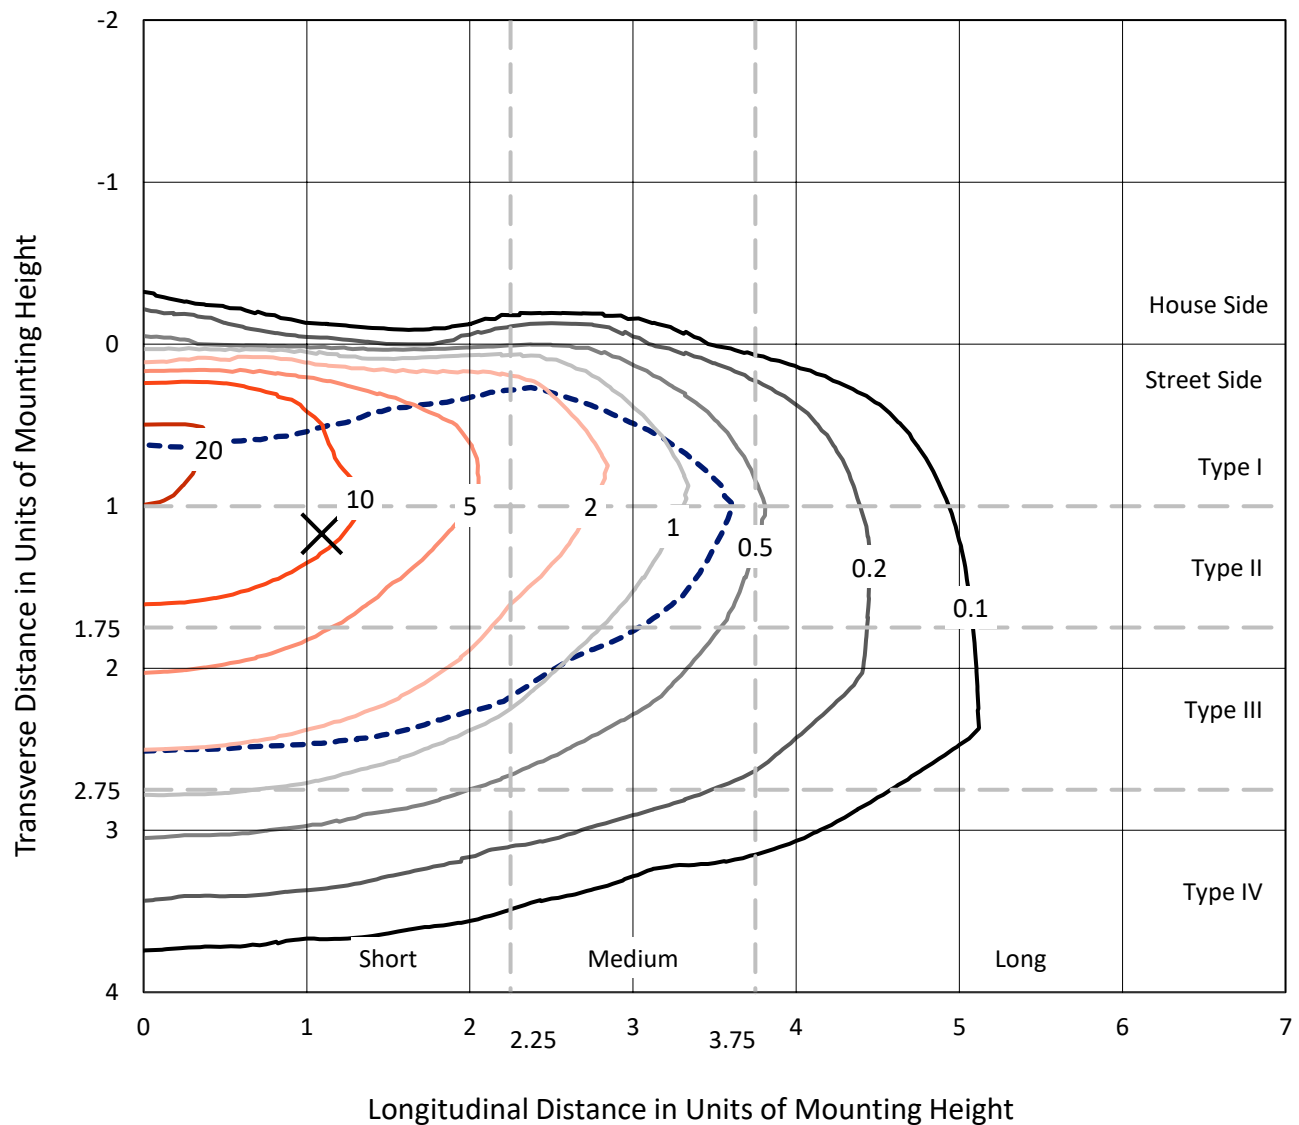


Based on 15 foot mounting height. Maximum calculated value = 23.8 fc
 Type III - Short - N/A

REPORT NUMBER: P1063207

CATALOG NUMBER: GLAN-SA5C-940-U-T3BC

Luminous Intensity Polar Plot

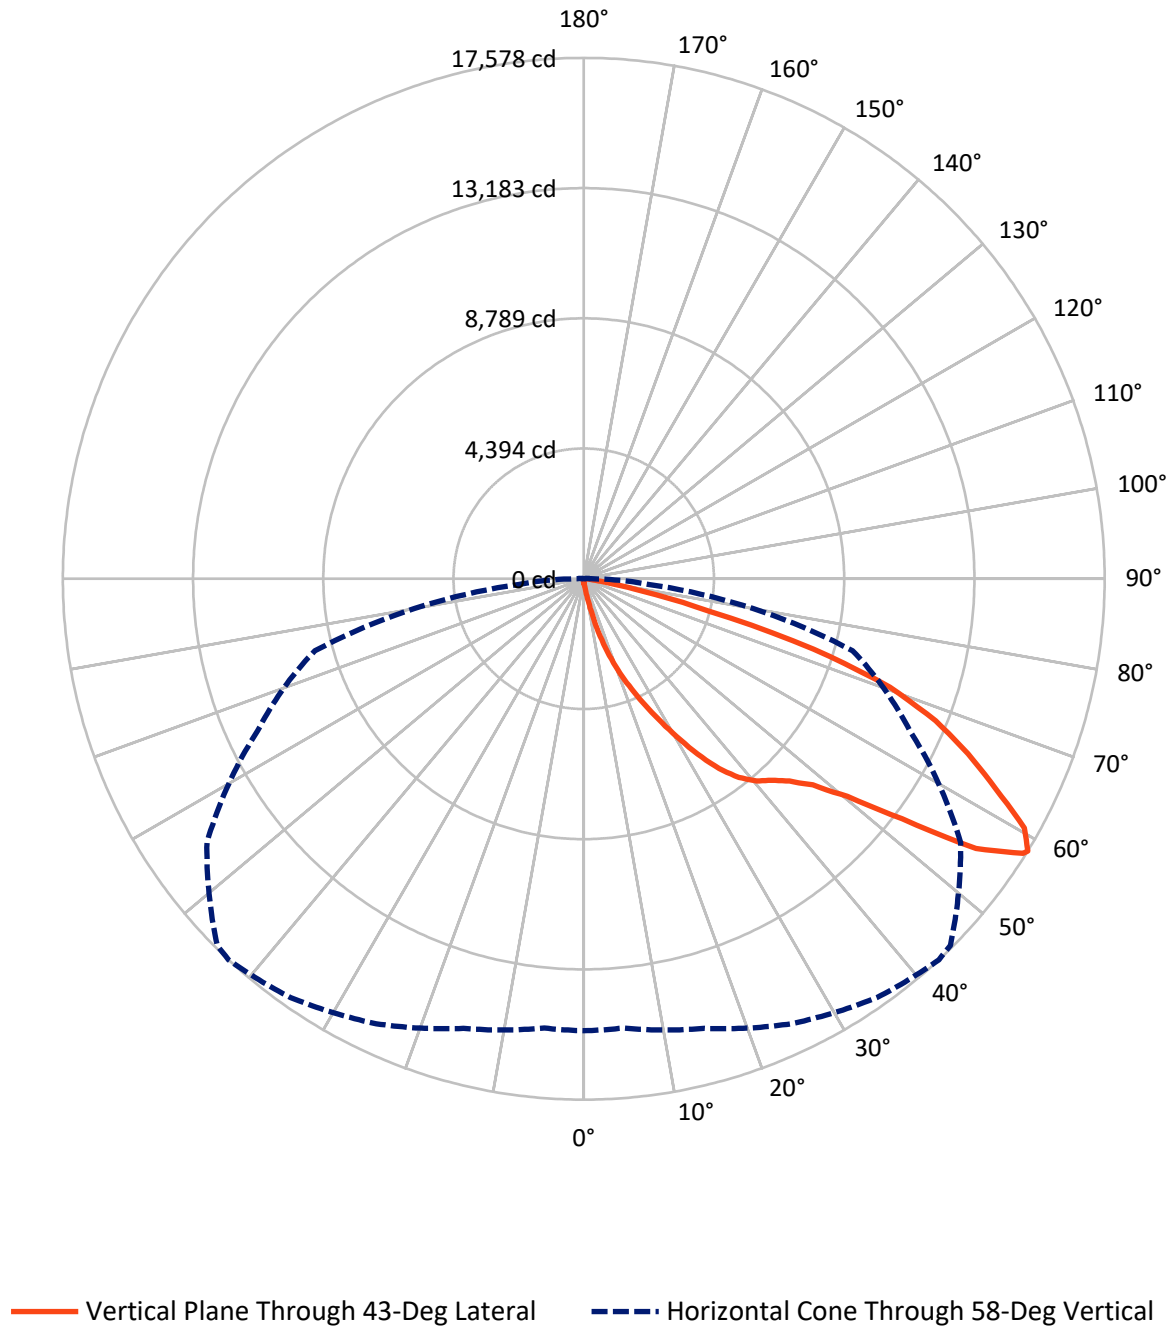

REPORT NUMBER: P1063207

CATALOG NUMBER: GLAN-SA5C-940-U-T3BC

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	77.5	0.0	77.5
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	21150.6	0.0	21150.6
	% Fixture	99.6	0.0	99.6
Total	Lumens	21228.1	0.0	21228.1
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	20.3	0.1
10°-20°	244.0	1.1
20°-30°	879.5	4.1
30°-40°	2012.3	9.5
40°-50°	3394.0	16.0
50°-60°	5600.8	26.4
60°-70°	6259.7	29.5
70°-80°	2584.5	12.2
80°-90°	233.0	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	21228.1	100.0
0°-180°	21228.1	100.0



REPORT NUMBER: P1063207


CATALOG NUMBER: GLAN-SA5C-940-U-T3BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1123.6	5.3			
FM	(30°-60°)	10988.5	51.8			
FH	(60°-80°)	8808.7	41.5			G4/12000
FVH	(80°-90°)	229.8	1.1			G3/500
BL	(0°-30°)	20.2	0.1	B0/110		
BM	(30°-60°)	18.6	0.1	B0/220		
BH	(60°-80°)	35.5	0.2	B0/110		G0/110
BVH	(80°-90°)	3.2	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G4

Type III Short

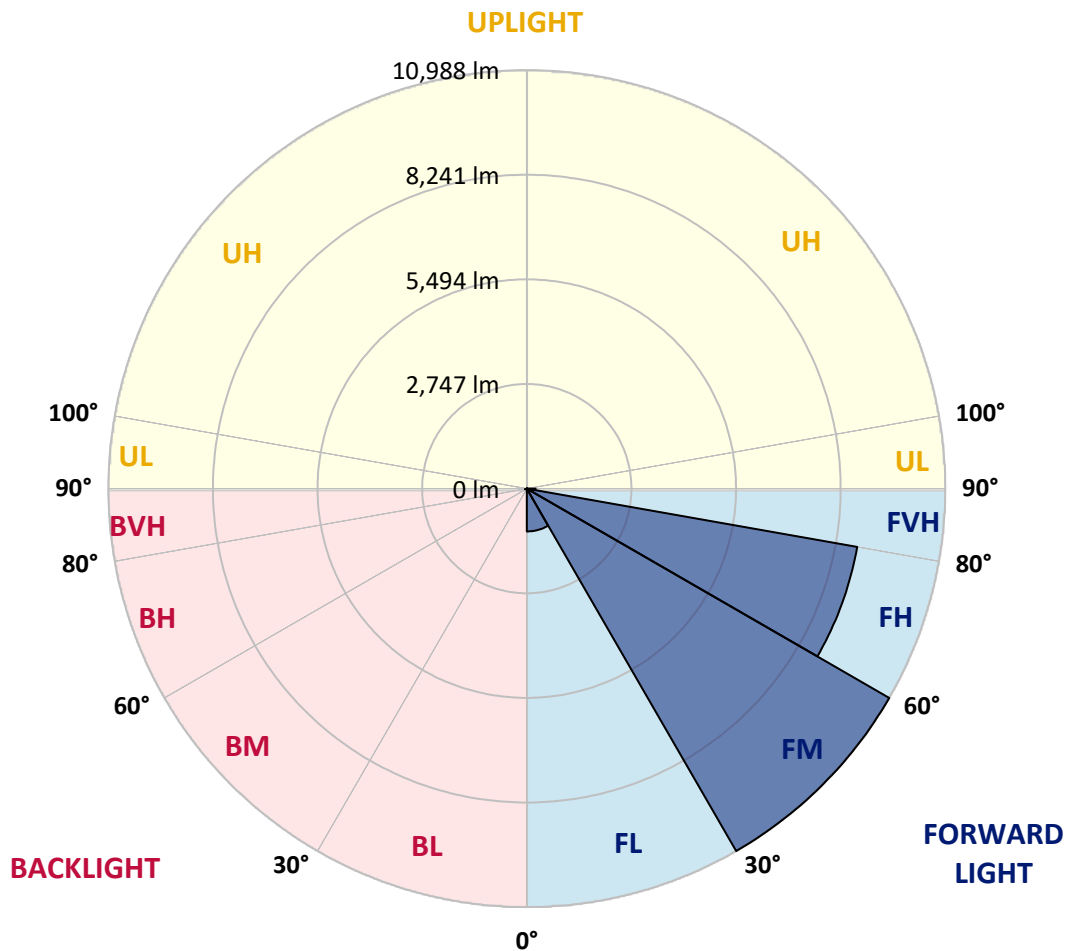

REPORT NUMBER: P1063207

CATALOG NUMBER: GLAN-SA5C-940-U-T3BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	43°	45°	55°	65°	75°	85°
0°	138.8	138.8	138.8	138.8	138.8	138.8	138.8	138.8	138.8	138.8	138.8
2.5°	166.6	172.1	166.6	166.6	166.6	161.0	161.0	155.5	155.5	149.9	144.4
5°	244.3	244.3	227.6	216.5	205.4	199.9	194.3	183.2	172.1	161.0	149.9
7.5°	544.1	544.1	494.1	427.5	338.7	288.7	277.6	227.6	194.3	172.1	149.9
10°	1299.2	1299.2	1188.1	1004.9	777.3	577.4	516.3	327.6	233.2	183.2	155.5
12.5°	2159.7	2187.5	2048.7	1815.5	1476.8	1127.1	1004.9	599.6	310.9	199.9	155.5
15°	2931.5	2864.8	2826.0	2603.9	2281.9	1865.5	1710.0	1010.5	449.7	227.6	155.5
17.5°	3453.4	3453.4	3397.8	3247.9	2953.7	2587.2	2459.5	1632.3	727.3	260.9	161.0
20°	4064.1	4064.1	3964.1	3858.7	3597.7	3286.8	3164.6	2320.7	1127.1	333.1	161.0
22.5°	4802.5	4813.6	4702.6	4513.8	4263.9	3919.7	3814.2	2959.2	1632.3	444.2	166.6
25°	5701.9	5713.0	5552.0	5374.4	4991.3	4619.3	4458.3	3692.1	2248.6	621.8	166.6
27.5°	6695.7	6773.5	6534.7	6229.4	5824.1	5357.7	5235.6	4352.8	2859.3	877.2	177.7
30°	7933.8	7933.8	7617.4	7189.9	6751.3	6173.8	6018.4	5046.8	3508.9	1215.9	188.8
32.5°	8999.8	8916.5	8511.2	8061.5	7595.2	7056.6	6890.1	5774.1	4175.1	1637.8	211.0
35°	9816.0	9743.8	9244.1	8761.1	8355.8	7861.7	7661.8	6562.5	4880.2	2115.3	244.3
37.5°	10515.5	10487.8	9810.4	9205.2	8938.7	8505.7	8328.0	7306.5	5574.2	2631.7	283.2
40°	11281.7	11192.9	10471.1	9721.6	9321.8	8972.1	8811.0	7906.1	6240.5	3236.8	338.7
42.5°	11936.8	11831.3	11181.8	10448.9	9766.0	9294.1	9138.6	8411.3	6890.1	3842.0	410.8
45°	12664.1	12608.6	11953.5	11398.3	10487.8	9732.7	9527.3	8816.6	7484.1	4563.8	505.2
47.5°	13757.9	13658.0	13047.2	12592.0	11537.1	10398.9	10104.7	9233.0	8056.0	5274.4	649.6
50°	15029.3	14962.7	14601.8	14240.9	13191.6	11537.1	11187.3	9832.6	8694.5	6118.3	838.4
52.5°	16067.5	16056.4	16100.8	16106.4	15312.5	13452.5	12930.6	10798.7	9427.3	6951.1	1104.9
55°	16045.3	16095.3	16583.9	17144.6	17205.7	16067.5	15562.3	12425.4	10382.3	7978.2	1476.8
57.5°	15445.7	15406.8	15923.2	16767.1	17361.2	17483.3	17400.0	14951.6	11820.2	9216.3	2048.7
58°	15251.4	15218.1	15706.7	16567.2	17250.1	17577.7	17494.4	15523.4	12142.3	9394.0	2204.2
60°	14546.3	14551.8	14840.5	15623.4	16306.3	17083.6	17161.3	17155.7	13746.8	10582.1	2987.0
62.5°	13613.5	13569.1	13835.6	14474.1	15073.7	15595.6	15728.9	17266.8	16095.3	12092.3	4480.5
65°	12325.5	12258.8	12542.0	13263.8	13907.8	14246.5	14252.0	15778.8	17200.1	13713.5	6612.5
67.5°	9932.6	9877.0	10443.3	11370.5	12364.3	12808.5	13008.4	13691.3	16267.4	14812.8	7833.9
70°	6085.0	6201.6	6990.0	8444.6	10143.5	10959.7	11259.5	11470.5	13852.3	14646.2	6551.4
72.5°	2809.3	2670.5	3342.3	4358.3	6296.0	8111.5	8422.4	9249.7	10981.9	12714.1	4885.8
75°	1310.3	1260.3	1415.8	1904.3	2853.7	4380.5	4946.8	7384.2	8422.4	8844.4	3525.5
77.5°	671.8	677.3	805.0	866.1	1177.0	2026.5	2326.3	4858.0	6173.8	4935.7	2365.2
80°	294.3	305.4	310.9	338.7	477.5	782.8	882.8	2254.1	4219.5	2515.1	1293.6
82.5°	188.8	194.3	194.3	194.3	227.6	310.9	355.3	905.0	2104.2	1249.2	399.7
85°	99.9	99.9	111.0	138.8	161.0	188.8	199.9	288.7	694.0	372.0	94.4
87.5°	55.5	61.1	66.6	83.3	105.5	127.7	138.8	199.9	266.5	255.4	22.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P1063207

CATALOG NUMBER: GLAN-SA5C-940-U-T3BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	138.8	138.8	138.8	138.8	138.8	138.8	138.8	138.8	138.8	138.8	138.8
2.5°	144.4	138.8	133.2	127.7	122.1	116.6	116.6	116.6	116.6	116.6	116.6
5°	138.8	133.2	127.7	116.6	105.5	99.9	94.4	88.8	88.8	88.8	88.8
7.5°	138.8	133.2	116.6	105.5	94.4	83.3	72.2	72.2	72.2	72.2	72.2
10°	138.8	127.7	111.0	94.4	77.7	66.6	61.1	55.5	55.5	55.5	55.5
12.5°	138.8	122.1	105.5	83.3	66.6	55.5	50.0	44.4	44.4	44.4	44.4
15°	138.8	122.1	99.9	77.7	61.1	44.4	38.9	33.3	33.3	33.3	33.3
17.5°	133.2	116.6	94.4	66.6	50.0	33.3	27.8	22.2	22.2	27.8	27.8
20°	127.7	111.0	83.3	55.5	38.9	27.8	16.7	16.7	16.7	16.7	16.7
22.5°	127.7	111.0	77.7	50.0	33.3	16.7	11.1	11.1	11.1	11.1	16.7
25°	127.7	105.5	66.6	38.9	22.2	11.1	5.6	5.6	5.6	5.6	5.6
27.5°	127.7	105.5	61.1	33.3	16.7	11.1	5.6	0.0	0.0	0.0	0.0
30°	122.1	99.9	55.5	27.8	11.1	5.6	0.0	0.0	0.0	0.0	0.0
32.5°	122.1	94.4	44.4	22.2	11.1	5.6	0.0	0.0	0.0	0.0	0.0
35°	127.7	88.8	38.9	16.7	5.6	0.0	0.0	0.0	0.0	0.0	5.6
37.5°	133.2	83.3	33.3	11.1	5.6	0.0	0.0	0.0	0.0	0.0	0.0
40°	138.8	77.7	33.3	11.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
42.5°	149.9	77.7	27.8	11.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	161.0	77.7	22.2	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	183.2	83.3	22.2	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	199.9	88.8	16.7	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	222.1	83.3	16.7	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	249.8	83.3	16.7	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	272.0	77.7	16.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58°	283.2	72.2	11.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	338.7	66.6	11.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	527.4	55.5	11.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	1071.5	50.0	11.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	1998.7	44.4	11.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	2237.5	50.0	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	1410.2	38.9	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	744.0	38.9	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	372.0	38.9	5.6	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	172.1	27.8	5.6	5.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	72.2	16.7	11.1	5.6	5.6	0.0	0.0	0.0	0.0	0.0	0.0
85°	33.3	16.7	11.1	11.1	5.6	5.6	0.0	0.0	0.0	0.0	0.0
87.5°	16.7	16.7	16.7	11.1	11.1	5.6	5.6	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-16

Test Date: 10/11/2024

Luminaire Tested: GSS-SB1A-940-U-5WQ

Data in this report applies to families of products including GSS-SB1A-940-U-5WQ


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-16
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-940-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 90 CRI 4000K CCT 26 LEDS

Spectral Parameters

CCT (K): 3856
 CIE u' : 0.2261
 CIE v' : 0.5084
 Duv: 0.0032
 CIE x: 0.3896
 CIE y: 0.3894
 CIE z: 0.2211
 Peak Wavelength (nm): 614
 Dominant Wavelength (nm): 578
 Purity: 33.77304
 R_f: 91.8
 R_g: 98.4

CRI (Ra): 92.1
 R1: 91.8
 R2: 94.1
 R3: 95.3
 R4: 92.8
 R5: 91.0
 R6: 91.6
 R7: 95.0
 R8: 85.2
 R9: 60.7
 R10: 85.2
 R11: 92.4
 R12: 74.5
 R13: 92.3
 R14: 97.0
 R15: 88.5

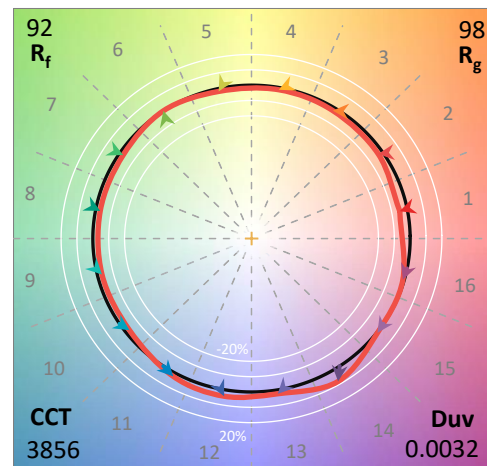

Test Conditions


Stabilization Time: 23M
 Operation Time: 1H 23M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-16


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-16

CIE 1931 Chromaticity Diagram

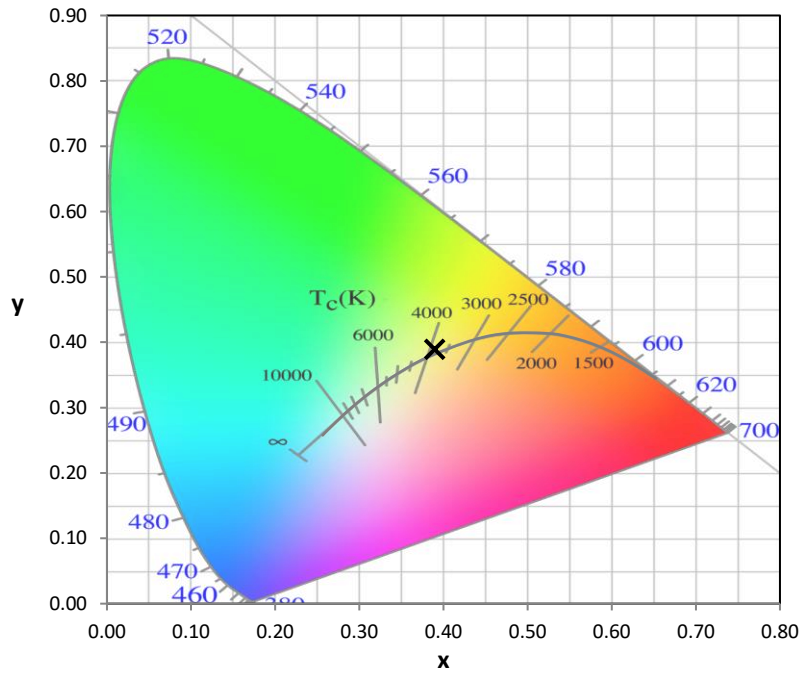


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

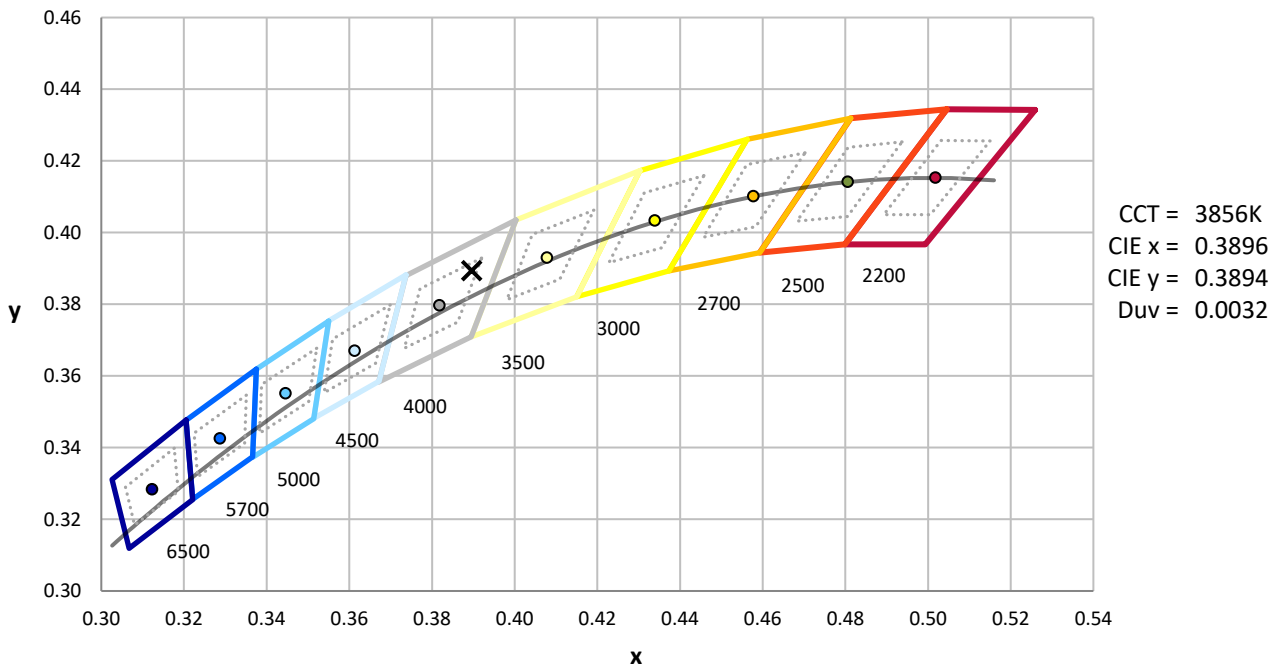

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-16

Photopic Flux vs. Wavelength

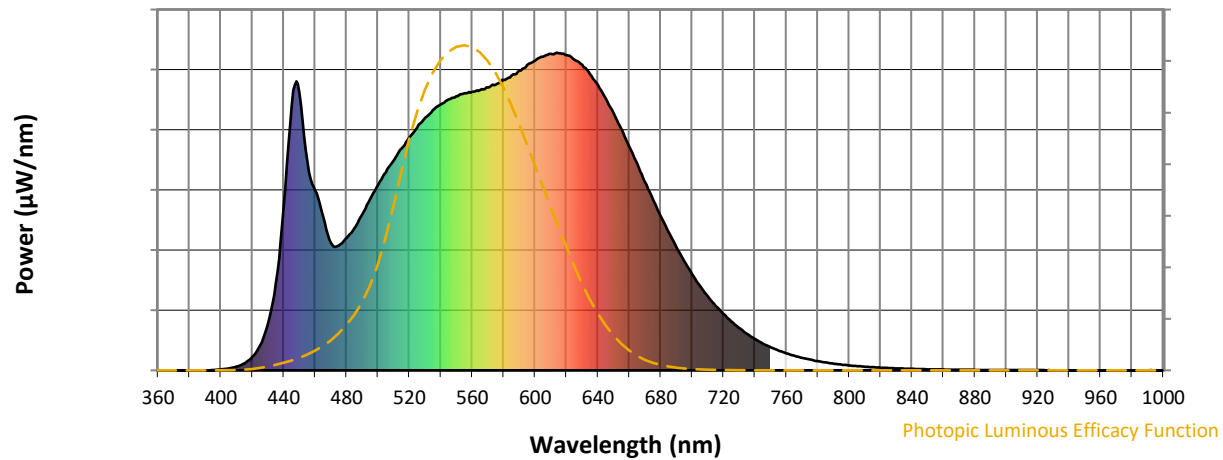


Photopic Lumens: NR

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16

Scotopic Flux vs. Wavelength

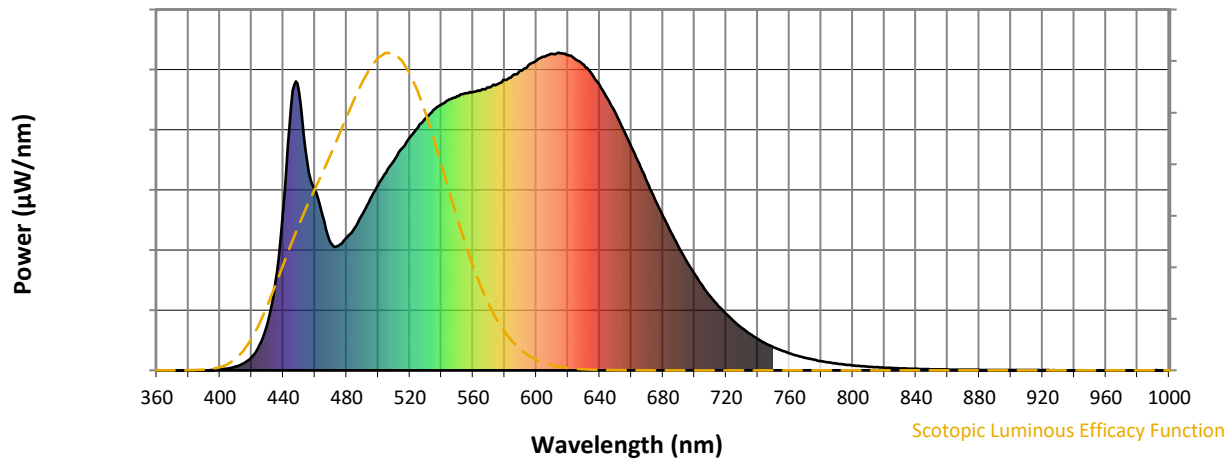


Scotopic Lumens: NR

S/P: 1.72

λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)	λ (nm)	Power W [^] /nm	Lumens (Φ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16

Melanopic Flux vs. Wavelength

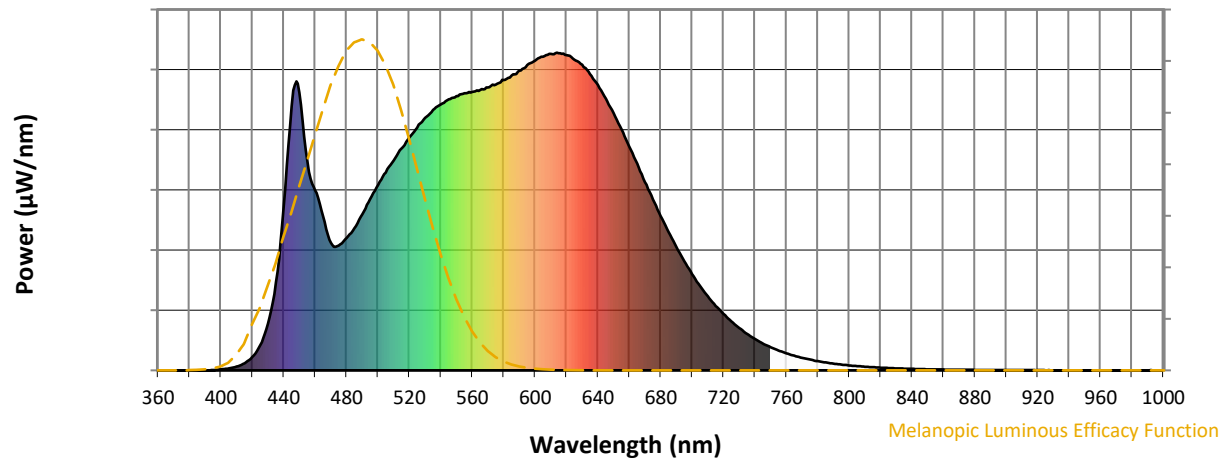

Melanopic Lumens: NR

M/P: 3.52


λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16





TM-30-18

Summary

$R_f = 91.8$
 $R_g = 98.4$
 $CIE R_a = 92.1$
 $R_9 = 60.7$

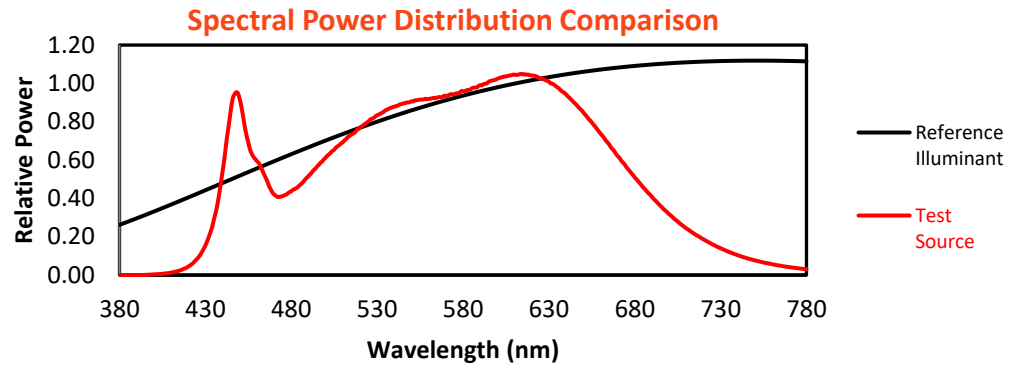


Color Vector Graphics

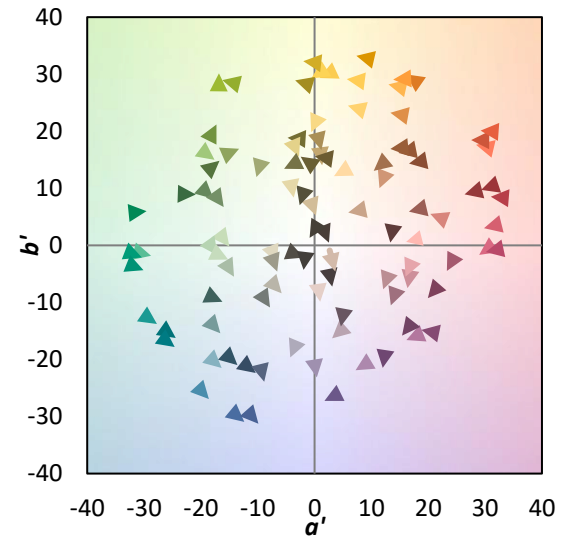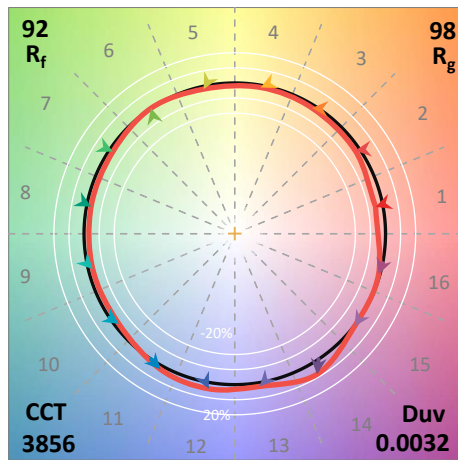
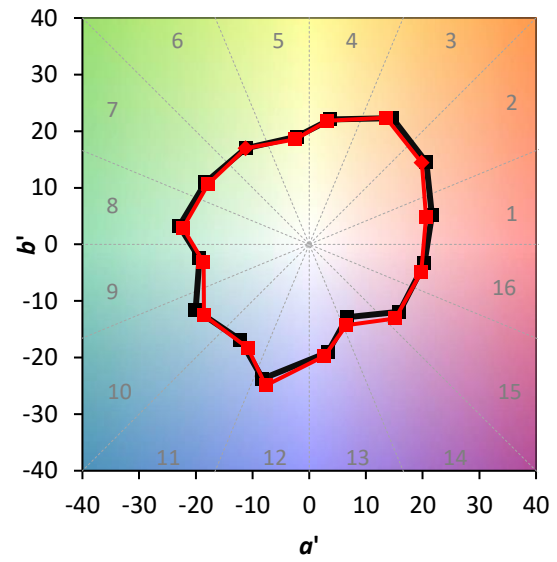
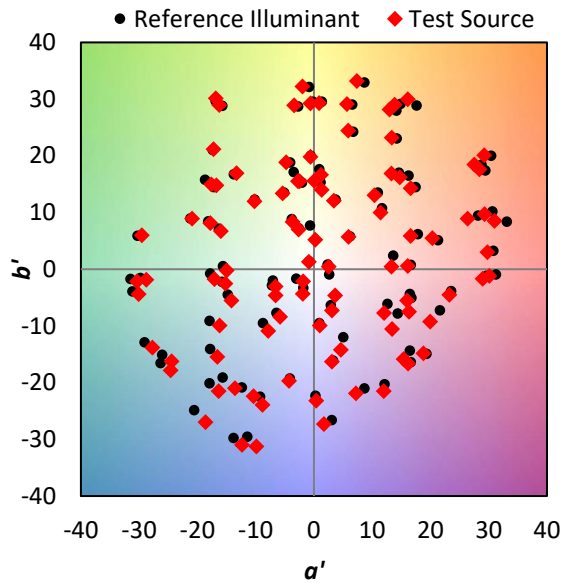


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 86	CES26 = 94	CES51 = 96	CES76 = 87
CES02 = 62	CES27 = 91	CES52 = 98	CES77 = 90
CES03 = 31	CES28 = 96	CES53 = 95	CES78 = 84
CES04 = 69	CES29 = 96	CES54 = 94	CES79 = 96
CES05 = 49	CES30 = 93	CES55 = 92	CES80 = 94
CES06 = 50	CES31 = 97	CES56 = 93	CES81 = 89
CES07 = 42	CES32 = 92	CES57 = 92	CES82 = 97
CES08 = 41	CES33 = 99	CES58 = 92	CES83 = 98
CES09 = 29	CES34 = 94	CES59 = 96	CES84 = 94
CES10 = 74	CES35 = 96	CES60 = 93	CES85 = 85
CES11 = 57	CES36 = 82	CES61 = 92	CES86 = 88
CES12 = 63	CES37 = 95	CES62 = 87	CES87 = 92
CES13 = 43	CES38 = 88	CES63 = 92	CES88 = 96
CES14 = 74	CES39 = 99	CES64 = 89	CES89 = 87
CES15 = 71	CES40 = 98	CES65 = 88	CES90 = 96
CES16 = 47	CES41 = 97	CES66 = 87	CES91 = 74
CES17 = 49	CES42 = 96	CES67 = 86	CES92 = 80
CES18 = 56	CES43 = 96	CES68 = 88	CES93 = 88
CES19 = 71	CES44 = 99	CES69 = 89	CES94 = 82
CES20 = 66	CES45 = 98	CES70 = 86	CES95 = 83
CES21 = 85	CES46 = 97	CES71 = 81	CES96 = 92
CES22 = 78	CES47 = 97	CES72 = 94	CES97 = 95
CES23 = 91	CES48 = 91	CES73 = 81	CES98 = 94
CES24 = 90	CES49 = 96	CES74 = 93	CES99 = 91
CES25 = 71	CES50 = 97	CES75 = 83	

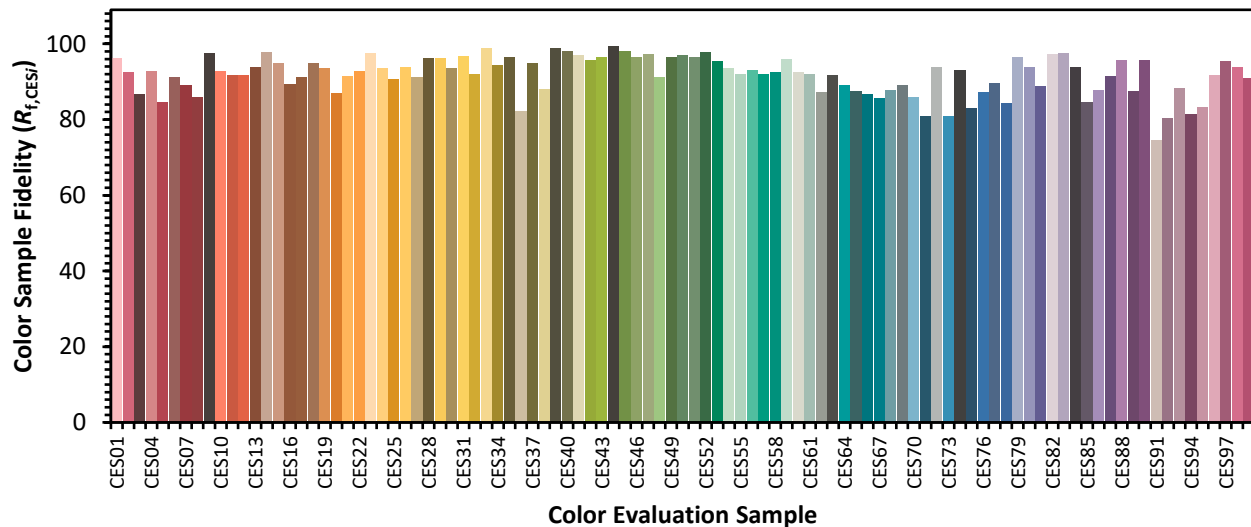

Color Rendition by Hue-Angle Bin

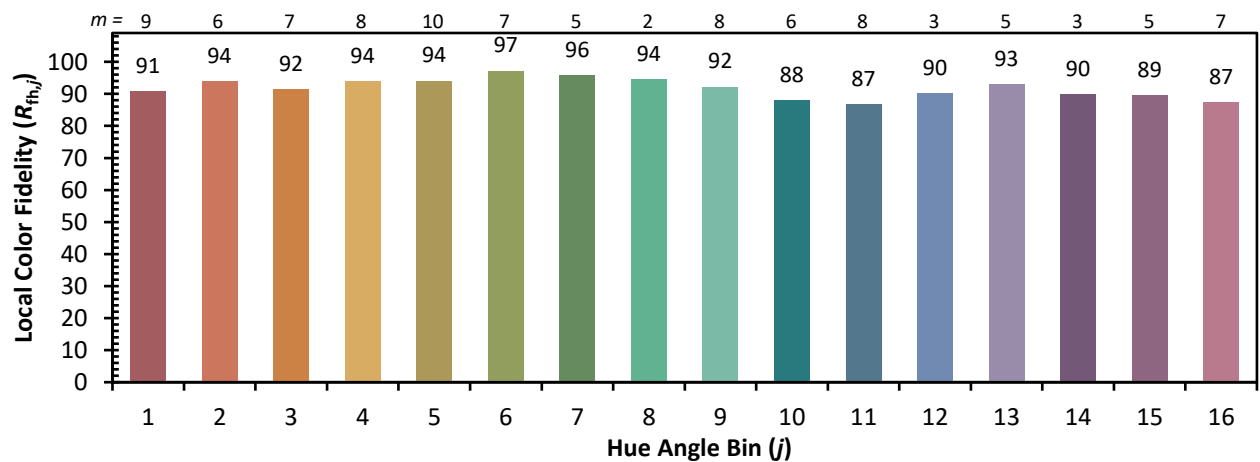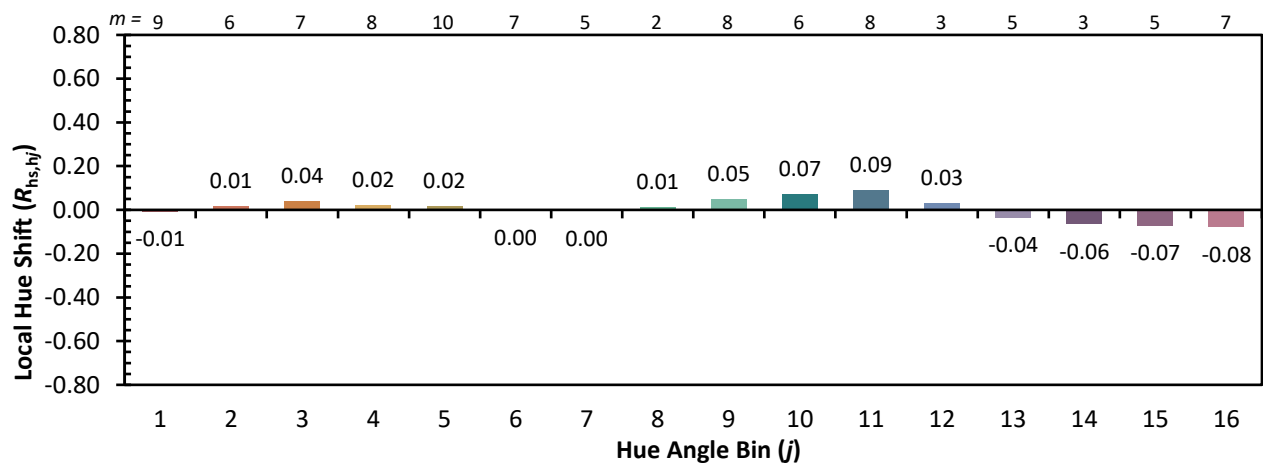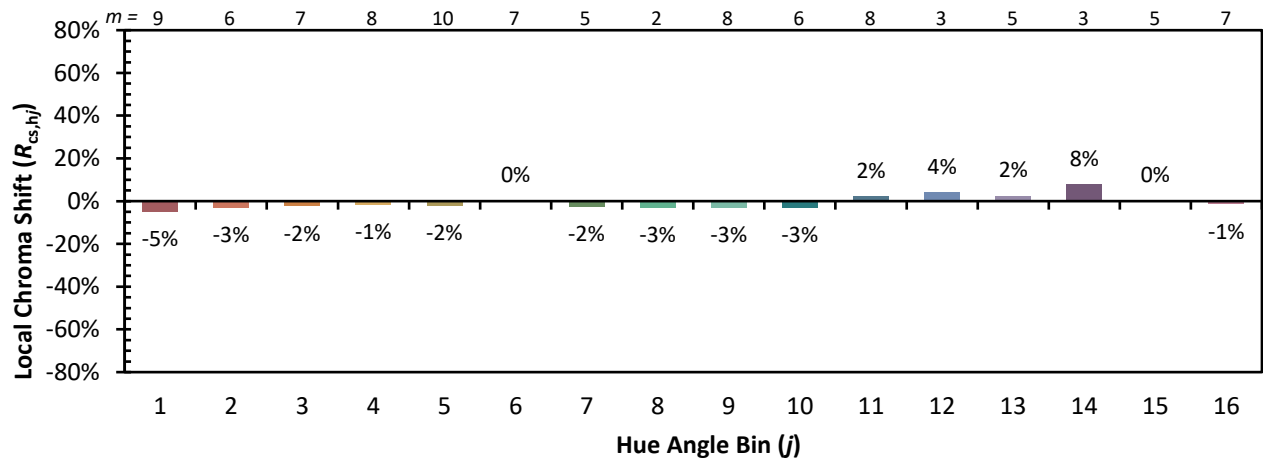

Measure Comparisons

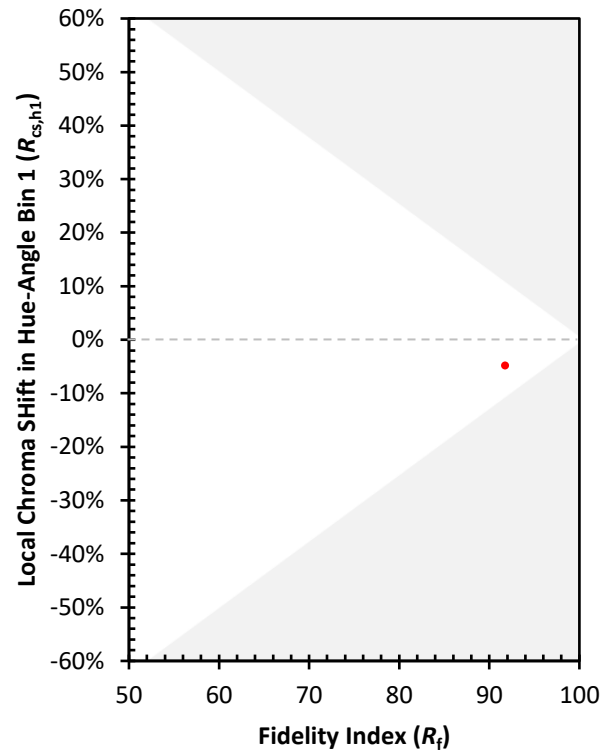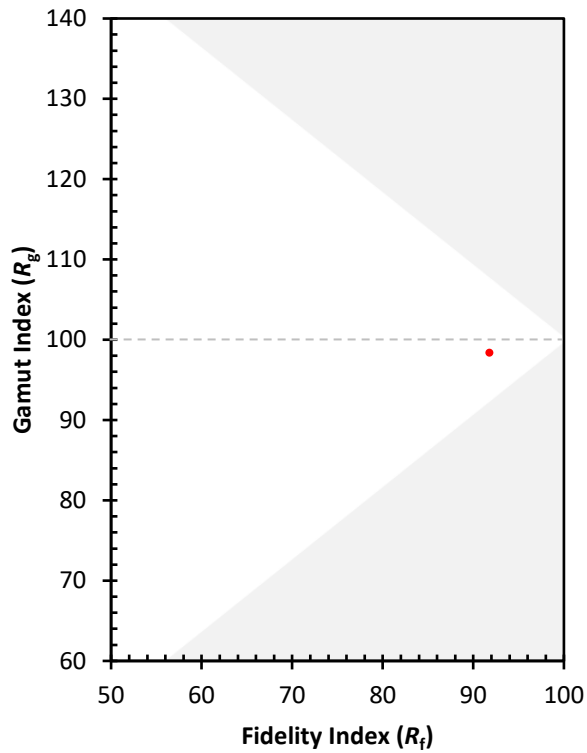

(END OF REPORT)