

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P1063835

Luminaire Tested: **GLAN-SA9C-940-U-T2BC**

Issue Date: 08/07/2025

Test Information

Test Method: LM-79-08
Report Number: P1063835
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/07/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SA9C-940-U-T2BC
Description: GALLEON II AREA AND ROADWAY LUMINAIRE 1050mA 9xLight Square PACKAGE
90CRI 4000K FIXTURE w/ TYPE II ANGLED BACKLIGHT CONTROL
Light Source: (126) 4000K CCT, 90 CRI LEDs
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 35986.4 lumens
Efficiency: N/A
Efficacy: 86.3 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B0 - U0 - G5

Input Watts (W): 417.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.97
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P1063835

CATALOG NUMBER: GLAN-SA9C-940-U-T2BC

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 - - - 1/2 Max cd

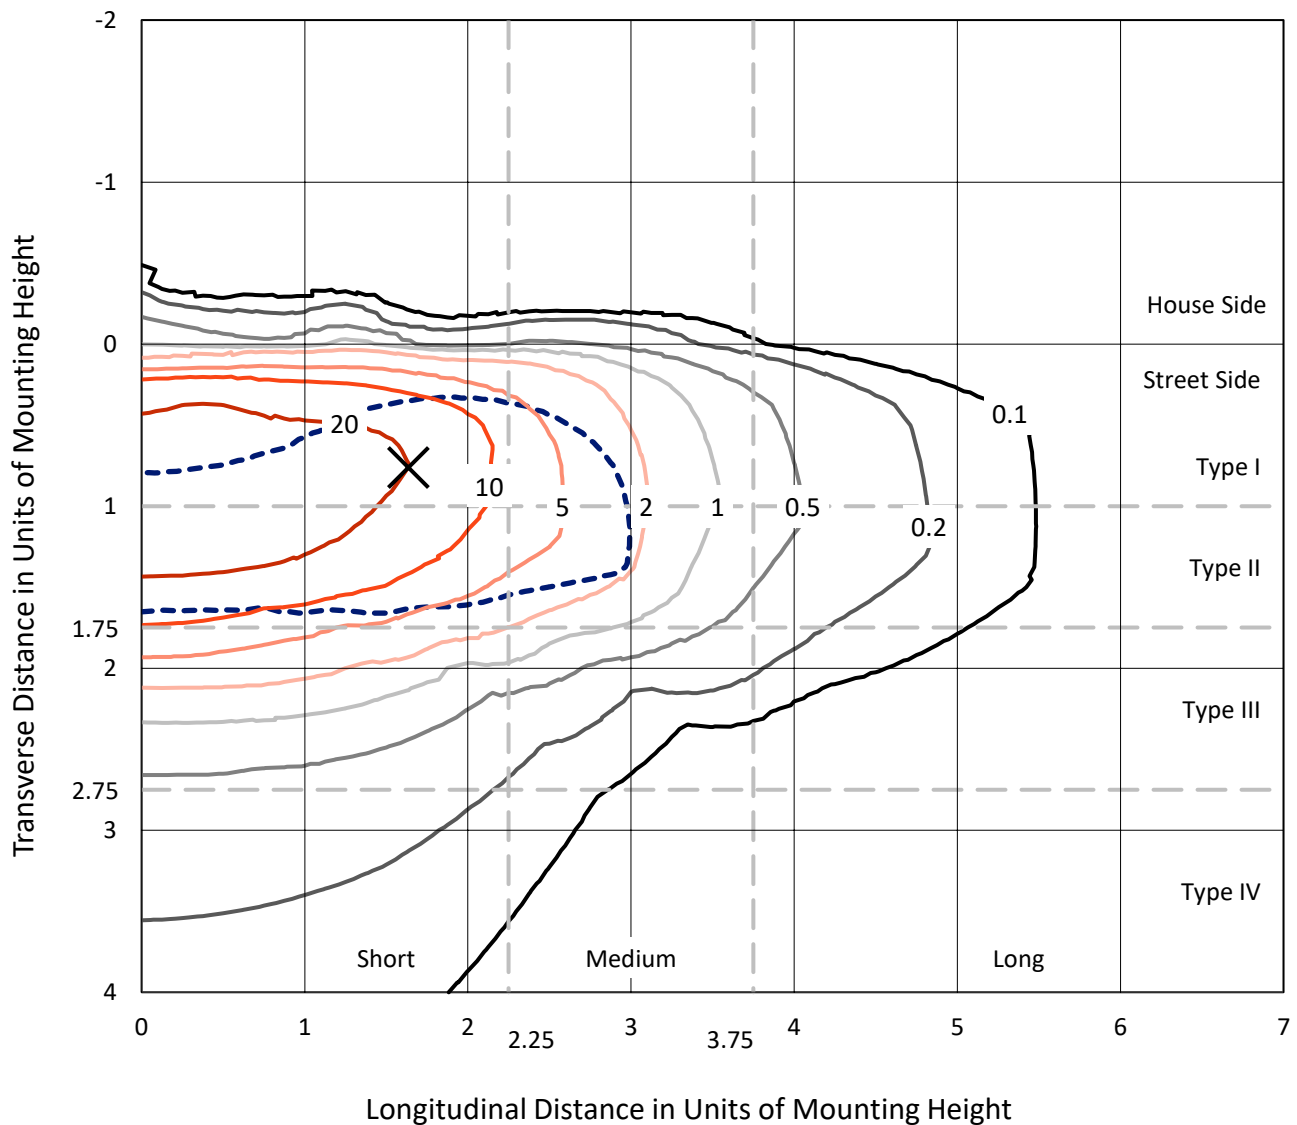


Based on 15 foot mounting height. Maximum calculated value = 47.6 fc
 Type II - Short - N/A

REPORT NUMBER: P1063835

CATALOG NUMBER: GLAN-SA9C-940-U-T2BC

Luminous Intensity Polar Plot

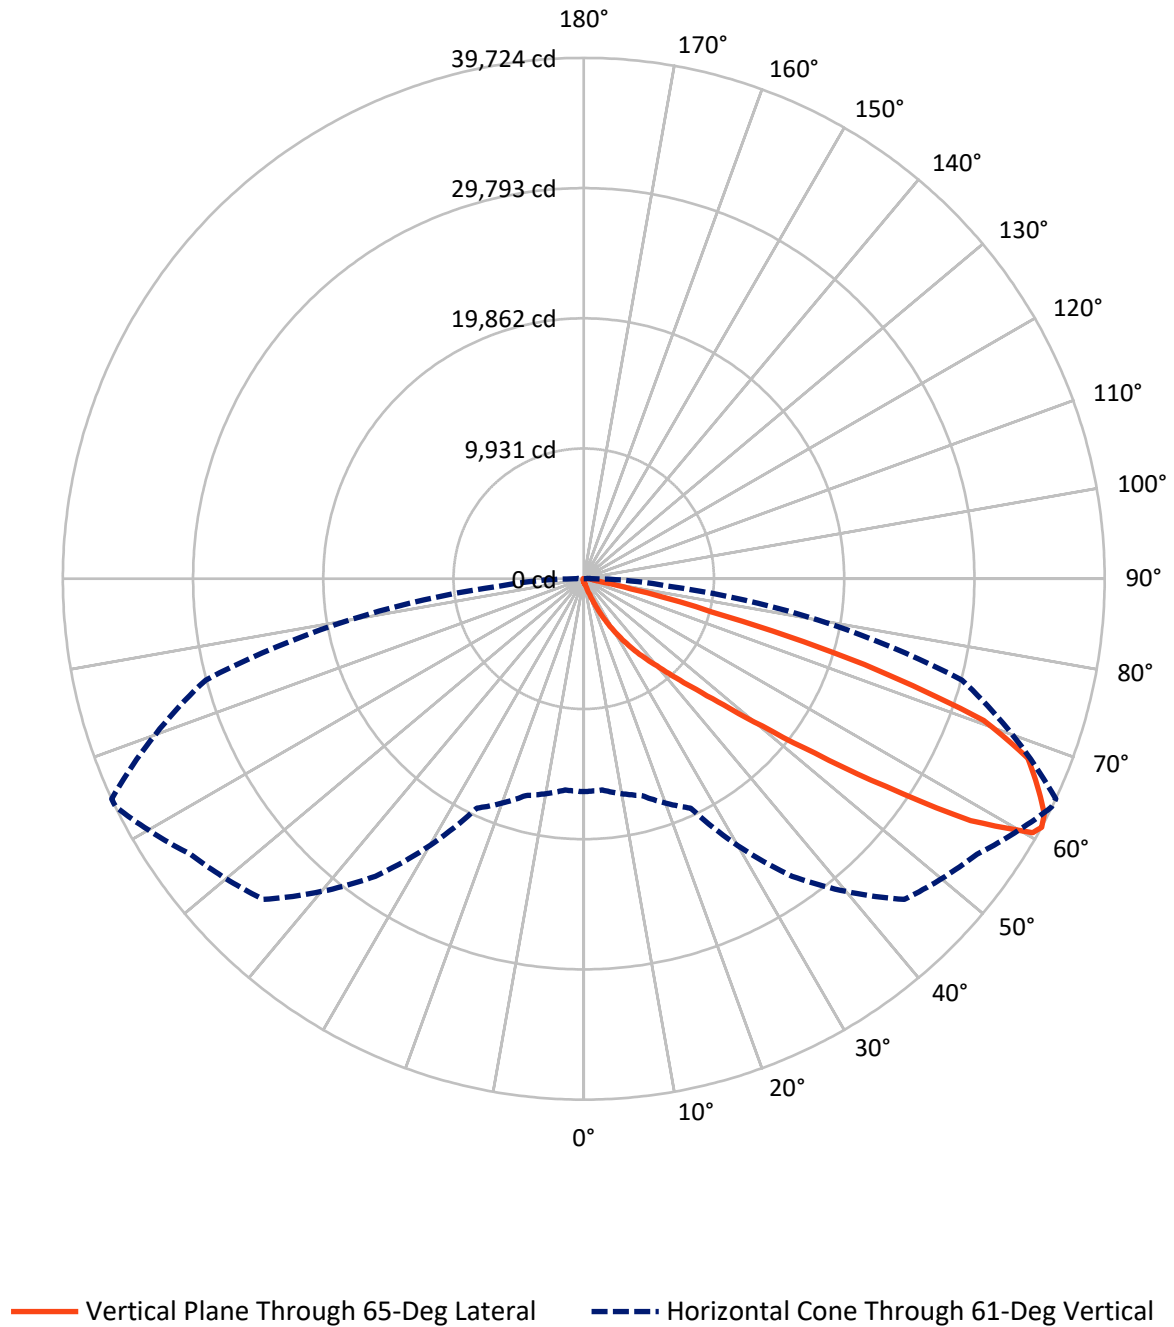

REPORT NUMBER: P1063835

CATALOG NUMBER: GLAN-SA9C-940-U-T2BC


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	153.6	0.0	153.6
	% Fixture	0.4	0.0	0.4
Street Side	Lumens	35832.8	0.0	35832.8
	% Fixture	99.6	0.0	99.6
Total	Lumens	35986.4	0.0	35986.4
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.0	0.1
10°-20°	295.9	0.8
20°-30°	1062.0	3.0
30°-40°	2827.5	7.9
40°-50°	7427.8	20.6
50°-60°	11507.1	32.0
60°-70°	9648.5	26.8
70°-80°	2839.4	7.9
80°-90°	350.3	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	35986.4	100.0
0°-180°	35986.4	100.0

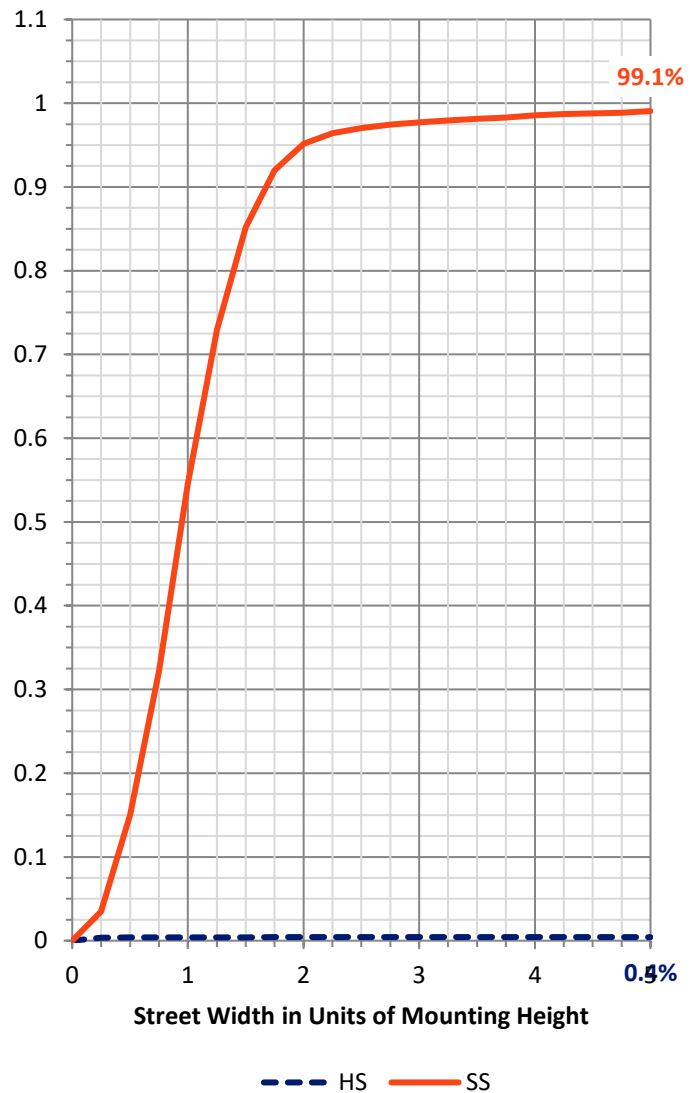

REPORT NUMBER: P1063835


CATALOG NUMBER: GLAN-SA9C-940-U-T2BC

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1351.5	3.8			
FM	(30°-60°)	21703.9	60.3			
FH	(60°-80°)	12433.7	34.6			G5
FVH	(80°-90°)	343.8	1.0			G3/500
BL	(0°-30°)	34.5	0.1	B0/110		
BM	(30°-60°)	58.5	0.2	B0/220		
BH	(60°-80°)	54.2	0.2	B0/110		G0/110
BVH	(80°-90°)	6.5	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G5

Type II Short

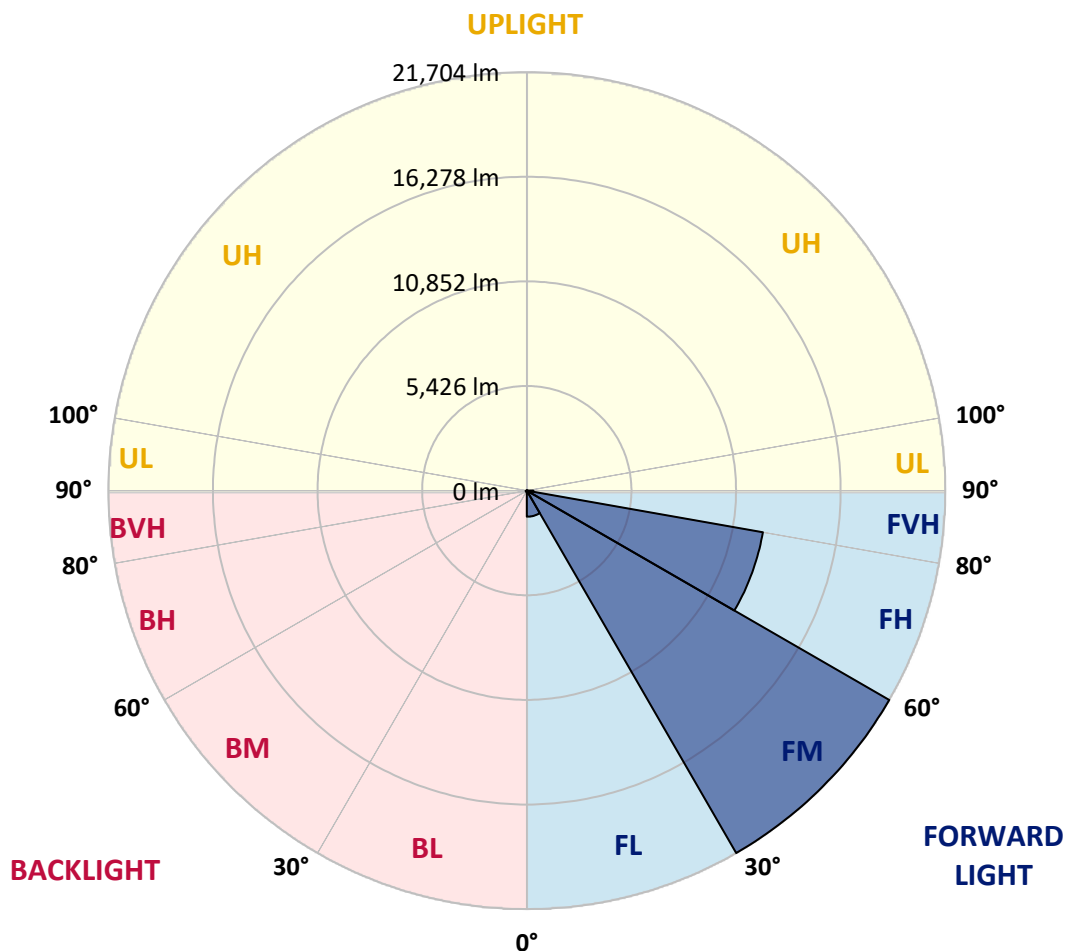



REPORT NUMBER: P1063835

CATALOG NUMBER: GLAN-SA9C-940-U-T2BC

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	64°	65°	75°	85°
0°	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3
2.5°	267.4	269.8	264.9	255.0	247.5	247.5	245.1	237.6	237.6	230.2	225.3
5°	373.8	368.8	358.9	339.1	321.8	304.5	287.2	269.8	267.4	245.1	230.2
7.5°	611.4	616.4	584.2	522.3	470.3	403.5	341.6	304.5	299.5	262.4	232.7
10°	1341.7	1304.6	1230.3	990.2	814.4	613.9	455.5	354.0	349.0	282.2	237.6
12.5°	2445.8	2416.1	2279.9	2032.4	1579.4	1099.1	665.9	438.2	423.3	299.5	240.1
15°	3525.1	3478.0	3403.8	3153.8	2624.0	1970.5	1089.2	599.1	559.5	324.3	237.6
17.5°	4213.3	4220.7	4153.9	4047.4	3705.8	2916.1	1881.4	893.6	816.9	368.8	232.7
20°	4814.8	4797.5	4834.6	4777.7	4537.6	3963.2	2737.9	1416.0	1284.8	440.6	235.2
22.5°	5507.9	5550.0	5577.3	5564.9	5300.0	4809.9	3710.7	2119.0	1953.2	571.8	242.6
25°	6436.2	6431.3	6433.8	6401.6	6144.1	5599.5	4686.1	2992.9	2824.5	784.7	259.9
27.5°	7409.1	7438.8	7451.2	7334.8	6998.2	6463.5	5589.6	3948.4	3750.4	1126.3	282.2
30°	8738.4	8713.7	8656.8	8419.1	8010.7	7347.2	6480.8	4951.0	4743.0	1604.1	316.9
32.5°	10530.7	10503.5	10216.3	9691.5	9080.1	8268.1	7376.9	5956.0	5703.5	2200.7	363.9
35°	13483.9	13526.0	12820.5	11461.5	10364.8	9374.6	8369.6	6956.1	6733.3	2935.9	428.3
37.5°	18006.6	17776.4	16818.4	14417.2	12055.6	10756.0	9317.7	7966.1	7773.0	3841.9	512.4
40°	22400.6	22172.9	21895.6	19620.6	14994.0	12278.4	10644.6	9151.8	8901.8	4864.3	636.2
42.5°	27019.9	26893.6	26881.2	25165.7	20355.9	14672.2	12241.2	10540.6	10327.7	5985.7	839.2
45°	30292.4	30166.2	30431.1	30730.6	27658.5	19801.4	15021.2	12345.2	12035.8	7347.2	1163.5
47.5°	30733.1	30738.0	31446.0	32384.2	33084.8	27735.3	18724.5	14736.5	14360.3	9295.4	1708.1
50°	29267.6	29324.5	30450.9	32129.2	34015.6	34391.8	25254.8	18207.2	17650.2	11605.0	2480.4
52.5°	26477.7	26542.1	28111.5	30871.7	33159.0	35991.0	32943.7	22747.2	22106.0	14486.5	3569.6
55°	23965.1	24004.7	25804.4	29292.3	32126.8	35122.1	37508.5	28809.6	27968.0	18031.4	4644.0
57.5°	21477.3	21385.7	22556.6	26549.5	31951.0	34055.2	38181.8	35718.7	34790.4	21905.5	5480.7
60°	18150.2	17996.7	18937.4	21477.3	29638.9	34755.7	36921.8	39540.8	39330.4	27299.6	6126.8
61°	16236.7	16172.3	17117.9	19296.4	27693.2	34577.5	36619.8	39701.7	39724.0	29851.8	6416.4
62.5°	11595.1	11778.3	13224.0	16056.0	23195.2	33421.4	36659.4	39204.2	39424.5	33243.2	7166.5
65°	5153.9	5448.5	6572.4	8877.1	13488.9	27802.1	36307.9	38112.5	38003.6	34174.0	9750.9
67.5°	3057.2	3101.8	3661.2	5030.2	7144.2	14954.4	32040.1	36669.3	36523.2	29750.3	12132.3
70°	2408.6	2430.9	2609.2	3156.2	4146.4	5728.3	18286.4	31725.7	32361.9	24123.5	11877.4
72.5°	2284.9	2279.9	2304.7	2401.2	2611.6	2841.9	7079.9	21088.6	22383.3	17372.9	9958.9
75°	2255.2	2245.3	2220.5	2183.4	1891.3	1673.4	2193.3	9327.6	10077.7	11869.9	7498.2
77.5°	2188.3	2190.8	2195.8	2094.3	1621.4	1183.3	1062.0	2992.9	3681.0	7532.9	5329.7
80°	1480.3	1502.6	1539.7	1500.1	1458.1	856.5	750.1	1064.5	1079.3	4228.1	3520.1
82.5°	750.1	750.1	732.7	653.5	564.4	557.0	596.6	772.3	782.3	2138.8	1656.1
85°	453.0	477.8	487.7	443.1	406.0	373.8	455.5	613.9	636.2	829.3	386.2
87.5°	101.5	104.0	113.9	151.0	220.3	299.5	423.3	561.9	571.8	532.2	47.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P1063835

CATALOG NUMBER: GLAN-SA9C-940-U-T2BC

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3
2.5°	222.8	217.8	215.4	207.9	200.5	193.1	188.1	185.7	188.1	190.6	190.6
5°	220.3	212.9	200.5	188.1	178.2	168.3	158.4	156.0	156.0	158.4	158.4
7.5°	220.3	207.9	190.6	175.8	160.9	146.1	138.6	133.7	136.2	136.2	136.2
10°	220.3	205.5	183.2	160.9	143.6	126.2	113.9	108.9	108.9	108.9	108.9
12.5°	217.8	203.0	175.8	148.5	123.8	104.0	89.1	81.7	84.2	84.2	84.2
15°	212.9	195.6	165.9	126.2	99.0	79.2	64.4	56.9	59.4	64.4	66.8
17.5°	205.5	188.1	148.5	106.4	79.2	59.4	44.6	39.6	42.1	49.5	49.5
20°	203.0	180.7	131.2	86.6	59.4	42.1	29.7	24.8	27.2	37.1	39.6
22.5°	203.0	175.8	118.8	71.8	44.6	27.2	17.3	9.9	9.9	17.3	17.3
25°	205.5	173.3	108.9	59.4	32.2	19.8	9.9	5.0	9.9	27.2	32.2
27.5°	210.4	170.8	104.0	49.5	24.8	17.3	7.4	17.3	29.7	29.7	29.7
30°	215.4	165.9	96.5	42.1	22.3	12.4	12.4	24.8	24.8	29.7	32.2
32.5°	222.8	163.4	91.6	37.1	17.3	9.9	17.3	14.9	14.9	17.3	19.8
35°	237.6	165.9	86.6	37.1	17.3	12.4	14.9	7.4	5.0	5.0	5.0
37.5°	257.4	168.3	79.2	32.2	14.9	14.9	7.4	0.0	0.0	0.0	0.0
40°	289.6	175.8	74.3	29.7	12.4	12.4	2.5	0.0	0.0	0.0	0.0
42.5°	344.1	190.6	71.8	27.2	12.4	9.9	0.0	0.0	0.0	0.0	0.0
45°	453.0	225.3	66.8	24.8	12.4	5.0	0.0	0.0	0.0	0.0	0.0
47.5°	651.1	307.0	64.4	19.8	7.4	0.0	0.0	0.0	0.0	0.0	0.0
50°	950.6	415.9	61.9	17.3	2.5	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	1213.0	438.2	42.1	14.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	1242.7	302.0	32.2	9.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
57.5°	990.2	195.6	27.2	7.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	750.1	148.5	24.8	2.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
61°	720.4	133.7	24.8	2.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
62.5°	794.6	116.3	22.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	1292.2	96.5	19.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
67.5°	2245.3	84.2	17.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	2836.9	79.2	14.9	2.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	2473.0	71.8	14.9	5.0	2.5	0.0	0.0	0.0	0.0	0.0	0.0
75°	1487.8	61.9	14.9	9.9	5.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	779.8	47.0	14.9	12.4	7.4	2.5	0.0	0.0	0.0	0.0	0.0
80°	378.7	42.1	17.3	12.4	9.9	5.0	0.0	0.0	0.0	0.0	0.0
82.5°	148.5	34.7	19.8	17.3	12.4	7.4	2.5	0.0	0.0	0.0	0.0
85°	66.8	29.7	22.3	19.8	17.3	9.9	2.5	0.0	0.0	0.0	0.0
87.5°	34.7	27.2	24.8	22.3	17.3	12.4	5.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGraw-Edison

Report Number: SP1-2407-184-16

Test Date: 10/11/2024

Luminaire Tested: GSS-SB1A-940-U-5WQ

Data in this report applies to families of products including GSS-SB1A-940-U-5WQ


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-184-16
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGraw-Edison
 Catalog Number: **GSS-SB1A-940-U-5WQ**
 Description: GALLEON II SITE SLIM 1SQ 350MA 5WQ HIGH DENSITY LIGHTSQUARE WITH 90 CRI 4000K CCT 26 LEDS

Spectral Parameters

CCT (K): 3856
 CIE u' : 0.2261
 CIE v' : 0.5084
 Duv: 0.0032
 CIE x: 0.3896
 CIE y: 0.3894
 CIE z: 0.2211
 Peak Wavelength (nm): 614
 Dominant Wavelength (nm): 578
 Purity: 33.77304
 R_f: 91.8
 R_g: 98.4

CRI (Ra): 92.1
 R1: 91.8
 R2: 94.1
 R3: 95.3
 R4: 92.8
 R5: 91.0
 R6: 91.6
 R7: 95.0
 R8: 85.2
 R9: 60.7
 R10: 85.2
 R11: 92.4
 R12: 74.5
 R13: 92.3
 R14: 97.0
 R15: 88.5

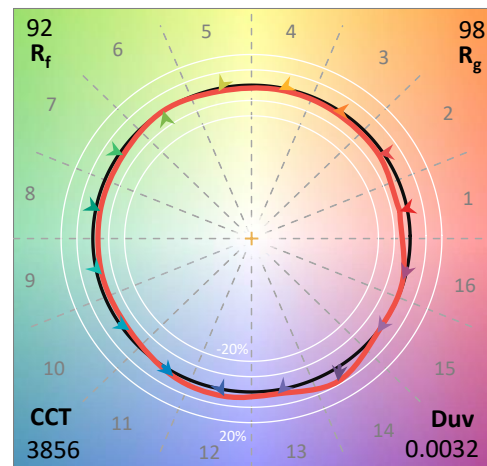

Test Conditions


Stabilization Time: 23M
 Operation Time: 1H 23M
 Sphere Temperature (°C): 25.2

REPORT NUMBER: SP1-2407-184-16


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-184-16

CIE 1931 Chromaticity Diagram

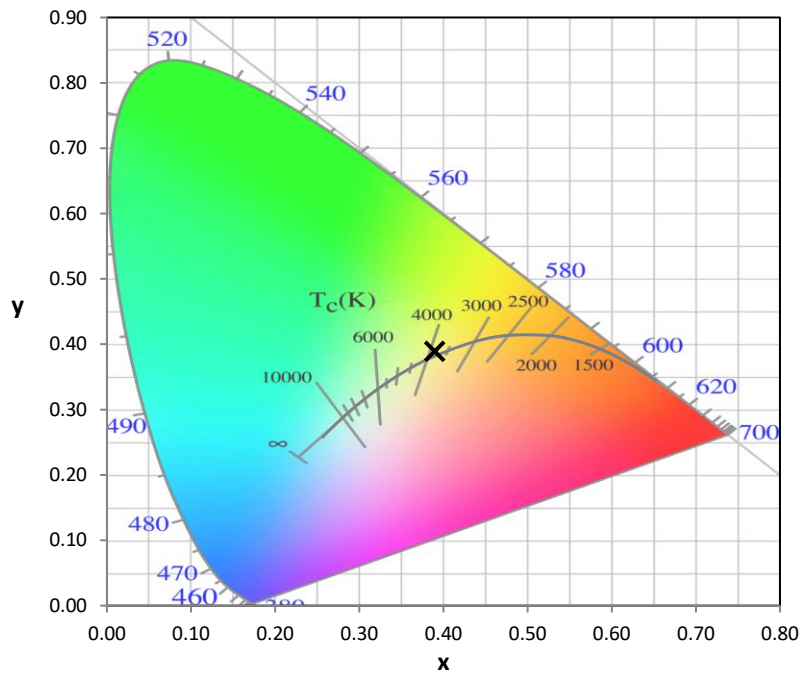


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

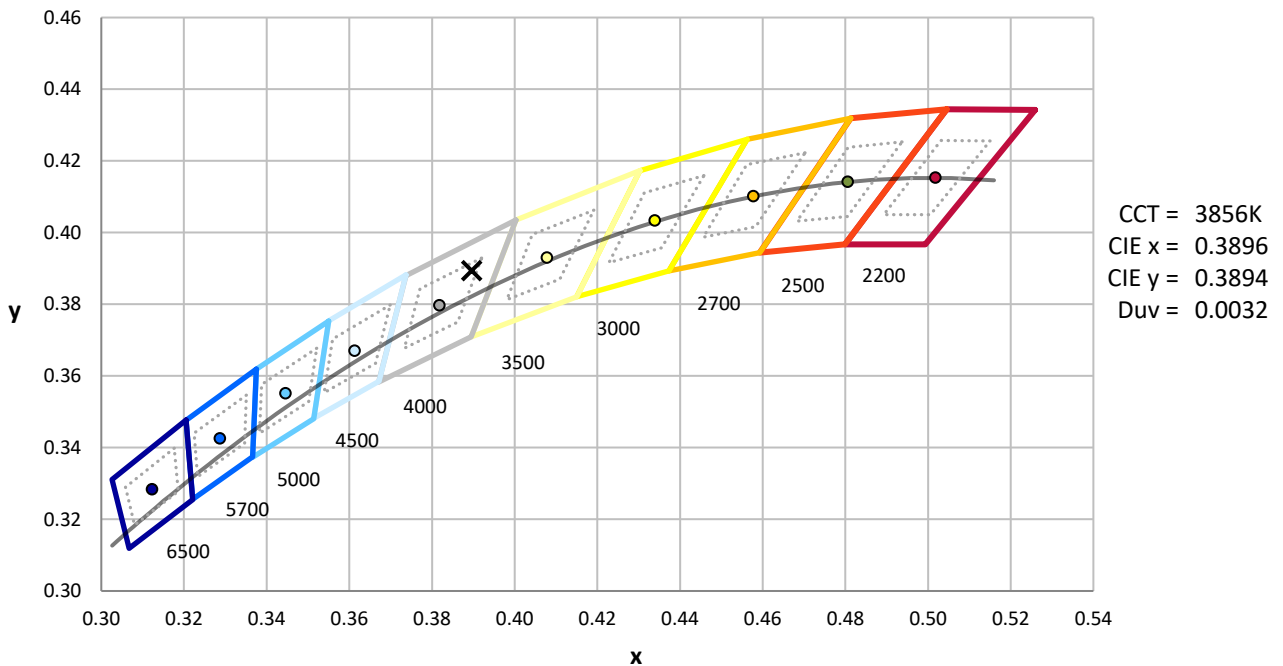

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2407-184-16

Photopic Flux vs. Wavelength

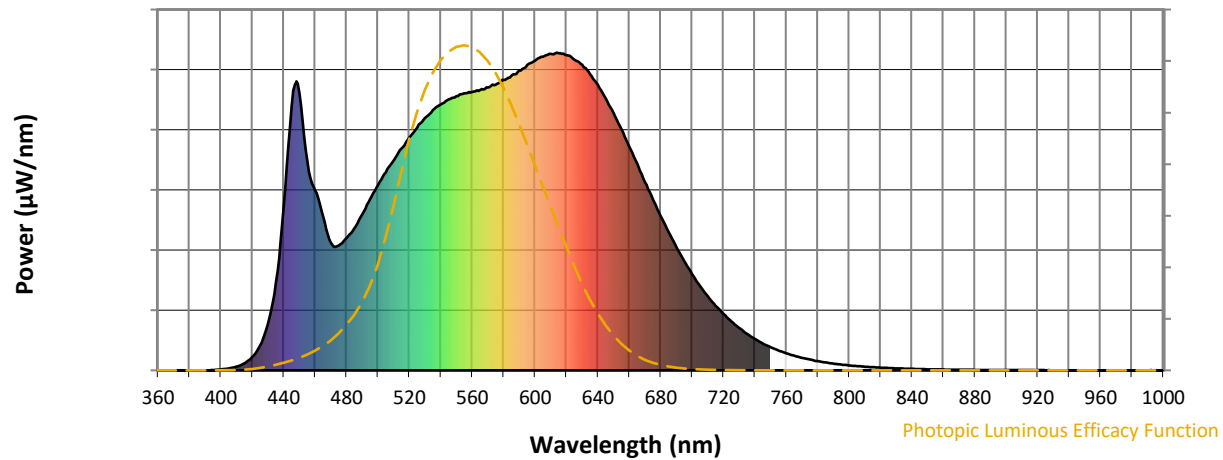


Photopic Lumens: NR

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16

Scotopic Flux vs. Wavelength

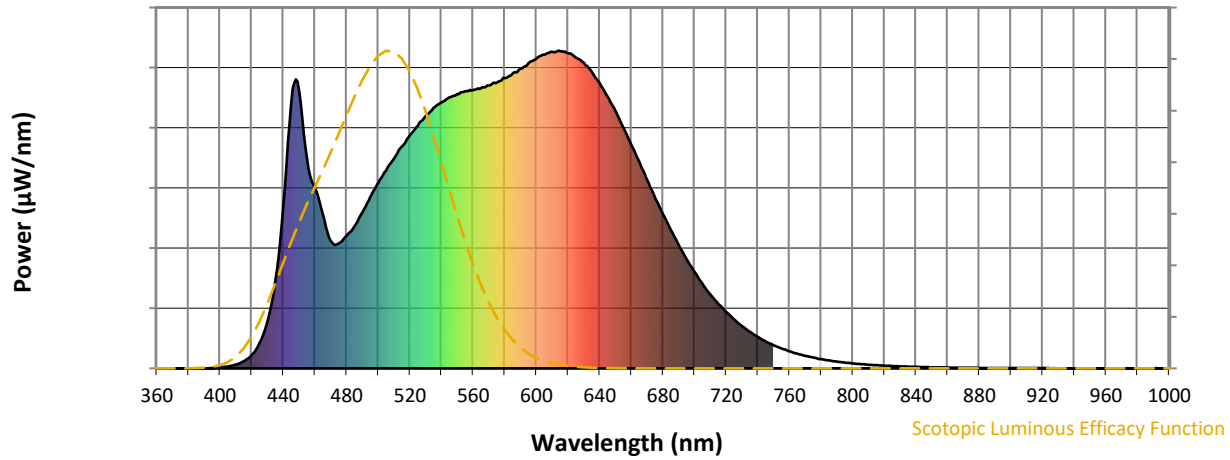


Scotopic Lumens: NR

S/P: 1.72

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16

Melanopic Flux vs. Wavelength

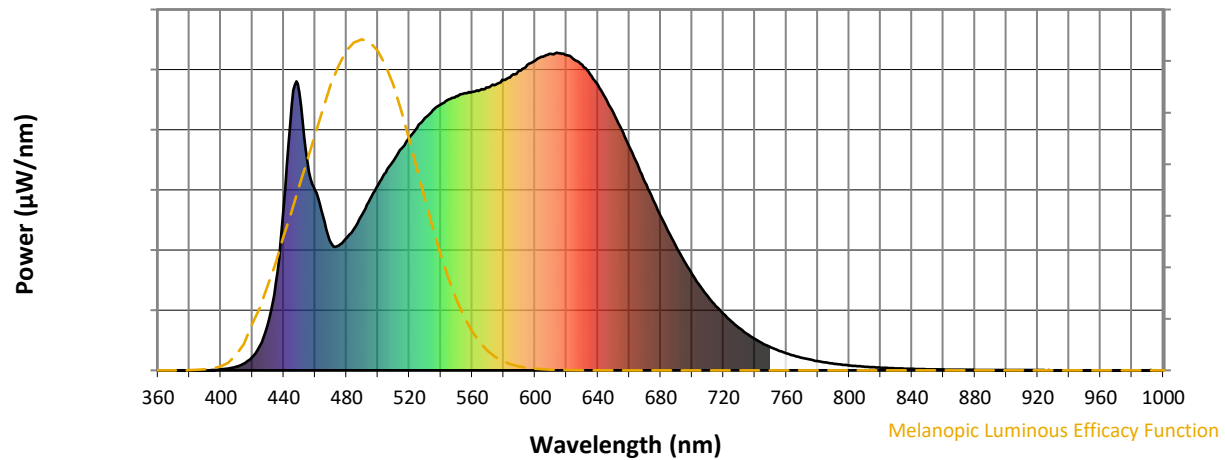

Melanopic Lumens: NR

M/P: 3.52


λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	492	NR	620	993	NR	750	73	NR	880	1	NR
365	0	NR	495	539	NR	625	978	NR	755	62	NR	885	1	NR
370	0	NR	500	583	NR	630	962	NR	760	54	NR	890	1	NR
375	0	NR	505	623	NR	635	933	NR	765	46	NR	895	1	NR
380	0	NR	510	661	NR	640	898	NR	770	39	NR	900	1	NR
385	0	NR	515	698	NR	645	855	NR	775	34	NR	905	1	NR
390	0	NR	520	733	NR	650	810	NR	780	29	NR	910	1	NR
395	1	NR	525	764	NR	655	759	NR	785	25	NR	915	1	NR
400	3	NR	530	794	NR	660	704	NR	790	21	NR	920	1	NR
405	6	NR	535	820	NR	665	651	NR	795	18	NR	925	1	NR
410	12	NR	540	837	NR	670	592	NR	800	16	NR	930	1	NR
415	22	NR	545	853	NR	675	538	NR	805	13	NR	935	0	NR
420	42	NR	550	864	NR	680	486	NR	810	12	NR	940	0	NR
425	79	NR	555	872	NR	685	435	NR	815	10	NR	945	0	NR
430	147	NR	560	876	NR	690	389	NR	820	9	NR	950	0	NR
435	278	NR	565	883	NR	695	344	NR	825	7	NR	955	0	NR
440	515	NR	570	891	NR	700	303	NR	830	6	NR	960	0	NR
445	832	NR	575	900	NR	705	266	NR	835	5	NR	965	0	NR
450	874	NR	580	914	NR	710	233	NR	840	5	NR	970	0	NR
455	659	NR	585	927	NR	715	203	NR	845	4	NR	975	0	NR
460	567	NR	590	944	NR	720	178	NR	850	4	NR	980	0	NR
465	485	NR	595	961	NR	725	154	NR	855	3	NR	985	0	NR
470	401	NR	600	975	NR	730	133	NR	860	3	NR	990	0	NR
475	393	NR	605	988	NR	735	115	NR	865	2	NR	995	1	NR
480	417	NR	610	996	NR	740	98	NR	870	2	NR	1000	0	NR
485	448	NR	615	998	NR	745	85	NR	875	2	NR			

REPORT NUMBER: SP1-2407-184-16





TM-30-18

Summary

$R_f = 91.8$
 $R_g = 98.4$
 $CIE\ R_a = 92.1$
 $R_9 = 60.7$

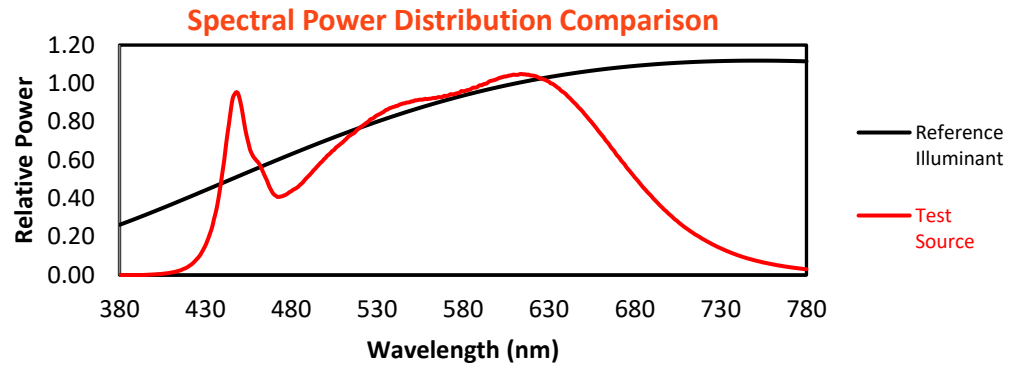


Color Vector Graphics

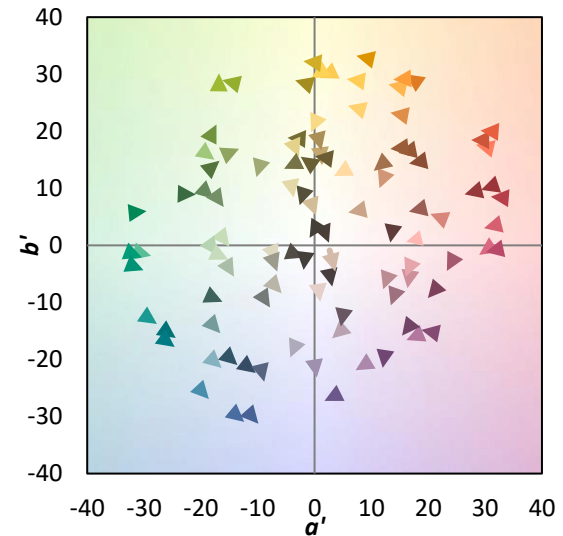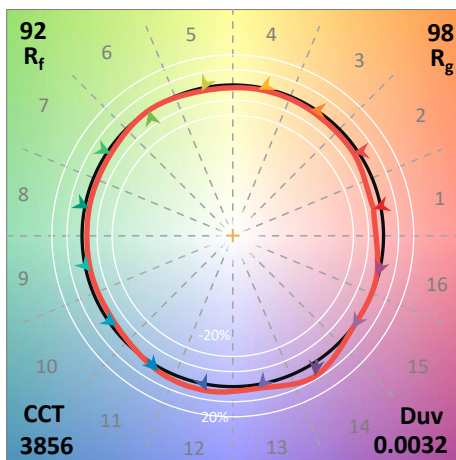
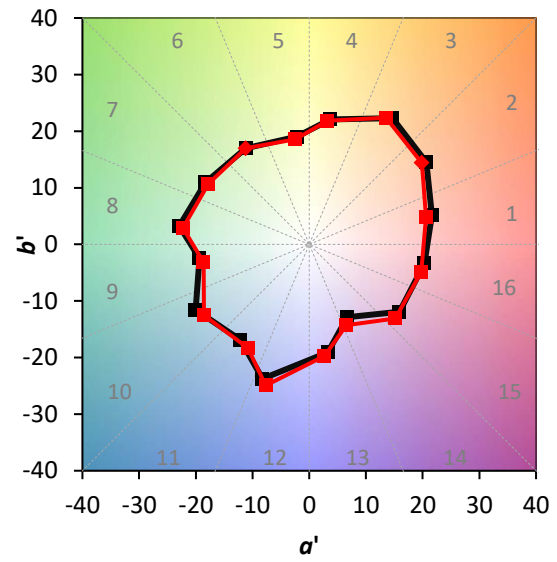
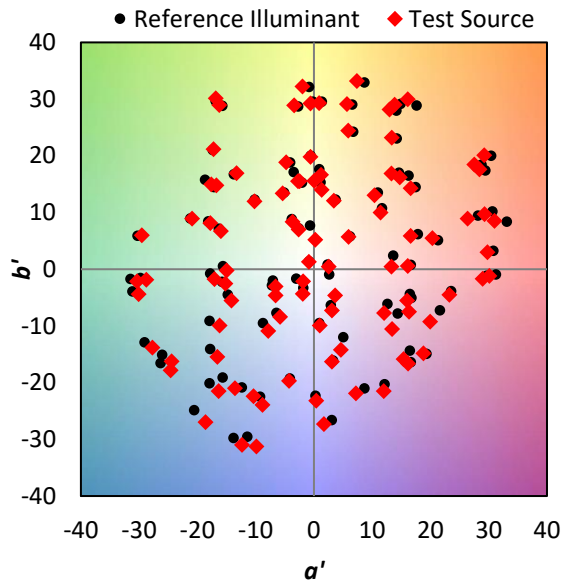


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 86	CES26 = 94	CES51 = 96	CES76 = 87
CES02 = 62	CES27 = 91	CES52 = 98	CES77 = 90
CES03 = 31	CES28 = 96	CES53 = 95	CES78 = 84
CES04 = 69	CES29 = 96	CES54 = 94	CES79 = 96
CES05 = 49	CES30 = 93	CES55 = 92	CES80 = 94
CES06 = 50	CES31 = 97	CES56 = 93	CES81 = 89
CES07 = 42	CES32 = 92	CES57 = 92	CES82 = 97
CES08 = 41	CES33 = 99	CES58 = 92	CES83 = 98
CES09 = 29	CES34 = 94	CES59 = 96	CES84 = 94
CES10 = 74	CES35 = 96	CES60 = 93	CES85 = 85
CES11 = 57	CES36 = 82	CES61 = 92	CES86 = 88
CES12 = 63	CES37 = 95	CES62 = 87	CES87 = 92
CES13 = 43	CES38 = 88	CES63 = 92	CES88 = 96
CES14 = 74	CES39 = 99	CES64 = 89	CES89 = 87
CES15 = 71	CES40 = 98	CES65 = 88	CES90 = 96
CES16 = 47	CES41 = 97	CES66 = 87	CES91 = 74
CES17 = 49	CES42 = 96	CES67 = 86	CES92 = 80
CES18 = 56	CES43 = 96	CES68 = 88	CES93 = 88
CES19 = 71	CES44 = 99	CES69 = 89	CES94 = 82
CES20 = 66	CES45 = 98	CES70 = 86	CES95 = 83
CES21 = 85	CES46 = 97	CES71 = 81	CES96 = 92
CES22 = 78	CES47 = 97	CES72 = 94	CES97 = 95
CES23 = 91	CES48 = 91	CES73 = 81	CES98 = 94
CES24 = 90	CES49 = 96	CES74 = 93	CES99 = 91
CES25 = 71	CES50 = 97	CES75 = 83	

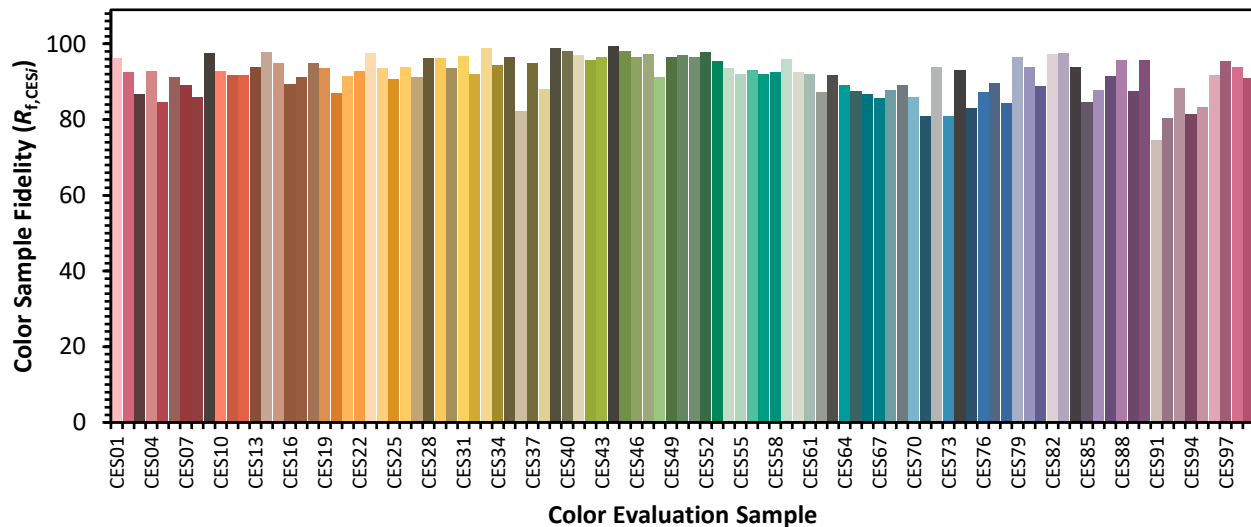

Color Rendition by Hue-Angle Bin

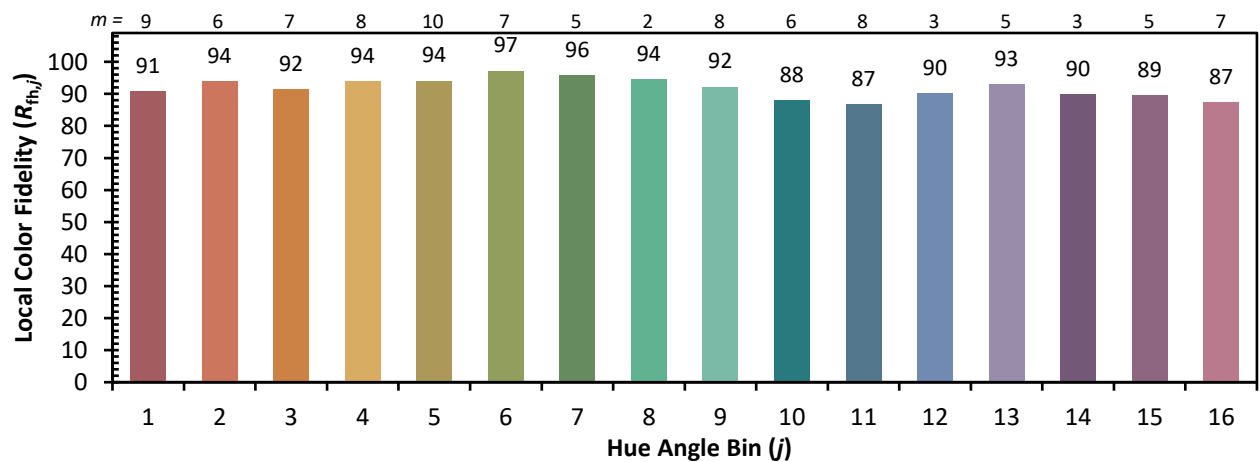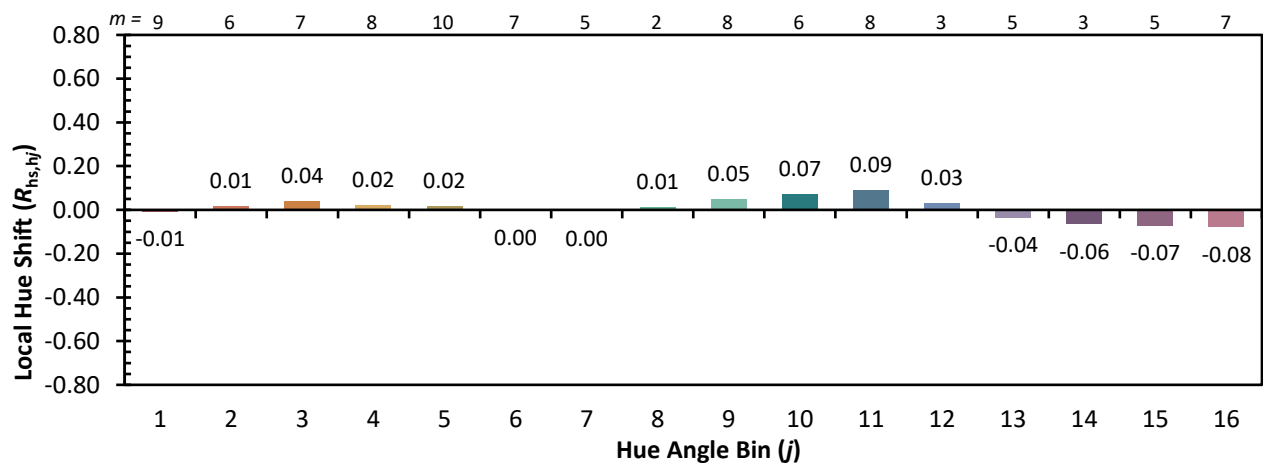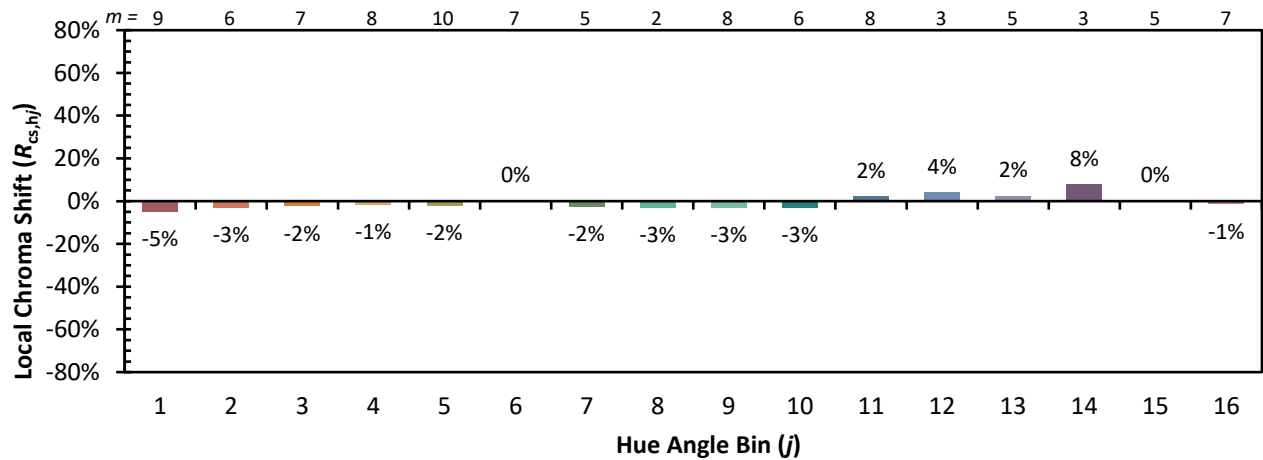

Measure Comparisons

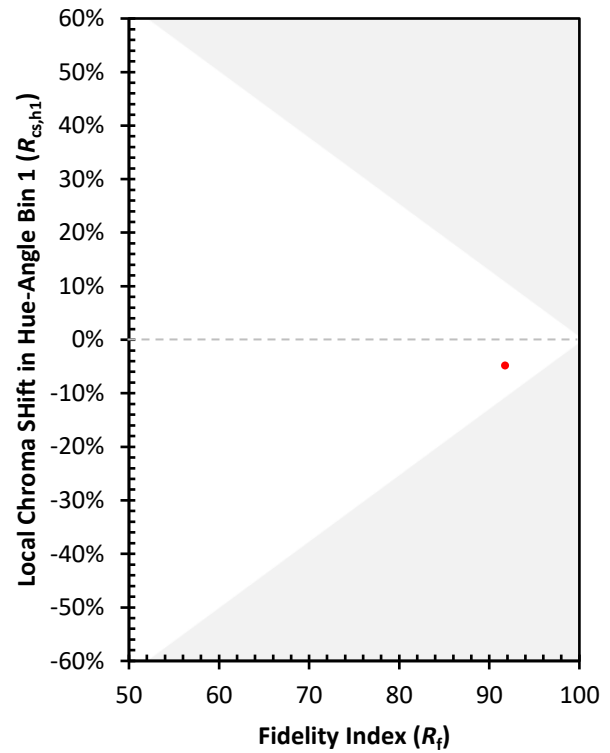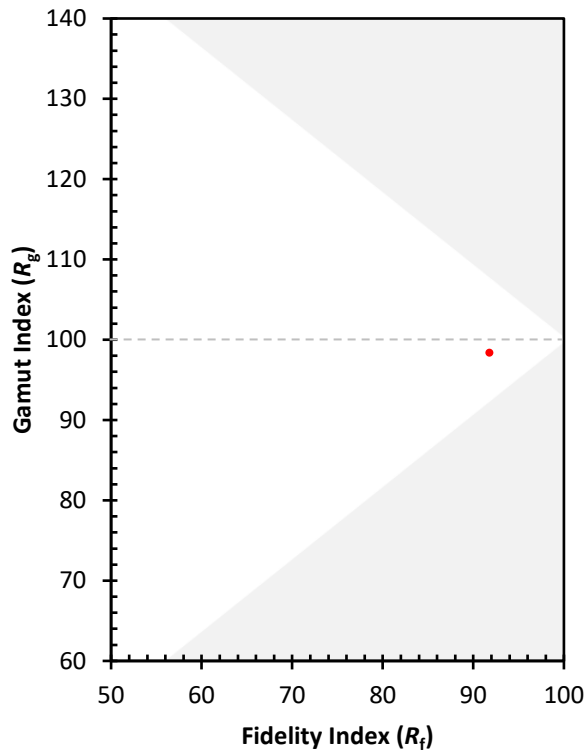

(END OF REPORT)