

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P957080

Luminaire Tested: **GLAN-SB9C-750-U-SL3-HSS**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P957080
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SB9C-750-U-SL3-HSS
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(9) 70 CRI, 5000K, 615mA LIGHTSQUARES WITH 26 LEDS EACH AND TYPE III
SPILL LIGHT ELIMINATOR OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 58117 lumens
Efficiency: N/A
Efficacy: 129.2 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type III - Medium
BUG Rating: B3 - U0 - G5


Input Watts (W): 449.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P957080
 CATALOG NUMBER: GLAN-SB9C-750-U-SL3-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

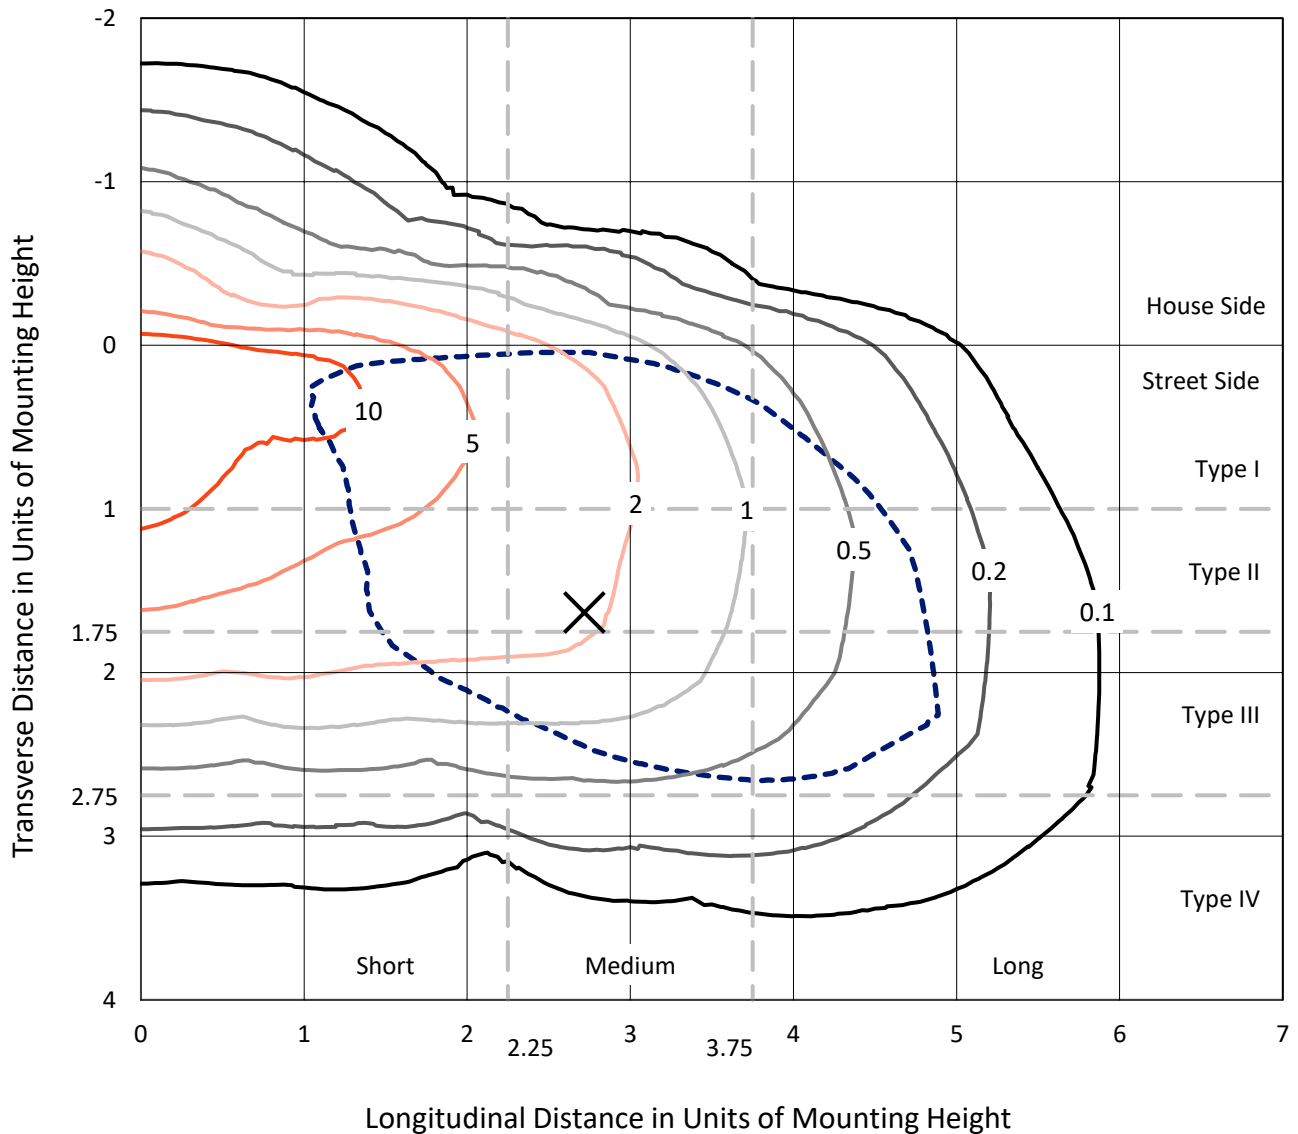

Based on 25 foot mounting height. Maximum calculated value = 17 fc
 Type III - Medium - N/A

REPORT NUMBER: P957080
CATALOG NUMBER: GLAN-SB9C-750-U-SL3-HSS

Luminous Intensity Polar Plot

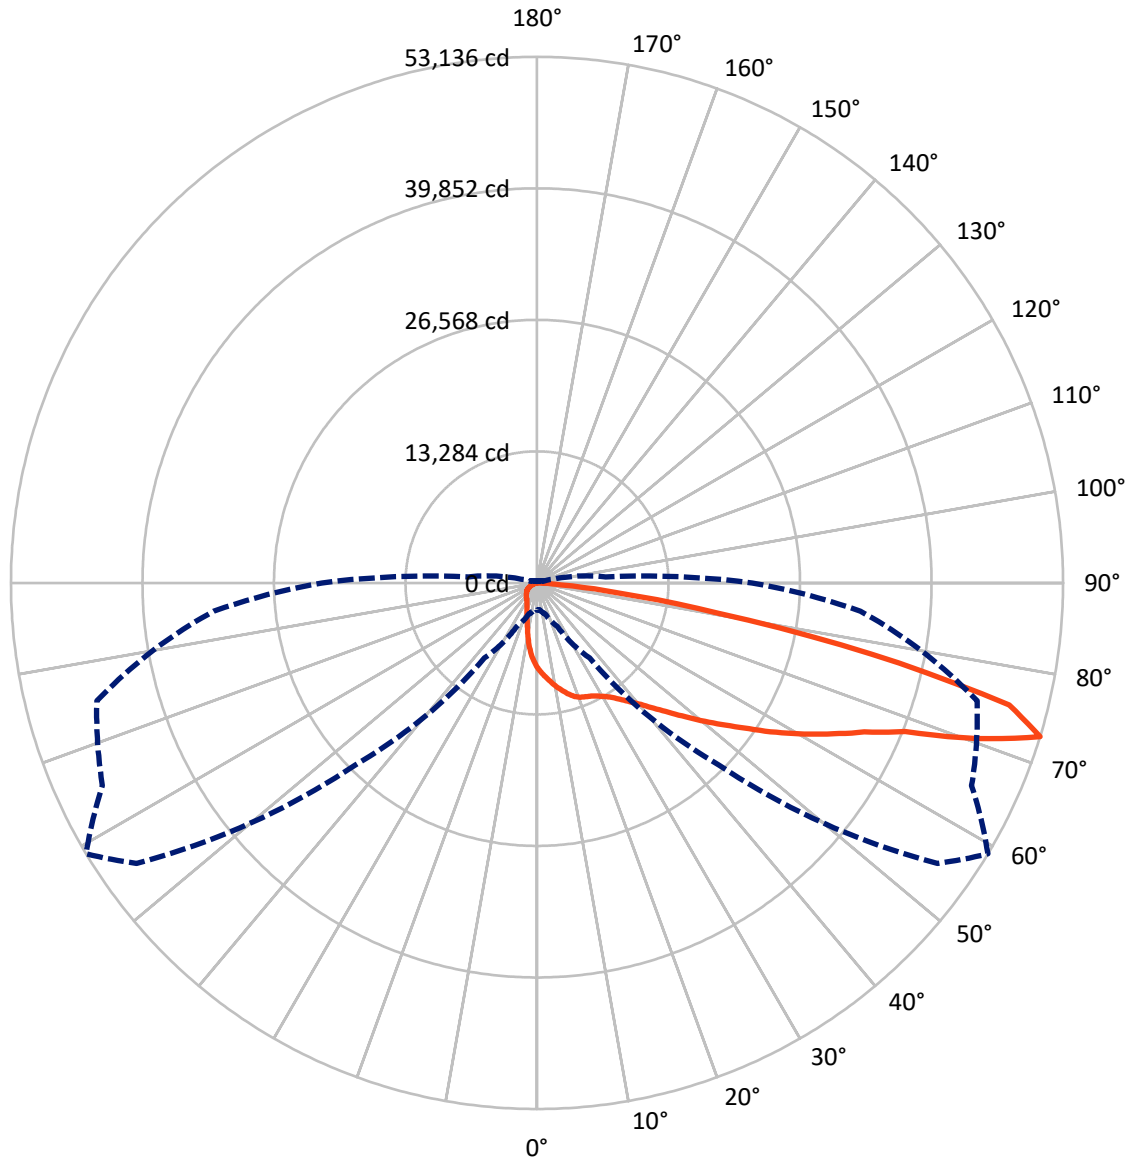

— Vertical Plane Through 59-Deg Lateral - - - Horizontal Cone Through 72.5-Deg Vertical

REPORT NUMBER: P957080
 CATALOG NUMBER: GLAN-SB9C-750-U-SL3-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	6138.4	0.0	6138.4
	% Fixture	10.6	0.0	10.6
Street Side	Lumens	51978.6	0.0	51978.6
	% Fixture	89.4	0.0	89.4
Total	Lumens	58117.0	0.0	58117.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	777.5	1.3
10°-20°	2065.3	3.6
20°-30°	3273.2	5.6
30°-40°	5252.8	9.0
40°-50°	8389.7	14.4
50°-60°	12147.2	20.9
60°-70°	14415.7	24.8
70°-80°	10701.6	18.4
80°-90°	1094.1	1.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	58117.0	100.0
0°-180°	58117.0	100.0

Coefficient of Utilization

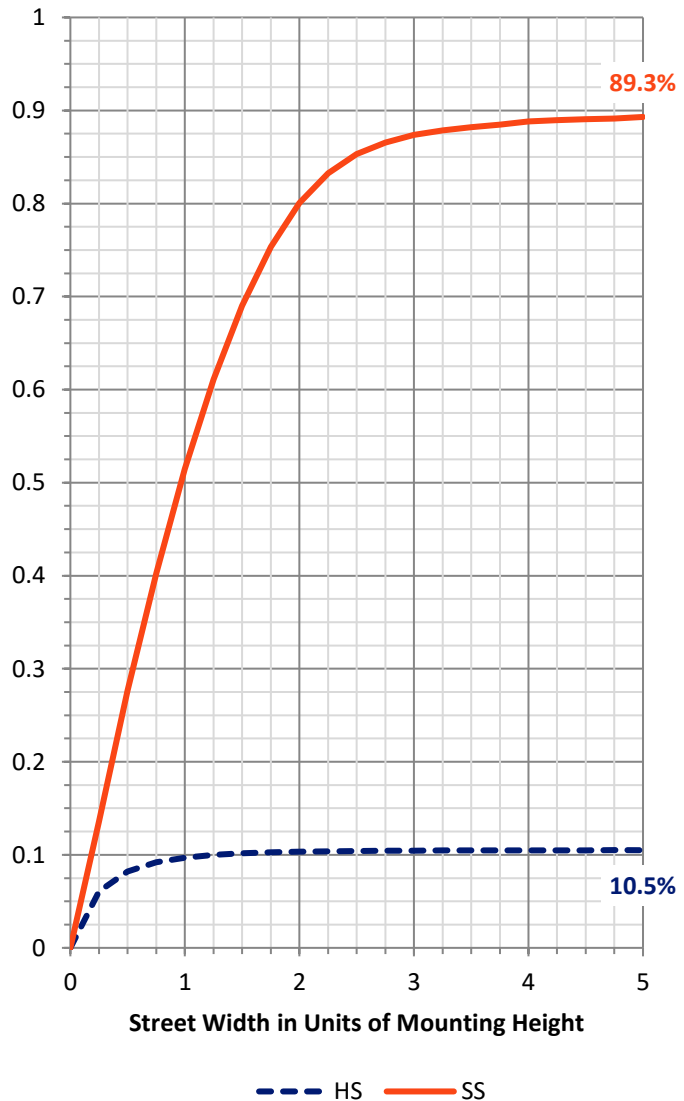


REPORT NUMBER: P957080
 CATALOG NUMBER: GLAN-SB9C-750-U-SL3-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	4543.5	7.8			
FM (30°-60°)	22943.8	39.5			
FH (60°-80°)	23424.5	40.3			G5
FVH (80°-90°)	1066.9	1.8			G5
BL (0°-30°)	1572.5	2.7	B3/2500		
BM (30°-60°)	2845.9	4.9	B3/5000		
BH (60°-80°)	1692.8	2.9	B3/2500		G3/2500
BVH (80°-90°)	27.2	0.0			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G5
 Type III Medium

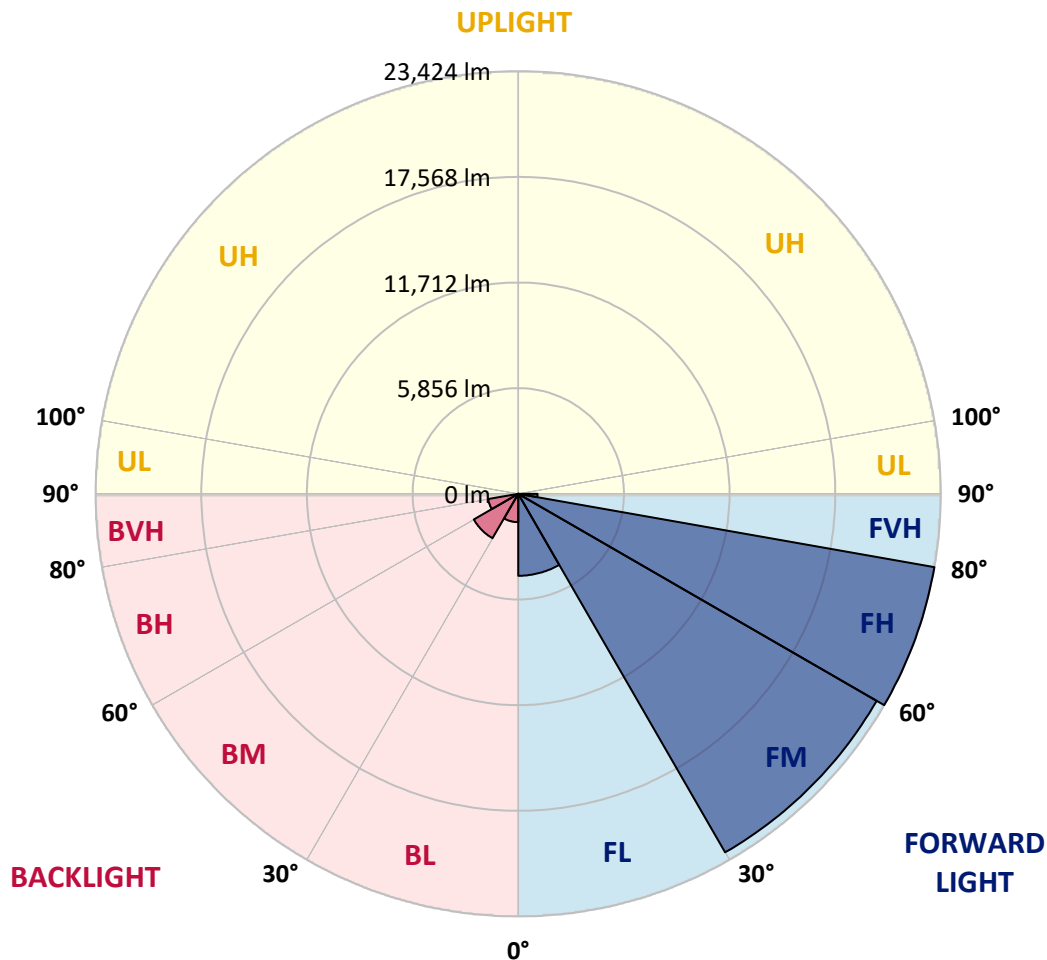

REPORT NUMBER: P957080
 CATALOG NUMBER: GLAN-SB9C-750-U-SL3-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	59°	65°	75°
0°	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1
2.5°	9535.1	9482.0	9489.6	9398.5	9334.0	9265.7	9132.9	9113.9	9019.1	8852.1
5°	10366.1	10331.9	10301.6	10199.1	10066.3	9899.4	9675.5	9595.8	9421.3	9132.9
7.5°	10973.2	10931.4	10946.6	10844.1	10737.9	10552.0	10244.6	10096.7	9865.2	9425.1
10°	11090.8	11068.0	11166.7	11204.6	11204.6	11087.0	10787.2	10639.3	10301.6	9740.0
12.5°	10430.6	10434.4	10681.0	10976.9	11364.0	11474.0	11272.9	11113.5	10779.6	10073.9
15°	9660.3	9664.1	9903.2	10282.6	10916.2	11549.9	11709.3	11606.8	11261.5	10434.4
17.5°	9197.4	9178.4	9337.8	9648.9	10312.9	11204.6	11974.9	12043.2	11762.4	10832.8
20°	9132.9	9098.8	9182.2	9337.8	9812.1	10772.1	12005.2	12327.7	12278.4	11284.3
22.5°	9527.5	9474.4	9428.9	9436.5	9637.6	10411.6	11929.3	12487.1	12809.6	11826.9
25°	10309.1	10225.7	10077.7	9888.0	9846.2	10335.7	11876.2	12661.6	13302.9	12521.2
27.5°	11265.3	11147.7	10863.1	10578.5	10335.7	10548.2	11986.2	12938.6	13860.6	13329.4
30°	12316.3	12172.2	11887.6	11348.8	10961.8	11022.5	12248.0	13302.9	14574.0	14243.9
32.5°	13860.6	13526.7	13029.7	12206.3	11694.1	11534.7	12642.7	13765.8	15458.0	15461.8
35°	15184.8	14998.9	14498.1	13473.6	12422.6	12213.9	13162.5	14418.4	16683.6	17074.4
37.5°	16053.7	15799.5	15359.4	14589.1	13553.3	12912.0	13856.8	15219.0	17981.3	18910.9
40°	17025.1	16774.7	16190.3	15465.6	14866.1	14111.1	14733.3	16141.0	19404.1	20796.6
42.5°	18197.5	17871.2	17180.7	16399.0	15773.0	15689.5	15879.2	17290.7	20864.9	22845.6
45°	19574.9	19267.5	18474.5	17488.0	16937.8	16789.8	17321.0	18630.1	22492.7	25091.8
47.5°	20864.9	20508.3	19654.5	18755.3	18144.4	17677.7	18853.9	20212.3	24336.7	27440.5
50°	21961.5	21597.2	20815.6	19855.6	19442.1	18831.2	20360.3	21976.7	26165.6	29827.1
52.5°	22712.8	22390.2	21472.0	20819.4	20538.6	20231.3	22124.6	23847.3	27986.9	32012.6
55°	22542.0	22253.6	21445.5	21399.9	21381.0	21703.5	24234.3	25968.3	29842.3	34080.5
57.5°	21999.4	21673.1	20663.8	21358.2	22029.8	23016.3	26518.5	28476.3	31876.0	36030.8
60°	20402.0	20288.2	19673.5	21278.5	22303.0	24302.6	29128.9	30995.7	34076.7	37745.8
62.5°	17021.3	17119.9	17116.1	21445.5	22796.2	25767.2	31500.4	33545.5	36228.1	39396.4
65°	12745.1	13086.6	13522.9	19942.9	23456.4	28381.5	34334.7	36311.6	38413.6	41316.3
67.5°	8563.8	8837.0	9132.9	16361.1	21491.0	31128.5	39043.5	40102.1	41031.7	43444.9
70°	4902.3	4989.5	5403.1	10218.1	16566.0	30369.7	46711.8	47095.0	44936.1	46066.8
72.5°	2747.1	2716.7	3263.1	4849.1	9258.1	26006.2	49398.2	53135.6	48430.6	46025.0
75°	1836.4	1840.2	2246.2	3058.2	3608.4	18205.1	42568.4	49269.2	46336.2	40811.6
77.5°	1252.1	1293.9	1650.5	2363.9	1669.5	8882.5	28161.4	34513.1	37514.4	31515.6
80°	542.6	546.4	1089.0	1696.1	1126.9	2826.8	14600.5	18489.7	23528.5	17696.7
82.5°	280.8	318.7	694.4	1096.6	709.5	990.3	6898.1	8078.1	9872.8	5194.4
85°	98.7	117.6	428.8	538.8	356.7	352.9	2401.8	2447.3	2090.7	781.6
87.5°	0.0	19.0	166.9	132.8	45.5	41.7	284.6	239.0	189.7	110.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P957080
 CATALOG NUMBER: GLAN-SB9C-750-U-SL3-HSS

CANDELA DISTRIBUTION (continued):

85°		90°	95°	105°	115°	125°	135°	145°	155°	165°	175°
8594.1	0°	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1	8594.1
8681.4	2.5°	8601.7	8499.3	8332.3	8127.4	7888.4	7759.4	7573.4	7459.6	7357.2	7361.0
8799.0	5°	8613.1	8442.3	8017.4	7565.9	7065.0	6697.0	6287.2	5998.8	5778.7	5725.6
8920.4	7.5°	8647.2	8358.9	7664.5	6913.2	6078.5	5460.0	4894.7	4538.0	4336.9	4283.8
9045.6	10°	8692.8	8267.8	7266.1	6116.4	5080.6	4336.9	3866.4	3638.7	3547.7	3479.4
9205.0	12.5°	8730.7	8173.0	6765.3	5293.1	4192.7	3612.2	3255.5	3065.8	2986.1	2936.8
9390.9	15°	8795.2	8047.7	6222.7	4526.6	3593.2	3118.9	2781.2	2640.8	2618.1	2625.7
9595.8	17.5°	8859.7	7926.3	5615.6	3927.1	3153.1	2686.4	2481.5	2458.7	2489.1	2519.4
9831.1	20°	8931.8	7751.8	5000.9	3475.6	2747.1	2386.6	2333.5	2348.7	2363.9	2417.0
10153.6	22.5°	9038.1	7531.7	4462.1	3092.4	2409.4	2242.4	2215.9	2227.3	2238.6	2291.8
10578.5	25°	9189.8	7296.5	4025.8	2739.5	2196.9	2124.8	2098.3	2098.3	2113.4	2162.8
11071.8	27.5°	9349.2	6962.6	3672.9	2413.2	2071.7	1995.8	1950.3	1950.3	1969.2	2026.2
11690.3	30°	9527.5	6659.0	3395.9	2170.3	1965.5	1866.8	1806.1	1790.9	1813.7	1885.8
12585.7	32.5°	9850.0	6461.7	3198.6	2056.5	1870.6	1749.2	1665.7	1624.0	1646.7	1730.2
13837.9	35°	10339.5	6416.2	3062.0	1999.6	1779.5	1642.9	1525.3	1460.8	1479.8	1567.1
15382.1	37.5°	10912.4	6511.0	2929.2	1923.7	1692.3	1540.5	1384.9	1301.4	1331.8	1411.5
17146.5	40°	11735.8	6905.7	2826.8	1866.8	1605.0	1419.1	1244.5	1161.1	1210.4	1278.7
18983.0	42.5°	12729.9	7607.6	2800.2	1813.7	1498.8	1290.1	1115.5	1054.8	1092.8	1157.3
20838.4	45°	13963.1	8503.1	2921.6	1745.4	1381.1	1164.9	1013.1	978.9	990.3	1054.8
22591.3	47.5°	15287.3	9421.3	3255.5	1684.7	1278.7	1062.4	933.4	903.0	895.5	956.2
24192.5	50°	16626.7	10237.1	3650.1	1639.1	1206.6	978.9	872.7	834.7	815.8	853.7
25774.8	52.5°	17950.9	10885.9	3908.1	1563.3	1134.5	895.5	819.6	762.7	728.5	747.5
27349.4	55°	19294.1	11455.0	3923.3	1449.4	1066.2	842.3	766.5	701.9	660.2	660.2
28867.1	57.5°	20550.0	11955.9	3699.5	1297.7	971.3	793.0	694.4	641.2	595.7	580.5
30214.1	60°	21661.7	12327.7	3327.6	1126.9	887.9	728.5	622.3	580.5	523.6	493.3
31413.1	62.5°	22652.1	12509.9	2819.2	952.4	785.4	652.6	554.0	508.4	432.6	394.6
32631.1	65°	23490.6	12323.9	2288.0	789.2	698.2	569.1	474.3	428.8	345.3	299.8
34000.8	67.5°	24321.5	11474.0	1730.2	664.0	607.1	478.1	390.8	349.1	288.4	250.4
34998.7	70°	24427.8	9686.9	1210.4	557.8	504.6	368.0	314.9	288.4	235.2	201.1
32771.5	72.5°	21745.2	6970.2	736.1	455.3	394.6	261.8	250.4	227.7	174.5	151.8
26776.5	75°	17381.7	4272.4	432.6	341.5	261.8	185.9	185.9	163.2	117.6	98.7
18485.9	77.5°	12012.8	2234.9	254.2	220.1	155.6	110.0	121.4	98.7	56.9	45.5
7323.0	80°	4811.2	849.9	136.6	102.4	72.1	49.3	41.7	22.8	11.4	7.6
1502.5	82.5°	960.0	223.9	45.5	26.6	26.6	11.4	0.0	0.0	0.0	0.0
413.6	85°	246.6	49.3	11.4	7.6	7.6	0.0	0.0	0.0	0.0	0.0
136.6	87.5°	75.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END O

180°
8594.1
7444.4
5805.3
4336.9
3521.1
2963.4
2637.0
2530.8
2432.2
2306.9
2181.7
2048.9
1904.7
1753.0
1593.6
1434.3
1290.1
1168.6
1085.2
994.1
868.9
762.7
667.8
584.3
485.7
390.8
299.8
250.4
197.3
148.0
98.7
45.5
11.4
0.0
0.0
0.0
0.0

F REPORT)