

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P953451

Luminaire Tested: **GLAN-SB7A-730-U-SLR-HSS**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P953451
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SB7A-730-U-SLR-HSS
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(7) 70 CRI, 3000K, 350mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR RIGHT OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 24347 lumens
Efficiency: N/A
Efficacy: 122.3 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U0 - G4

Input Watts (W): 199.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P953451

CATALOG NUMBER: GLAN-SB7A-730-U-SLR-HSS

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

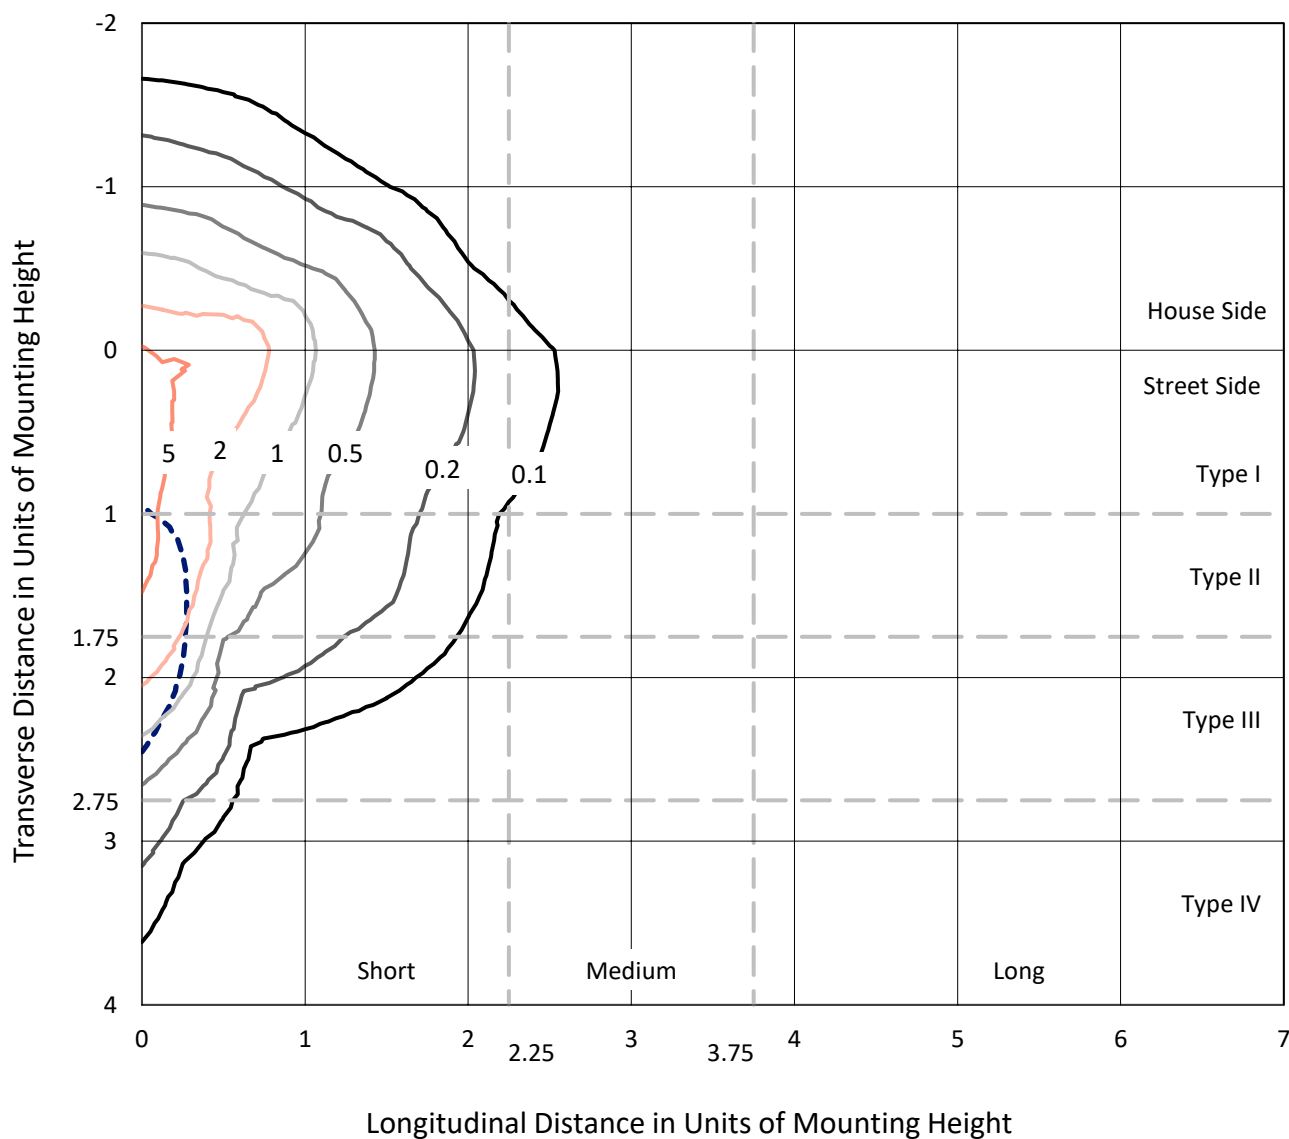


Based on 25 foot mounting height. Maximum calculated value = 7.5 fc

Type IV - Short - N/A

REPORT NUMBER: P953451
CATALOG NUMBER: GLAN-SB7A-730-U-SLR-HSS

Luminous Intensity Polar Plot

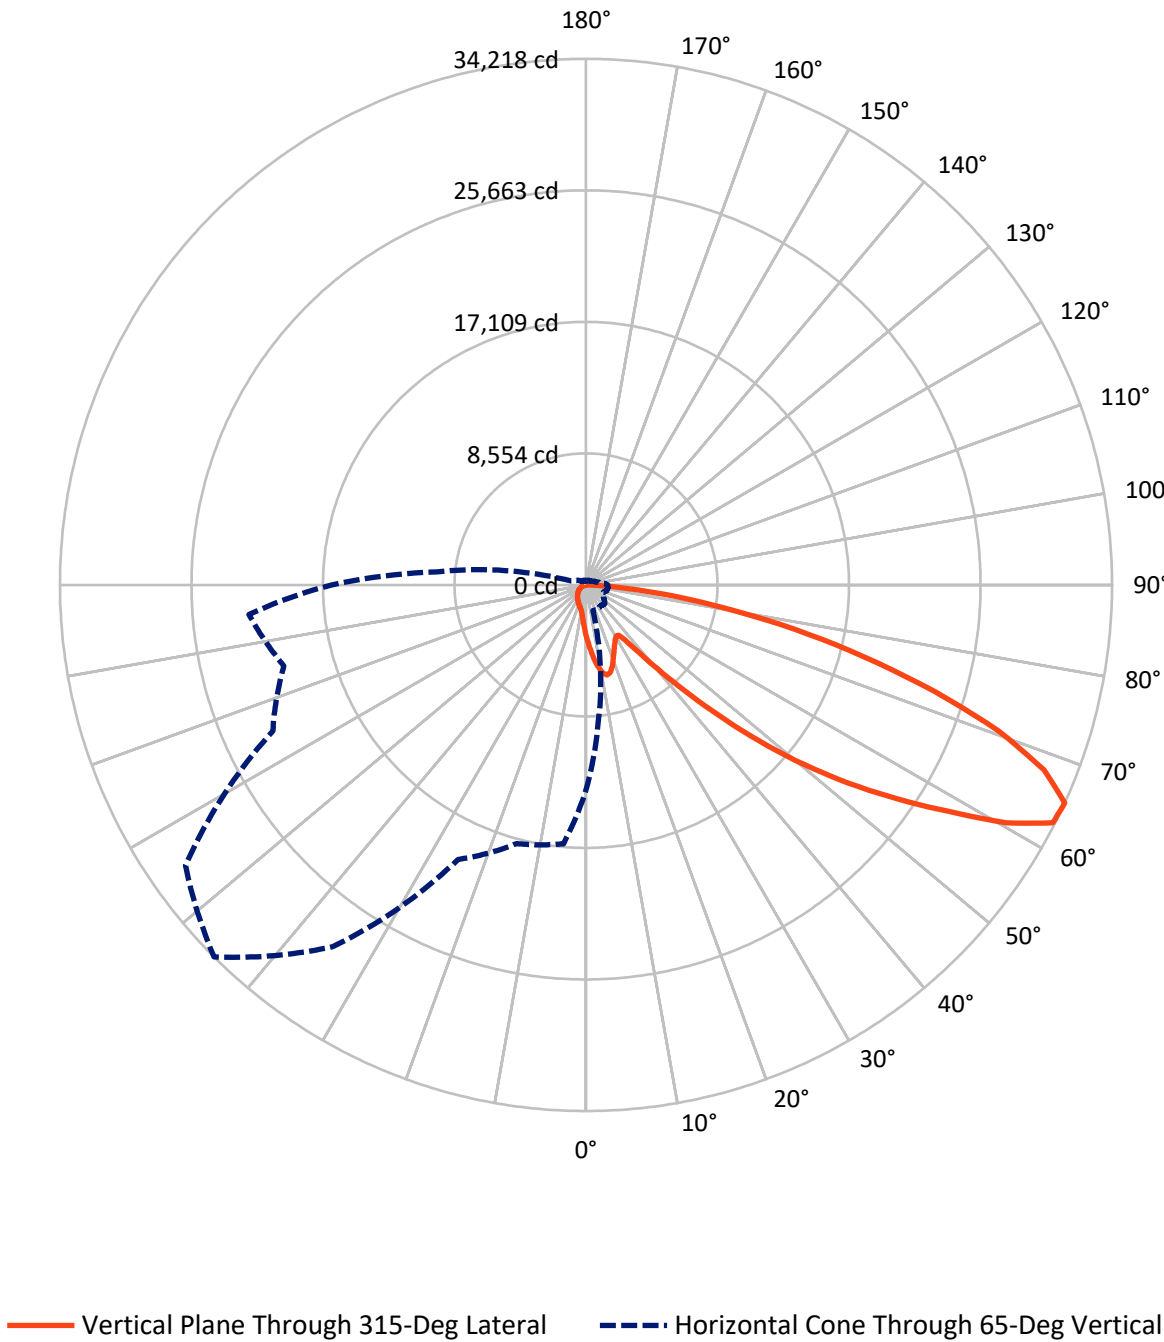

REPORT NUMBER: P953451

CATALOG NUMBER: GLAN-SB7A-730-U-SLR-HSS

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3409.6	0.0	3409.6
	% Fixture	14.0	0.0	14.0
Street Side	Lumens	20937.4	0.0	20937.4
	% Fixture	86.0	0.0	86.0
Total	Lumens	24347.0	0.0	24347.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	331.9	1.4
10°-20°	995.0	4.1
20°-30°	1465.8	6.0
30°-40°	1883.2	7.7
40°-50°	3045.6	12.5
50°-60°	5340.8	21.9
60°-70°	6682.8	27.4
70°-80°	3905.1	16.0
80°-90°	696.7	2.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	24347.0	100.0
0°-180°	24347.0	100.0

Coefficient of Utilization



REPORT NUMBER: P953451


CATALOG NUMBER: GLAN-SB7A-730-U-SLR-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1899.0	7.8			
FM	(30°-60°)	8533.4	35.0			
FH	(60°-80°)	9835.1	40.4			G4/12000
FVH	(80°-90°)	670.0	2.8			G4/750
BL	(0°-30°)	893.7	3.7	B2/1000		
BM	(30°-60°)	1736.3	7.1	B2/2500		
BH	(60°-80°)	752.9	3.1	B2/1000		G2/1000
BVH	(80°-90°)	26.8	0.1			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G4

Type IV Short

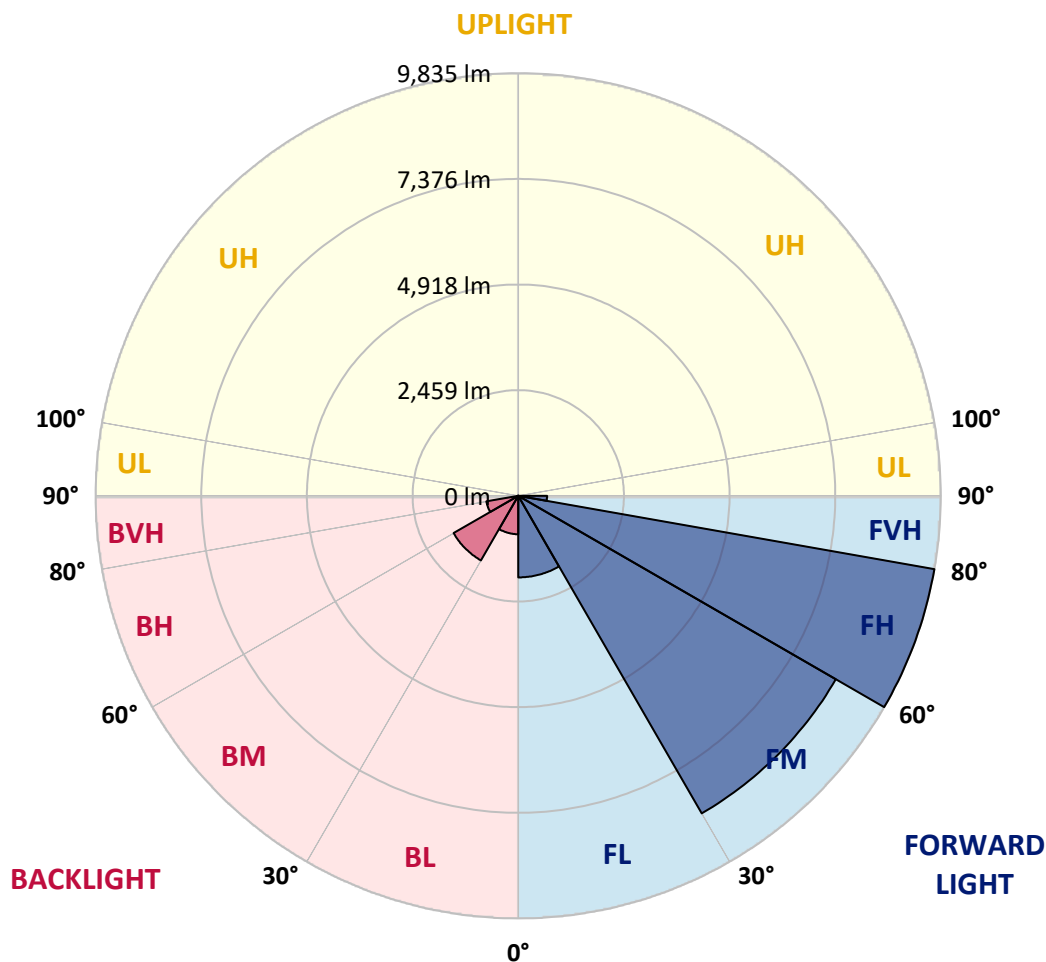

REPORT NUMBER: P953451

CATALOG NUMBER: GLAN-SB7A-730-U-SLR-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3
2.5°	3809.0	3743.6	3705.1	3609.5	3513.8	3436.7	3332.7	3263.9	3181.8	3102.9
5°	4245.1	4139.5	4012.0	3837.6	3678.2	3515.5	3357.9	3201.9	3037.5	2886.6
7.5°	4614.1	4461.5	4236.7	4005.3	3802.3	3606.1	3421.6	3215.3	3015.7	2779.2
10°	4895.9	4701.3	4406.1	4102.6	3869.4	3671.5	3492.0	3317.6	3116.3	2831.2
12.5°	5067.0	4859.0	4508.5	4152.9	3886.2	3664.8	3525.6	3448.4	3369.6	3086.1
15°	5192.8	4968.0	4580.6	4188.1	3847.6	3575.9	3473.6	3550.7	3641.3	3460.2
17.5°	5323.6	5087.1	4674.5	4203.2	3743.6	3403.1	3359.5	3559.1	3768.8	3760.4
20°	5447.7	5212.9	4756.7	4193.1	3575.9	3193.5	3232.1	3487.0	3730.2	3832.5
22.5°	5590.3	5342.1	4835.5	4154.6	3357.9	2997.3	3118.0	3373.0	3586.0	3706.7
25°	5764.7	5504.7	4946.2	4097.5	3123.0	2834.6	3002.3	3240.5	3413.2	3497.1
27.5°	5952.6	5699.3	5093.8	4067.3	2933.5	2718.8	2871.5	3082.8	3237.1	3295.8
30°	6185.7	5925.7	5268.3	4033.8	2809.4	2651.7	2735.6	2900.0	3050.9	3109.6
32.5°	6440.7	6177.3	5436.0	3953.3	2733.9	2601.4	2603.1	2707.1	2844.6	2915.1
35°	6759.3	6479.2	5615.4	3777.2	2673.5	2542.7	2473.9	2524.3	2638.3	2722.2
37.5°	7213.9	6875.1	5835.2	3525.6	2584.6	2452.1	2338.1	2349.8	2437.1	2529.3
40°	7841.2	7406.8	6093.5	3263.9	2457.2	2324.7	2188.8	2183.8	2247.5	2338.1
42.5°	8689.9	8109.5	6403.8	3014.0	2334.7	2170.4	2031.2	2022.8	2073.1	2151.9
45°	9810.3	9008.5	6784.5	2799.3	2239.1	2019.4	1881.9	1878.5	1920.5	1989.2
47.5°	11244.3	10258.1	7165.2	2653.4	2188.8	1900.3	1759.4	1766.1	1803.0	1865.1
50°	13101.0	11886.7	7281.0	2579.6	2188.8	1836.6	1650.4	1684.0	1714.2	1761.1
52.5°	15326.7	13449.9	6898.5	2512.5	2202.2	1845.0	1558.2	1630.3	1652.1	1692.3
55°	17389.8	14216.4	5930.8	2420.3	2205.6	1897.0	1479.3	1586.7	1626.9	1642.0
57.5°	18587.3	13953.1	4795.3	2264.3	2192.2	1932.2	1429.0	1533.0	1610.2	1620.2
60°	18359.2	13028.9	3530.6	2145.2	2093.2	1918.8	1413.9	1450.8	1573.3	1588.4
62.5°	16601.5	11479.1	2450.5	2053.0	1875.2	1860.1	1408.9	1321.7	1492.8	1529.7
65°	13344.2	9037.0	1730.9	1767.8	1643.7	1732.6	1382.1	1187.5	1395.5	1445.8
67.5°	9681.1	6115.3	1249.6	1432.4	1489.4	1526.3	1321.7	1090.2	1284.8	1351.9
70°	6212.5	3302.5	877.2	946.0	1254.6	1296.5	1217.7	1003.0	1172.4	1249.6
72.5°	4416.2	1950.6	630.6	662.5	1008.0	1080.2	1071.8	905.7	1041.6	1135.5
75°	3047.6	1075.1	426.0	473.0	731.3	877.2	826.9	778.2	882.2	977.8
77.5°	1910.4	481.4	254.9	328.7	479.7	689.4	566.9	602.1	687.7	776.6
80°	1063.4	186.2	142.6	218.0	261.7	501.5	313.6	387.4	506.5	570.3
82.5°	231.5	23.5	63.7	93.9	102.3	291.8	166.0	224.8	318.7	313.6
85°	0.0	0.0	11.7	13.4	6.7	125.8	60.4	73.8	104.0	97.3
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P953451

CATALOG NUMBER: GLAN-SB7A-730-U-SLR-HSS

CANDELA DISTRIBUTION (continued):

90°		95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
3371.3	0°	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3
3032.5	2.5°	3019.1	2936.9	2876.5	2846.3	2821.1	2844.6	2858.0	2858.0	2915.1	2948.6
2794.3	5°	2735.6	2588.0	2475.6	2400.2	2354.9	2370.0	2386.7	2405.2	2477.3	2525.9
2653.4	7.5°	2539.4	2312.9	2141.9	2036.2	1980.8	1989.2	2001.0	2016.1	2086.5	2135.1
2673.5	10°	2502.5	2177.1	1935.6	1796.3	1729.2	1717.5	1710.8	1705.8	1747.7	1784.6
2901.6	12.5°	2653.4	2183.8	1846.7	1677.3	1595.1	1559.8	1519.6	1487.7	1494.4	1517.9
3247.2	15°	2923.5	2269.3	1818.1	1615.2	1512.9	1454.2	1407.2	1368.6	1360.3	1368.6
3549.1	17.5°	3232.1	2385.1	1814.8	1561.5	1434.1	1373.7	1335.1	1299.9	1288.1	1289.8
3718.5	20°	3436.7	2477.3	1804.7	1501.1	1358.6	1304.9	1271.4	1236.1	1224.4	1227.7
3671.5	22.5°	3456.8	2525.9	1789.6	1434.1	1283.1	1237.8	1204.3	1172.4	1170.7	1170.7
3495.4	25°	3347.8	2525.9	1757.8	1373.7	1211.0	1170.7	1140.5	1102.0	1108.7	1112.0
3295.8	27.5°	3178.4	2465.6	1697.4	1325.0	1148.9	1107.0	1076.8	1041.6	1050.0	1055.0
3109.6	30°	3010.7	2388.4	1625.3	1269.7	1090.2	1041.6	1019.8	989.6	992.9	999.6
2925.1	32.5°	2854.7	2306.2	1539.7	1224.4	1031.5	982.9	966.1	932.6	937.6	944.3
2744.0	35°	2700.4	2215.7	1439.1	1170.7	977.8	929.2	915.8	877.2	880.6	890.6
2562.8	37.5°	2534.3	2120.0	1356.9	1117.1	925.8	875.5	862.1	821.9	825.2	836.9
2375.0	40°	2359.9	2026.1	1276.4	1060.0	870.5	820.2	808.4	764.8	768.2	781.6
2190.5	42.5°	2183.8	1923.8	1214.3	986.2	813.5	759.8	748.1	707.8	712.8	727.9
2029.5	45°	2021.1	1801.4	1174.1	904.0	759.8	699.4	687.7	650.8	660.8	677.6
1893.6	47.5°	1881.9	1675.6	1157.3	835.3	702.8	637.4	627.3	597.1	613.9	632.3
1777.9	50°	1762.8	1554.8	1135.5	764.8	649.1	583.7	573.6	553.5	575.3	593.7
1699.1	52.5°	1677.3	1417.3	1088.5	701.1	602.1	538.4	535.0	525.0	545.1	561.9
1640.4	55°	1603.5	1274.7	1013.1	645.7	560.2	499.8	503.2	498.1	514.9	528.3
1605.1	57.5°	1536.4	1150.6	917.5	602.1	514.9	466.3	476.3	469.6	478.0	486.4
1568.2	60°	1455.9	1024.8	803.4	553.5	461.2	432.7	444.5	426.0	424.3	427.7
1501.1	62.5°	1336.8	855.4	684.3	493.1	414.3	395.8	400.9	365.6	338.8	338.8
1402.2	65°	1170.7	687.7	573.6	426.0	360.6	345.5	342.2	291.8	254.9	251.6
1294.8	67.5°	977.8	565.2	476.3	358.9	300.2	290.2	293.5	256.6	219.7	216.4
1187.5	70°	796.7	468.0	384.1	286.8	231.5	241.5	256.6	219.7	184.5	179.5
1061.7	72.5°	647.4	372.4	300.2	219.7	171.1	199.6	218.0	179.5	145.9	142.6
905.7	75°	499.8	273.4	214.7	149.3	124.1	154.3	171.1	130.8	104.0	99.0
701.1	77.5°	333.8	169.4	120.8	93.9	73.8	105.7	114.1	68.8	60.4	58.7
509.9	80°	202.9	78.8	52.0	45.3	25.2	38.6	45.3	28.5	31.9	33.5
271.7	82.5°	102.3	21.8	8.4	1.7	0.0	0.0	13.4	6.7	13.4	16.8
73.8	85°	8.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.4	8.4
0.0	87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P953451

CATALOG NUMBER: GLAN-SB7A-730-U-SLR-HSS

CANDELA DISTRIBUTION (continued):

185°		195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
3371.3	0°	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3
2962.0	2.5°	3056.0	3126.4	3193.5	3300.8	3411.5	3520.6	3631.3	3738.6	3777.2	3805.7
2557.8	5°	2703.7	2836.2	2990.5	3203.6	3431.7	3666.5	3904.6	4122.7	4221.6	4288.7
2177.1	7.5°	2339.8	2512.5	2733.9	3054.3	3411.5	3785.6	4159.6	4503.4	4662.8	4791.9
1818.1	10°	1979.2	2167.0	2447.1	2812.8	3295.8	3832.5	4349.1	4822.1	5028.4	5191.1
1559.8	12.5°	1662.2	1838.3	2131.8	2536.0	3114.7	3795.6	4458.1	5026.7	5269.9	5452.8
1375.3	15°	1439.1	1563.2	1823.2	2259.3	2900.0	3676.5	4464.9	5124.0	5390.7	5581.9
1298.2	17.5°	1315.0	1356.9	1526.3	1977.5	2661.8	3520.6	4402.8	5157.6	5442.7	5620.5
1229.4	20°	1247.9	1254.6	1301.5	1611.8	2356.5	3374.6	4344.1	5191.1	5491.3	5640.6
1180.8	22.5°	1194.2	1194.2	1205.9	1318.3	1962.4	3200.2	4325.6	5249.8	5558.4	5650.7
1125.4	25°	1145.6	1145.6	1148.9	1179.1	1554.8	2933.5	4313.9	5340.4	5650.7	5675.8
1070.1	27.5°	1095.2	1096.9	1096.9	1113.7	1252.9	2571.2	4263.6	5457.8	5761.4	5709.4
1016.4	30°	1044.9	1048.3	1048.3	1060.0	1108.7	2146.9	4164.6	5598.7	5905.6	5753.0
962.7	32.5°	994.6	998.0	998.0	1008.0	1043.3	1714.2	4040.5	5727.8	6051.5	5771.4
910.7	35°	942.6	947.6	944.3	957.7	994.6	1363.6	3882.8	5857.0	6209.2	5830.1
860.4	37.5°	890.6	894.0	892.3	905.7	947.6	1177.4	3700.0	5954.3	6423.9	5961.0
806.8	40°	838.6	836.9	836.9	852.0	897.3	1123.8	3470.2	6108.6	6732.5	6190.7
753.1	42.5°	785.0	785.0	781.6	798.4	853.7	1083.5	3250.5	6385.3	7182.0	6556.4
702.8	45°	736.3	734.6	727.9	743.0	811.8	1013.1	3173.4	6901.9	7846.2	7148.5
652.5	47.5°	689.4	687.7	670.9	684.3	761.5	949.3	3461.9	7747.2	8767.0	8019.0
612.2	50°	647.4	649.1	617.2	629.0	711.2	900.7	4087.5	8844.2	9989.7	9191.4
578.7	52.5°	608.8	608.8	566.9	573.6	649.1	857.1	4682.9	10033.3	11603.2	10826.7
543.4	55°	570.3	566.9	519.9	523.3	587.0	795.0	4771.8	11194.0	13803.8	13287.2
504.9	57.5°	526.7	519.9	476.3	476.3	530.0	749.7	4136.1	12086.3	16534.4	16903.4
432.7	60°	473.0	468.0	439.4	431.1	484.7	790.0	2918.4	12190.3	18295.5	21712.1
343.8	62.5°	404.2	410.9	395.8	384.1	441.1	820.2	1729.2	11353.3	17869.5	23241.7
266.7	65°	318.7	345.5	342.2	333.8	484.7	691.0	1021.4	9746.5	16562.9	22007.2
233.1	67.5°	271.7	290.2	285.1	285.1	508.2	525.0	642.4	7614.7	14764.9	20543.0
194.6	70°	231.5	249.9	231.5	231.5	384.1	318.7	444.5	5316.9	12824.3	18922.8
156.0	72.5°	191.2	209.7	189.5	176.1	306.9	238.2	325.4	3322.6	10982.7	17235.5
110.7	75°	145.9	167.7	152.6	135.9	202.9	177.8	246.6	1930.5	9099.1	14746.4
67.1	77.5°	92.2	120.8	114.1	95.6	149.3	129.1	177.8	1148.9	7021.0	11522.7
40.3	80°	57.0	62.1	63.7	60.4	85.5	87.2	120.8	654.1	4805.3	8030.7
25.2	82.5°	36.9	36.9	28.5	31.9	41.9	50.3	68.8	246.6	2824.5	4889.2
15.1	85°	26.8	23.5	15.1	15.1	20.1	25.2	26.8	75.5	1145.6	1930.5
6.7	87.5°	13.4	11.7	5.0	6.7	10.1	8.4	6.7	3.4	288.5	617.2
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P953451

CATALOG NUMBER: GLAN-SB7A-730-U-SLR-HSS

CANDELA DISTRIBUTION (continued):

285°		295°	305°	315°	325°	335°	345°	355°	360°
3371.3	0°	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3	3371.3
3869.4	2.5°	3903.0	3955.0	3958.3	3958.3	3913.0	3911.4	3819.1	3809.0
4439.7	5°	4595.7	4629.2	4637.6	4620.8	4530.3	4463.2	4283.7	4245.1
5021.7	7.5°	5229.7	5296.8	5296.8	5256.5	5108.9	4971.4	4711.4	4614.1
5503.1	10°	5736.2	5813.4	5796.6	5714.4	5528.2	5338.7	5023.4	4895.9
5794.9	12.5°	5982.8	6061.6	6018.0	5924.1	5742.9	5543.3	5211.2	5067.0
5878.8	15°	5977.7	5955.9	5910.6	5898.9	5811.7	5660.7	5350.4	5192.8
5826.8	17.5°	5764.7	5580.2	5545.0	5662.4	5773.1	5736.2	5471.2	5323.6
5702.7	20°	5427.6	5105.6	5073.7	5298.4	5613.8	5774.8	5583.6	5447.7
5523.2	22.5°	5072.0	4724.8	4651.0	4899.3	5373.9	5786.5	5726.1	5590.3
5325.3	25°	4734.9	4386.0	4312.2	4543.7	5107.2	5766.4	5880.5	5764.7
5135.8	27.5°	4453.1	4116.0	4047.2	4278.7	4850.6	5709.4	6034.8	5952.6
4947.9	30°	4235.1	3923.1	3872.8	4095.9	4629.2	5638.9	6231.0	6185.7
4773.5	32.5°	4107.6	3879.5	3897.9	4080.8	4510.1	5561.8	6418.9	6440.7
4687.9	35°	4233.4	4243.5	4404.5	4479.9	4620.8	5550.0	6673.8	6759.3
4790.2	37.5°	4859.0	5207.9	5541.6	5479.6	5162.6	5685.9	7054.5	7213.9
5236.4	40°	5924.1	6640.2	7182.0	6945.5	6147.1	6101.8	7603.0	7841.2
6028.1	42.5°	7225.6	8439.9	9332.2	8698.2	7416.8	6829.8	8386.3	8689.9
6985.8	45°	8599.3	10658.9	12064.5	10746.2	8770.4	7849.5	9572.1	9810.3
7883.1	47.5°	10046.8	13356.0	15174.1	13017.2	10024.9	9010.2	11189.0	11244.3
8733.5	50°	11630.1	16313.0	18344.1	15286.5	11235.9	10340.3	13164.8	13101.0
9724.7	52.5°	13137.9	19353.8	21447.0	17565.9	12299.3	11990.7	15457.6	15326.7
11079.9	55°	14577.0	22393.0	24568.4	19756.4	13302.3	14171.1	18181.4	17389.8
13033.9	57.5°	16245.9	25125.3	27785.4	21956.9	14704.5	17002.3	21227.3	18587.3
16775.9	60°	18713.1	28229.9	31423.4	24972.6	17371.3	19977.8	22319.2	18359.2
21257.5	62.5°	21863.0	31084.5	34068.4	27928.0	20049.9	20538.0	20710.7	16601.5
20343.4	65°	22475.2	31807.4	34217.7	28717.9	19704.4	17421.6	16908.4	13344.2
18171.4	67.5°	20851.6	30500.9	32131.2	27247.0	17430.0	13463.3	12688.4	9681.1
16745.7	70°	19030.1	28010.1	28494.9	24746.2	15330.1	9902.5	8569.1	6212.5
15769.5	72.5°	17163.3	24687.5	23684.5	21490.7	13473.4	7210.5	6180.7	4416.2
14379.1	75°	14946.0	20318.3	18656.1	17856.0	11155.4	5659.1	4471.6	3047.6
12368.1	77.5°	11968.9	14301.9	13857.5	13840.7	8382.9	4134.4	2983.8	1910.4
9662.7	80°	8443.3	9281.9	9055.5	10424.1	5623.8	2998.9	1796.3	1063.4
6725.8	82.5°	4087.5	5132.4	5268.3	6207.5	2735.6	1764.5	414.3	231.5
2629.9	85°	1600.1	2475.6	2088.2	2356.5	768.2	491.4	10.1	0.0
432.7	87.5°	179.5	286.8	263.3	208.0	93.9	20.1	0.0	0.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)