

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P954522

Luminaire Tested: **GLAN-SB7D-730-U-SLR-HSS**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P954522
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SB7D-730-U-SLR-HSS
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(7) 70 CRI, 3000K, 900mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR RIGHT OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 55231 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B3 - U0 - G5

Input Watts (W): 512.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P954522

CATALOG NUMBER: GLAN-SB7D-730-U-SLR-HSS

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
- - - 1/2 Max cd

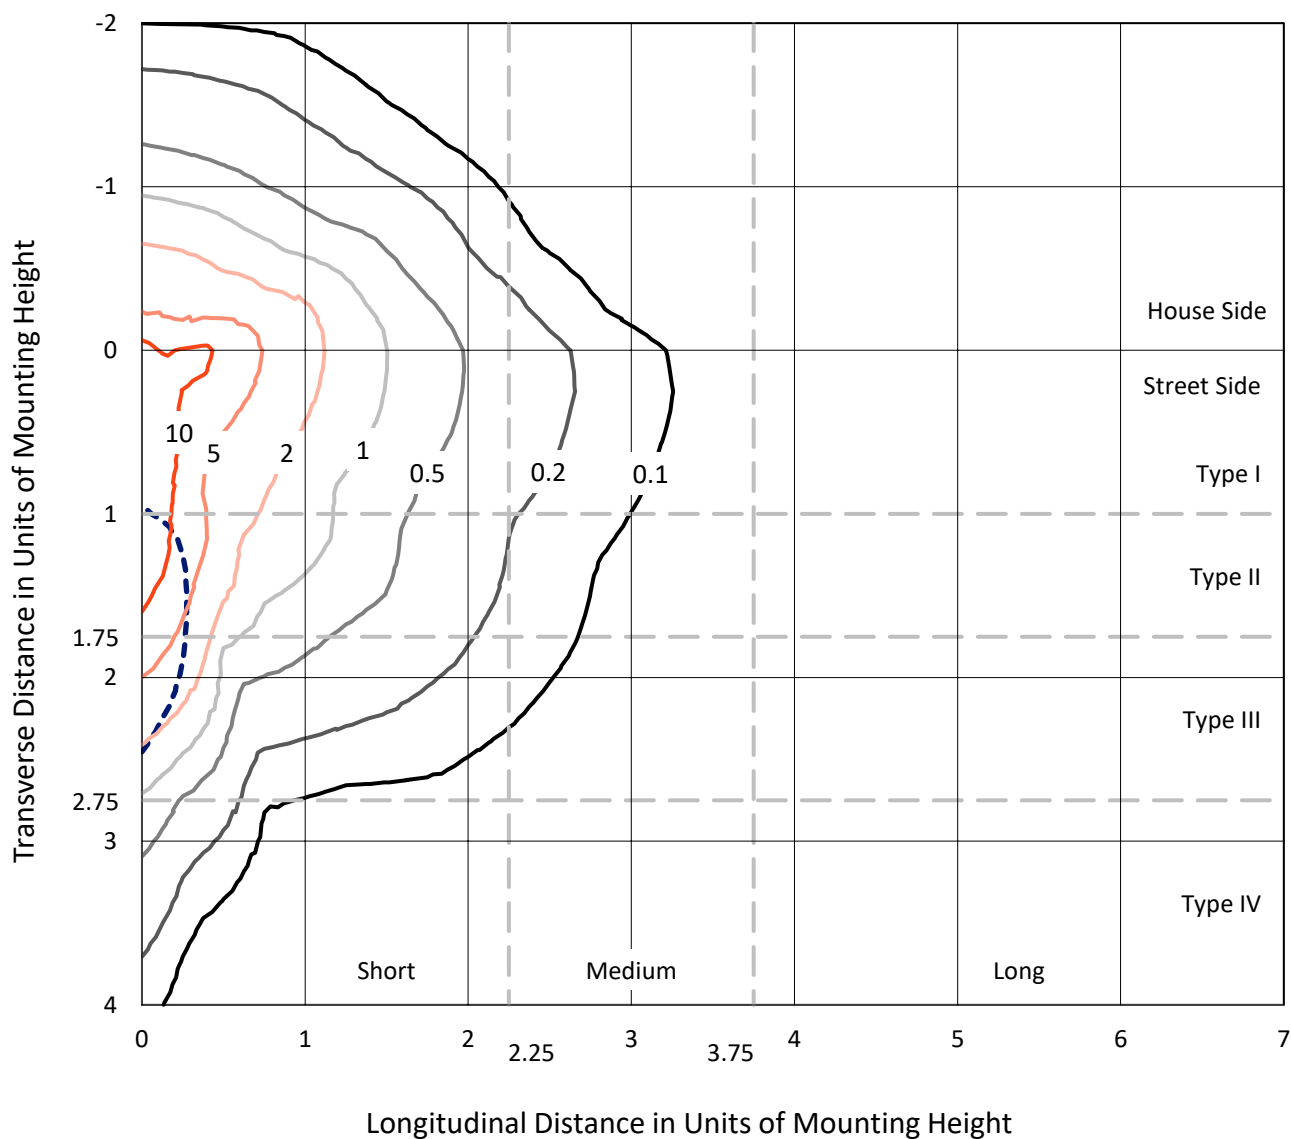


Based on 25 foot mounting height. Maximum calculated value = 17 fc

Type IV - Short - N/A

REPORT NUMBER: P954522
CATALOG NUMBER: GLAN-SB7D-730-U-SLR-HSS

Luminous Intensity Polar Plot

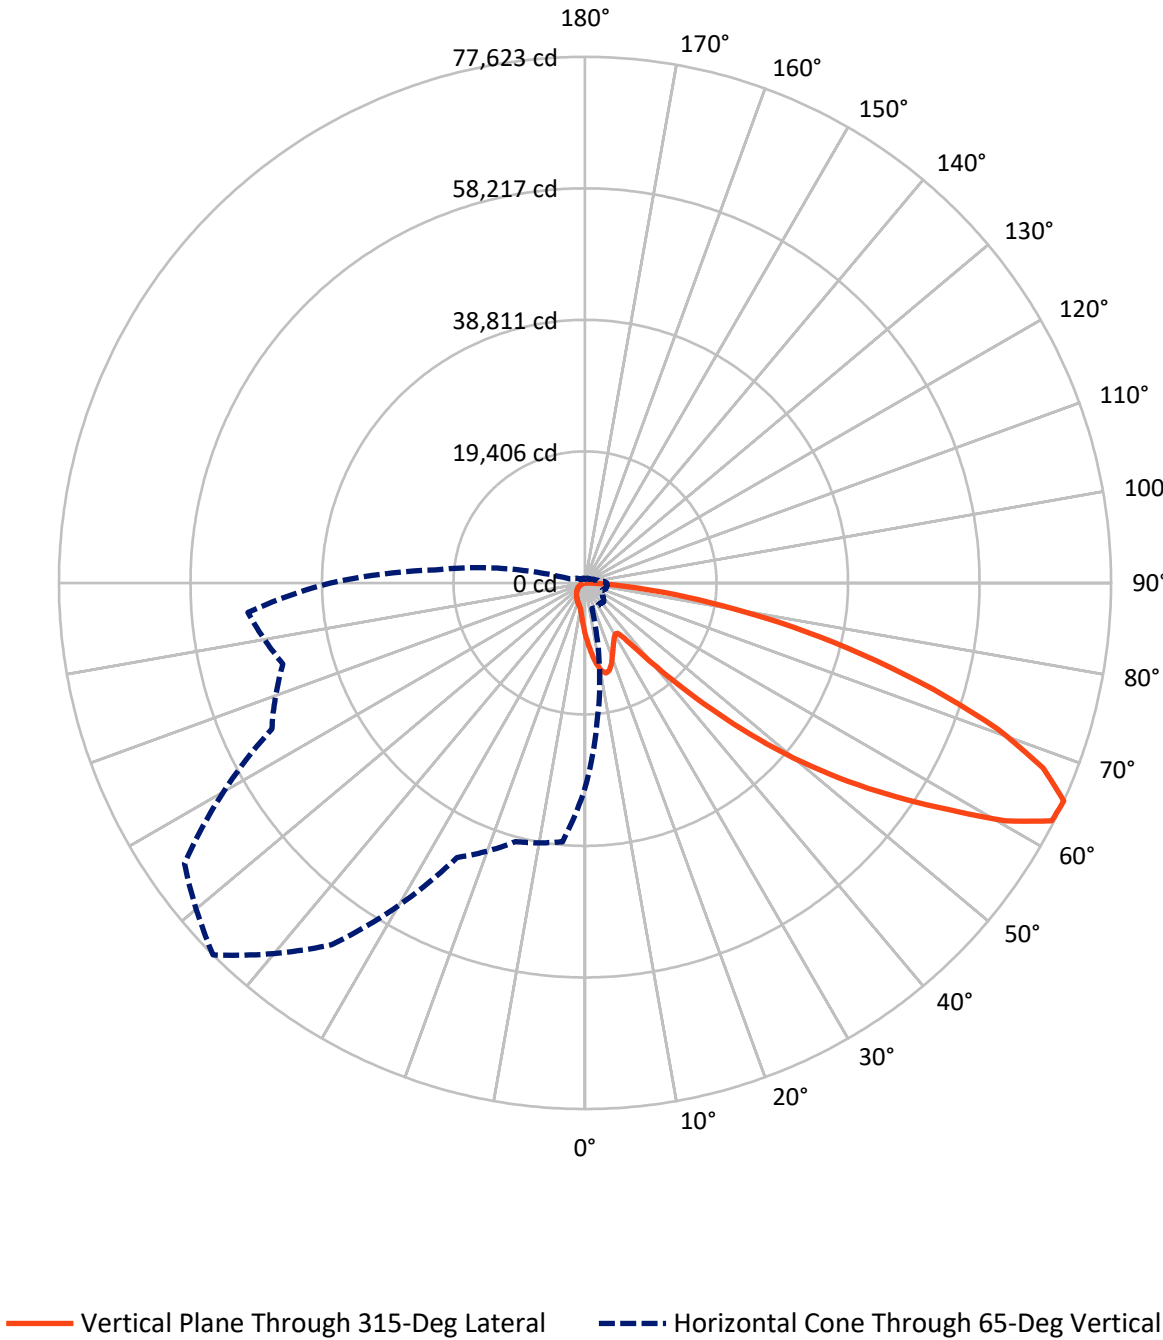

REPORT NUMBER: P954522

CATALOG NUMBER: GLAN-SB7D-730-U-SLR-HSS

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	7734.7	0.0	7734.7
	% Fixture	14.0	0.0	14.0
Street Side	Lumens	47496.3	0.0	47496.3
	% Fixture	86.0	0.0	86.0
Total	Lumens	55231.0	0.0	55231.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	752.9	1.4
10°-20°	2257.1	4.1
20°-30°	3325.2	6.0
30°-40°	4271.9	7.7
40°-50°	6909.0	12.5
50°-60°	12115.6	21.9
60°-70°	15159.9	27.4
70°-80°	8858.8	16.0
80°-90°	1580.5	2.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	55231.0	100.0
0°-180°	55231.0	100.0

Coefficient of Utilization



REPORT NUMBER: P954522


CATALOG NUMBER: GLAN-SB7D-730-U-SLR-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	4307.8	7.8			
FM	(30°-60°)	19357.9	35.0			
FH	(60°-80°)	22310.8	40.4			G5
FVH	(80°-90°)	1519.8	2.8			G5
BL	(0°-30°)	2027.4	3.7	B3/2500		
BM	(30°-60°)	3938.7	7.1	B3/5000		
BH	(60°-80°)	1707.9	3.1	B3/2500		G3/2500
BVH	(80°-90°)	60.7	0.1			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G5

Type IV Short

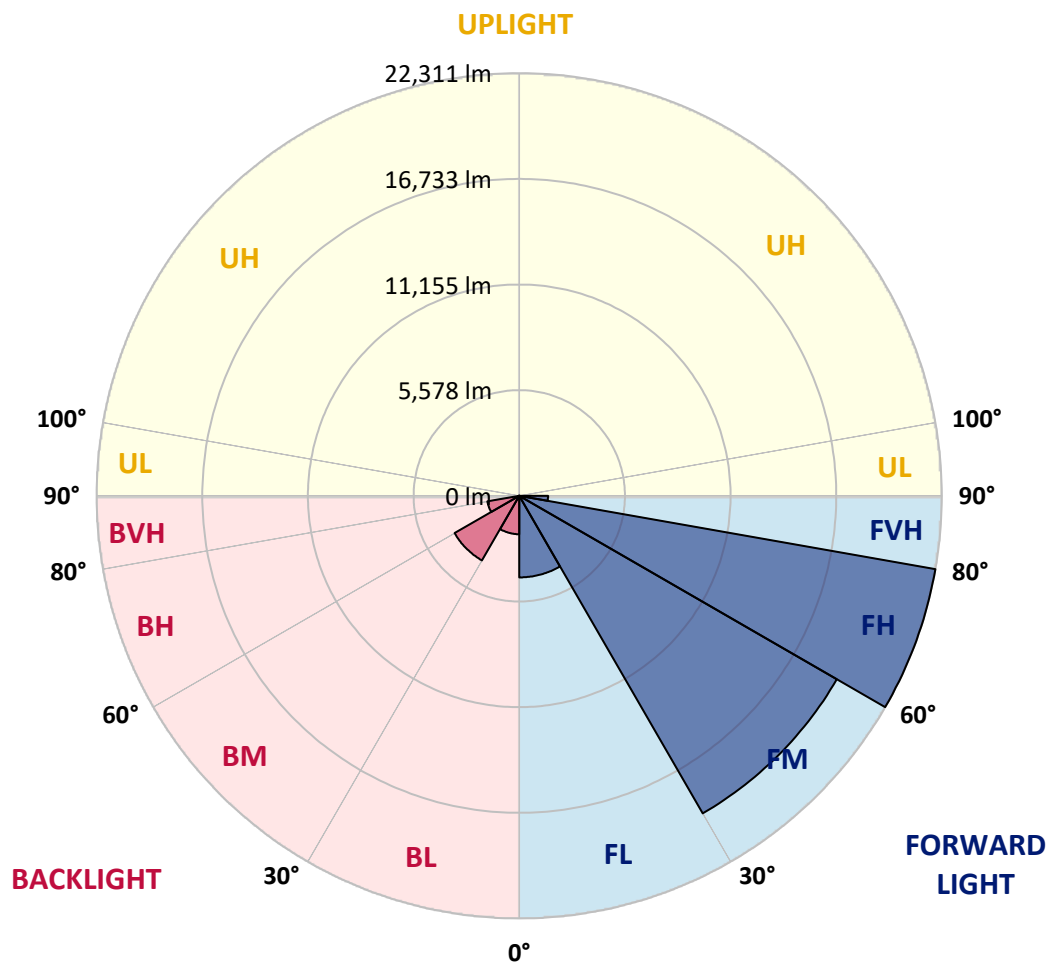

REPORT NUMBER: P954522

CATALOG NUMBER: GLAN-SB7D-730-U-SLR-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7
2.5°	8640.8	8492.4	8404.9	8188.0	7971.1	7796.1	7560.2	7404.2	7217.8	7039.0
5°	9630.0	9390.3	9101.2	8705.5	8344.0	7974.9	7617.3	7263.4	6890.6	6548.1
7.5°	10467.1	10120.9	9611.0	9086.0	8625.6	8180.4	7761.9	7293.9	6841.1	6304.6
10°	11106.3	10665.0	9995.3	9306.6	8777.8	8328.8	7921.7	7526.0	7069.4	6422.6
12.5°	11494.4	11022.6	10227.4	9420.8	8815.8	8313.6	7997.8	7822.7	7643.9	7000.9
15°	11779.8	11269.9	10391.0	9500.7	8728.3	8111.9	7879.8	8054.8	8260.3	7849.4
17.5°	12076.6	11540.1	10604.1	9534.9	8492.4	7720.0	7621.1	8073.9	8549.5	8530.4
20°	12358.1	11825.4	10790.5	9512.1	8111.9	7244.4	7331.9	7910.3	8462.0	8694.1
22.5°	12681.5	12118.4	10969.4	9424.6	7617.3	6799.2	7073.2	7651.5	8134.7	8408.7
25°	13077.2	12487.5	11220.5	9295.2	7084.6	6430.2	6810.7	7350.9	7742.8	7933.1
27.5°	13503.4	12928.8	11555.3	9226.7	6654.7	6167.6	6513.9	6993.3	7343.3	7476.5
30°	14032.2	13442.5	11951.0	9150.6	6373.1	6015.5	6205.7	6578.6	6921.0	7054.2
32.5°	14610.6	14013.2	12331.5	8968.0	6201.9	5901.3	5905.1	6141.0	6453.0	6612.8
35°	15333.5	14698.1	12738.6	8568.5	6064.9	5768.1	5612.1	5726.3	5985.0	6175.3
37.5°	16364.6	15596.0	13237.0	7997.8	5863.3	5562.7	5303.9	5330.6	5528.4	5737.7
40°	17787.6	16802.2	13823.0	7404.2	5574.1	5273.5	4965.3	4953.9	5098.5	5303.9
42.5°	19712.9	18396.4	14526.9	6837.3	5296.3	4923.5	4607.7	4588.6	4702.8	4881.6
45°	22254.5	20435.8	15390.6	6350.3	5079.5	4581.0	4269.0	4261.4	4356.5	4512.5
47.5°	25507.6	23270.4	16254.3	6019.3	4965.3	4310.9	3991.3	4006.5	4090.2	4231.0
50°	29719.6	26964.9	16516.8	5851.8	4965.3	4166.3	3744.0	3820.1	3888.5	3995.1
52.5°	34768.6	30511.0	15649.3	5699.6	4995.8	4185.3	3534.7	3698.3	3747.8	3839.1
55°	39448.6	32249.8	13453.9	5490.4	5003.4	4303.3	3355.9	3599.4	3690.7	3724.9
57.5°	42165.2	31652.5	10878.0	5136.5	4972.9	4383.2	3241.7	3477.6	3652.6	3675.5
60°	41647.8	29556.0	8009.2	4866.4	4748.4	4352.7	3207.5	3291.2	3568.9	3603.2
62.5°	37660.3	26040.3	5558.9	4657.1	4253.8	4219.6	3196.1	2998.2	3386.3	3470.0
65°	30271.3	20500.5	3926.6	4010.3	3728.7	3930.4	3135.2	2693.8	3165.6	3279.8
67.5°	21961.5	13872.4	2834.6	3249.3	3378.7	3462.4	2998.2	2473.1	2914.5	3066.7
70°	14093.1	7491.7	1989.9	2145.9	2846.0	2941.1	2762.3	2275.3	2659.6	2834.6
72.5°	10018.1	4425.0	1430.6	1502.9	2286.7	2450.3	2431.3	2054.6	2362.8	2575.9
75°	6913.4	2438.9	966.4	1073.0	1658.9	1989.9	1875.8	1765.4	2001.3	2218.2
77.5°	4333.7	1092.0	578.3	745.7	1088.2	1563.8	1286.0	1365.9	1560.0	1761.6
80°	2412.3	422.3	323.4	494.6	593.6	1137.6	711.5	878.9	1149.1	1293.6
82.5°	525.1	53.3	144.6	213.1	232.1	662.0	376.7	509.8	722.9	711.5
85°	0.0	0.0	26.6	30.4	15.2	285.4	137.0	167.4	235.9	220.7
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954522

CATALOG NUMBER: GLAN-SB7D-730-U-SLR-HSS

CANDELA DISTRIBUTION (continued):

90°		95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
7647.7	0°	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7
6879.1	2.5°	6848.7	6662.3	6525.3	6456.8	6399.7	6453.0	6483.4	6483.4	6612.8	6688.9
6338.9	5°	6205.7	5870.9	5615.9	5444.7	5342.0	5376.2	5414.3	5456.1	5619.7	5730.1
6019.3	7.5°	5760.5	5246.9	4858.8	4619.1	4493.5	4512.5	4539.2	4573.4	4733.2	4843.6
6064.9	10°	5676.8	4938.7	4390.8	4075.0	3922.8	3896.2	3880.9	3869.5	3964.6	4048.3
6582.4	12.5°	6019.3	4953.9	4189.1	3804.8	3618.4	3538.5	3447.2	3374.9	3390.1	3443.4
7366.2	15°	6631.8	5147.9	4124.4	3664.1	3432.0	3298.8	3192.3	3104.7	3085.7	3104.7
8051.0	17.5°	7331.9	5410.5	4116.8	3542.3	3253.1	3116.2	3028.7	2948.8	2922.1	2925.9
8435.3	20°	7796.1	5619.7	4094.0	3405.3	3081.9	2960.2	2884.1	2804.2	2777.5	2785.1
8328.8	22.5°	7841.8	5730.1	4059.8	3253.1	2910.7	2808.0	2731.9	2659.6	2655.8	2655.8
7929.3	25°	7594.5	5730.1	3987.5	3116.2	2747.1	2655.8	2587.3	2499.8	2515.0	2522.6
7476.5	27.5°	7210.2	5593.1	3850.5	3005.8	2606.3	2511.2	2442.7	2362.8	2381.8	2393.2
7054.2	30°	6829.7	5418.1	3686.9	2880.3	2473.1	2362.8	2313.3	2244.9	2252.5	2267.7
6635.6	32.5°	6475.8	5231.7	3492.8	2777.5	2340.0	2229.6	2191.6	2115.5	2126.9	2142.1
6224.7	35°	6125.8	5026.2	3264.6	2655.8	2218.2	2107.9	2077.4	1989.9	1997.5	2020.4
5813.8	37.5°	5749.1	4809.3	3078.1	2534.0	2100.3	1986.1	1955.7	1864.4	1872.0	1898.6
5387.7	40°	5353.4	4596.2	2895.5	2404.7	1974.7	1860.6	1833.9	1735.0	1742.6	1773.1
4969.1	42.5°	4953.9	4364.2	2754.7	2237.2	1845.3	1723.6	1697.0	1605.6	1617.1	1651.3
4603.9	45°	4584.8	4086.4	2663.4	2050.8	1723.6	1586.6	1560.0	1476.3	1499.1	1537.2
4295.7	47.5°	4269.0	3801.0	2625.3	1894.8	1594.2	1445.8	1423.0	1354.5	1392.6	1434.4
4033.1	50°	3998.9	3527.1	2575.9	1735.0	1472.5	1324.1	1301.3	1255.6	1305.1	1346.9
3854.3	52.5°	3804.8	3215.1	2469.3	1590.4	1365.9	1221.4	1213.7	1190.9	1236.6	1274.6
3721.1	55°	3637.4	2891.7	2298.1	1464.9	1270.8	1133.8	1141.5	1130.0	1168.1	1198.5
3641.2	57.5°	3485.2	2610.1	2081.2	1365.9	1168.1	1057.7	1080.6	1065.4	1084.4	1103.4
3557.5	60°	3302.6	2324.8	1822.5	1255.6	1046.3	981.6	1008.3	966.4	962.6	970.2
3405.3	62.5°	3032.5	1940.5	1552.4	1118.6	939.8	897.9	909.4	829.5	768.6	768.6
3180.8	65°	2655.8	1560.0	1301.3	966.4	818.0	783.8	776.2	662.0	578.3	570.7
2937.3	67.5°	2218.2	1282.2	1080.6	814.2	681.1	658.2	665.8	582.1	498.4	490.8
2693.8	70°	1807.3	1061.6	871.3	650.6	525.1	547.9	582.1	498.4	418.5	407.1
2408.5	72.5°	1468.7	844.7	681.1	498.4	388.1	452.8	494.6	407.1	331.0	323.4
2054.6	75°	1133.8	620.2	487.0	338.6	281.6	350.0	388.1	296.8	235.9	224.5
1590.4	77.5°	757.2	384.3	273.9	213.1	167.4	239.7	258.7	156.0	137.0	133.2
1156.7	80°	460.4	178.8	118.0	102.7	57.1	87.5	102.7	64.7	72.3	76.1
616.4	82.5°	232.1	49.5	19.0	3.8	0.0	0.0	30.4	15.2	30.4	38.0
167.4	85°	19.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.6	19.0
0.0	87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954522

CATALOG NUMBER: GLAN-SB7D-730-U-SLR-HSS

CANDELA DISTRIBUTION (continued):

185°		195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
7647.7	0°	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7
6719.3	2.5°	6932.4	7092.2	7244.4	7487.9	7739.0	7986.4	8237.5	8481.0	8568.5	8633.2
5802.4	5°	6133.4	6434.0	6784.0	7267.2	7784.7	8317.4	8857.7	9352.3	9576.8	9729.0
4938.7	7.5°	5307.8	5699.6	6201.9	6928.6	7739.0	8587.5	9436.0	10216.0	10577.5	10870.4
4124.4	10°	4489.7	4915.9	5551.3	6380.7	7476.5	8694.1	9865.9	10938.9	11406.9	11776.0
3538.5	12.5°	3770.6	4170.1	4836.0	5752.9	7065.6	8610.4	10113.3	11403.1	11954.8	12369.5
3120.0	15°	3264.6	3546.1	4135.9	5125.1	6578.6	8340.2	10128.5	11623.8	12228.8	12662.5
2944.9	17.5°	2983.0	3078.1	3462.4	4485.9	6038.3	7986.4	9987.7	11699.9	12346.7	12750.0
2788.9	20°	2830.8	2846.0	2952.6	3656.5	5345.8	7655.3	9854.5	11776.0	12457.0	12795.7
2678.6	22.5°	2709.0	2709.0	2735.7	2990.6	4451.7	7259.6	9812.7	11909.1	12609.2	12818.5
2553.0	25°	2598.7	2598.7	2606.3	2674.8	3527.1	6654.7	9786.0	12114.6	12818.5	12875.6
2427.5	27.5°	2484.6	2488.4	2488.4	2526.4	2842.2	5832.8	9671.9	12380.9	13069.6	12951.7
2305.7	30°	2370.4	2378.0	2378.0	2404.7	2515.0	4870.2	9447.4	12700.6	13396.8	13050.6
2184.0	32.5°	2256.3	2263.9	2263.9	2286.7	2366.6	3888.5	9165.9	12993.5	13727.9	13092.5
2066.0	35°	2138.3	2149.7	2142.1	2172.6	2256.3	3093.3	8808.2	13286.5	14085.5	13225.6
1951.9	37.5°	2020.4	2028.0	2024.2	2054.6	2149.7	2671.0	8393.5	13507.2	14572.5	13522.4
1830.1	40°	1902.4	1898.6	1898.6	1932.9	2035.6	2549.2	7872.2	13857.2	15272.6	14043.7
1708.4	42.5°	1780.7	1780.7	1773.1	1811.1	1936.7	2457.9	7373.8	14485.0	16292.3	14873.1
1594.2	45°	1670.3	1666.5	1651.3	1685.5	1841.5	2298.1	7198.8	15656.9	17799.0	16216.2
1480.1	47.5°	1563.8	1560.0	1521.9	1552.4	1727.4	2153.5	7853.2	17574.6	19887.9	18190.9
1388.8	50°	1468.7	1472.5	1400.2	1426.8	1613.3	2043.2	9272.4	20062.9	22661.6	20850.5
1312.7	52.5°	1381.2	1381.2	1286.0	1301.3	1472.5	1944.3	10623.1	22760.5	26321.9	24560.2
1232.8	55°	1293.6	1286.0	1179.5	1187.1	1331.7	1803.5	10824.8	25393.5	31313.8	30141.9
1145.3	57.5°	1194.7	1179.5	1080.6	1080.6	1202.3	1700.8	9382.7	27417.7	37508.1	38345.2
981.6	60°	1073.0	1061.6	996.9	977.8	1099.6	1792.1	6620.4	27653.6	41503.2	49253.6
780.0	62.5°	917.0	932.2	897.9	871.3	1000.7	1860.6	3922.8	25755.0	40536.8	52723.7
605.0	65°	722.9	783.8	776.2	757.2	1099.6	1567.6	2317.1	22109.9	37572.8	49923.3
528.9	67.5°	616.4	658.2	646.8	646.8	1152.9	1190.9	1457.3	17274.0	33494.0	46601.7
441.4	70°	525.1	566.9	525.1	525.1	871.3	722.9	1008.3	12061.3	29091.8	42926.2
353.9	72.5°	433.8	475.6	429.9	399.5	696.3	540.3	738.1	7537.4	24914.1	39098.5
251.1	75°	331.0	380.5	346.2	308.2	460.4	403.3	559.3	4379.4	20641.3	33452.1
152.2	77.5°	209.3	273.9	258.7	216.9	338.6	293.0	403.3	2606.3	15927.1	26139.2
91.3	80°	129.4	140.8	144.6	137.0	194.0	197.9	273.9	1483.9	10900.9	18217.6
57.1	82.5°	83.7	83.7	64.7	72.3	95.1	114.1	156.0	559.3	6407.3	11091.1
34.2	85°	60.9	53.3	34.2	34.2	45.7	57.1	60.9	171.2	2598.7	4379.4
15.2	87.5°	30.4	26.6	11.4	15.2	22.8	19.0	15.2	7.6	654.4	1400.2
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P954522

CATALOG NUMBER: GLAN-SB7D-730-U-SLR-HSS

CANDELA DISTRIBUTION (continued):

285°		295°	305°	315°	325°	335°	345°	355°	360°
7647.7	0°	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7	7647.7
8777.8	2.5°	8853.9	8971.8	8979.4	8979.4	8876.7	8872.9	8663.6	8640.8
10071.4	5°	10425.3	10501.4	10520.4	10482.3	10276.9	10124.7	9717.6	9630.0
11391.7	7.5°	11863.5	12015.7	12015.7	11924.4	11589.5	11277.5	10687.8	10467.1
12483.7	10°	13012.5	13187.6	13149.5	12963.1	12540.7	12110.8	11395.5	11106.3
13145.7	12.5°	13571.9	13750.7	13651.8	13438.7	13027.8	12575.0	11821.6	11494.4
13336.0	15°	13560.4	13511.0	13408.3	13381.6	13183.8	12841.3	12137.4	11779.8
13218.0	17.5°	13077.2	12658.7	12578.8	12845.1	13096.3	13012.5	12411.4	12076.6
12936.5	20°	12312.5	11581.9	11509.6	12019.5	12734.8	13100.1	12666.3	12358.1
12529.3	22.5°	11505.8	10718.2	10550.8	11113.9	12190.7	13126.7	12989.7	12681.5
12080.4	25°	10741.1	9949.7	9782.2	10307.3	11585.7	13081.0	13339.8	13077.2
11650.4	27.5°	10101.8	9337.1	9181.1	9706.1	11003.6	12951.7	13689.8	13503.4
11224.3	30°	9607.2	8899.5	8785.4	9291.4	10501.4	12791.9	14135.0	14032.2
10828.6	32.5°	9318.1	8800.6	8842.4	9257.2	10231.2	12616.8	14561.1	14610.6
10634.5	35°	9603.4	9626.2	9991.5	10162.7	10482.3	12590.2	15139.5	15333.5
10866.6	37.5°	11022.6	11814.0	12571.2	12430.4	11711.3	12898.4	16003.2	16364.6
11878.7	40°	13438.7	15063.4	16292.3	15755.8	13944.7	13842.0	17247.3	17787.6
13674.6	42.5°	16391.2	19145.9	21170.1	19731.9	16825.0	15493.3	19024.2	19712.9
15847.2	45°	19507.4	24179.8	27368.2	24377.6	19895.5	17806.6	21714.2	22254.5
17882.7	47.5°	22791.0	30297.9	34422.4	29529.4	22741.5	20439.6	25382.1	25507.6
19811.8	50°	26382.8	37005.9	41613.5	34677.3	25488.6	23456.8	29864.2	29719.6
22060.5	52.5°	29803.3	43904.0	48652.5	39848.1	27900.9	27200.8	35065.4	34768.6
25134.8	55°	33067.9	50798.4	55733.3	44817.2	30176.2	32147.1	41244.5	39448.6
29567.4	57.5°	36853.7	56996.5	63031.0	49809.1	33357.0	38569.7	48154.0	42165.2
38056.0	60°	42450.6	64039.2	71283.7	56650.2	39406.7	45319.4	50631.0	41647.8
48222.5	62.5°	49596.1	70515.1	77283.9	63354.4	45483.0	46590.3	46982.2	37660.3
46148.9	65°	50984.8	72155.0	77622.5	65146.5	44699.2	39520.9	38356.6	30271.3
41221.6	67.5°	47301.8	69191.0	72889.3	61809.6	39539.9	30541.4	28783.6	21961.5
37987.5	70°	43169.7	63540.8	64640.4	56136.6	34776.2	22463.8	19438.9	14093.1
35773.1	72.5°	38934.9	56003.4	53728.1	48751.4	30564.3	16357.0	14020.8	10018.1
32618.9	75°	33904.9	46091.8	42321.2	40506.3	25306.0	12837.5	10143.7	6913.4
28056.9	77.5°	27151.3	32443.9	31435.6	31397.5	19016.6	9378.9	6768.8	4333.7
21919.7	80°	19153.6	21056.0	20542.3	23647.1	12757.6	6803.1	4075.0	2412.3
15257.4	82.5°	9272.4	11642.8	11951.0	14081.7	6205.7	4002.7	939.8	525.1
5966.0	85°	3629.8	5615.9	4737.0	5345.8	1742.6	1114.8	22.8	0.0
981.6	87.5°	407.1	650.6	597.4	471.8	213.1	45.7	0.0	0.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)