

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P951790

Luminaire Tested: **GLAN-SB5D-830-U-SLL-HSS**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P951790
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SB5D-830-U-SLL-HSS
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(5) 80 CRI, 3000K, 900mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR LEFT OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 35251 lumens
Efficiency: N/A
Efficacy: 96.6 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B3 - U0 - G5


Input Watts (W): 364.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P951790
CATALOG NUMBER: GLAN-SB5D-830-U-SLL-HSS

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
- - - 1/2 Max cd

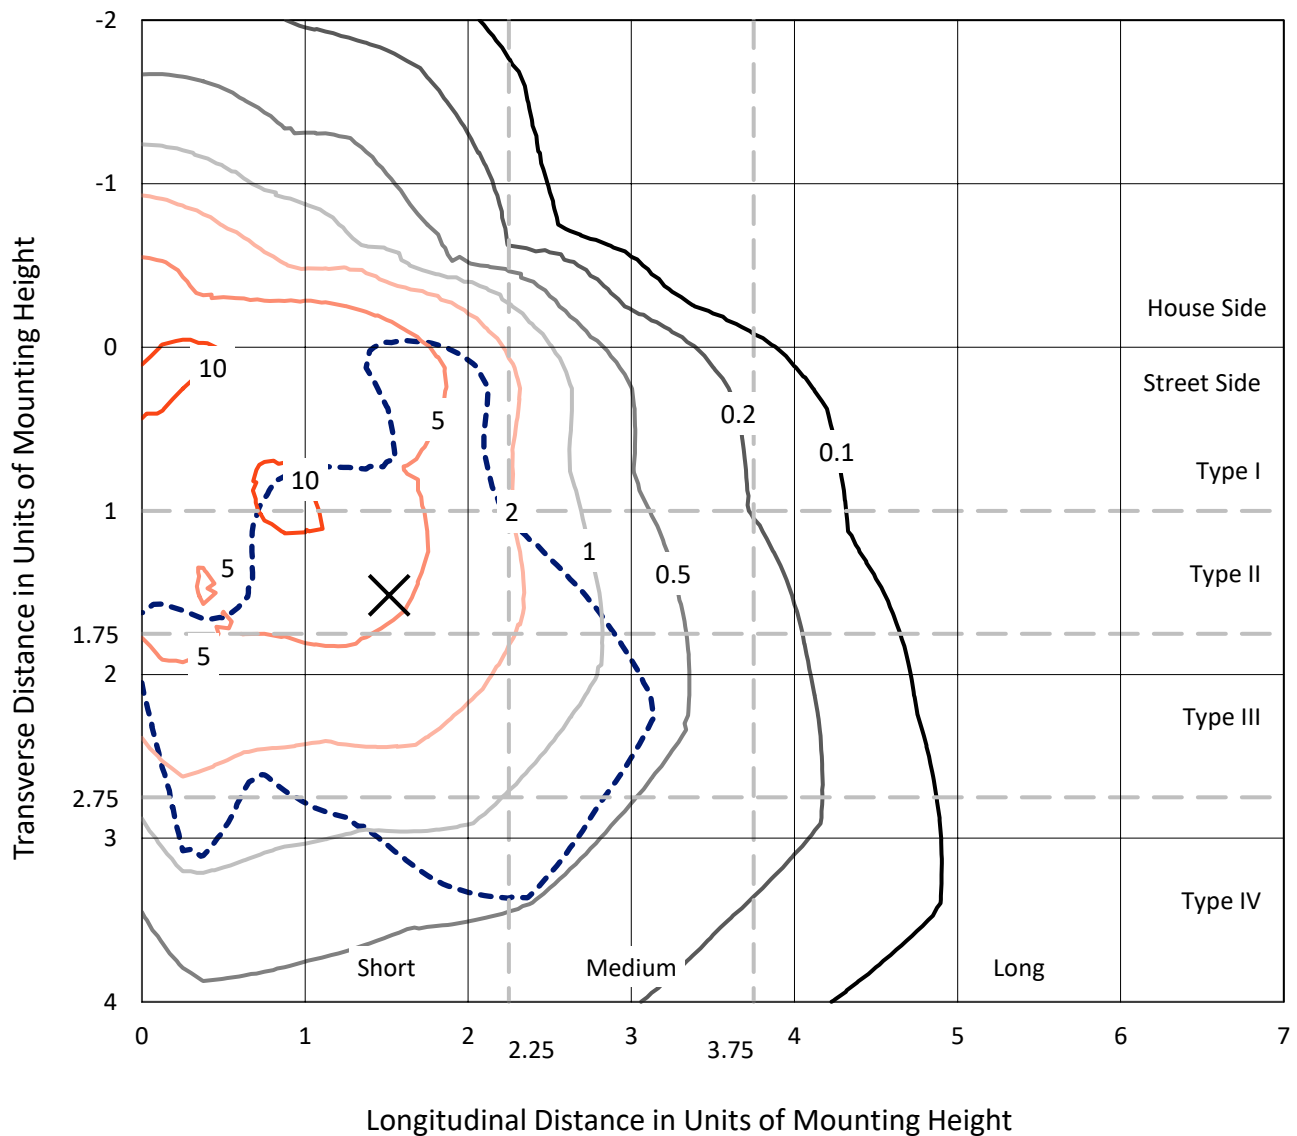

Based on 25 foot mounting height. Maximum calculated value = 12.8 fc
Type IV - Short - N/A

REPORT NUMBER: P951790
CATALOG NUMBER: GLAN-SB5D-830-U-SLL-HSS

Luminous Intensity Polar Plot

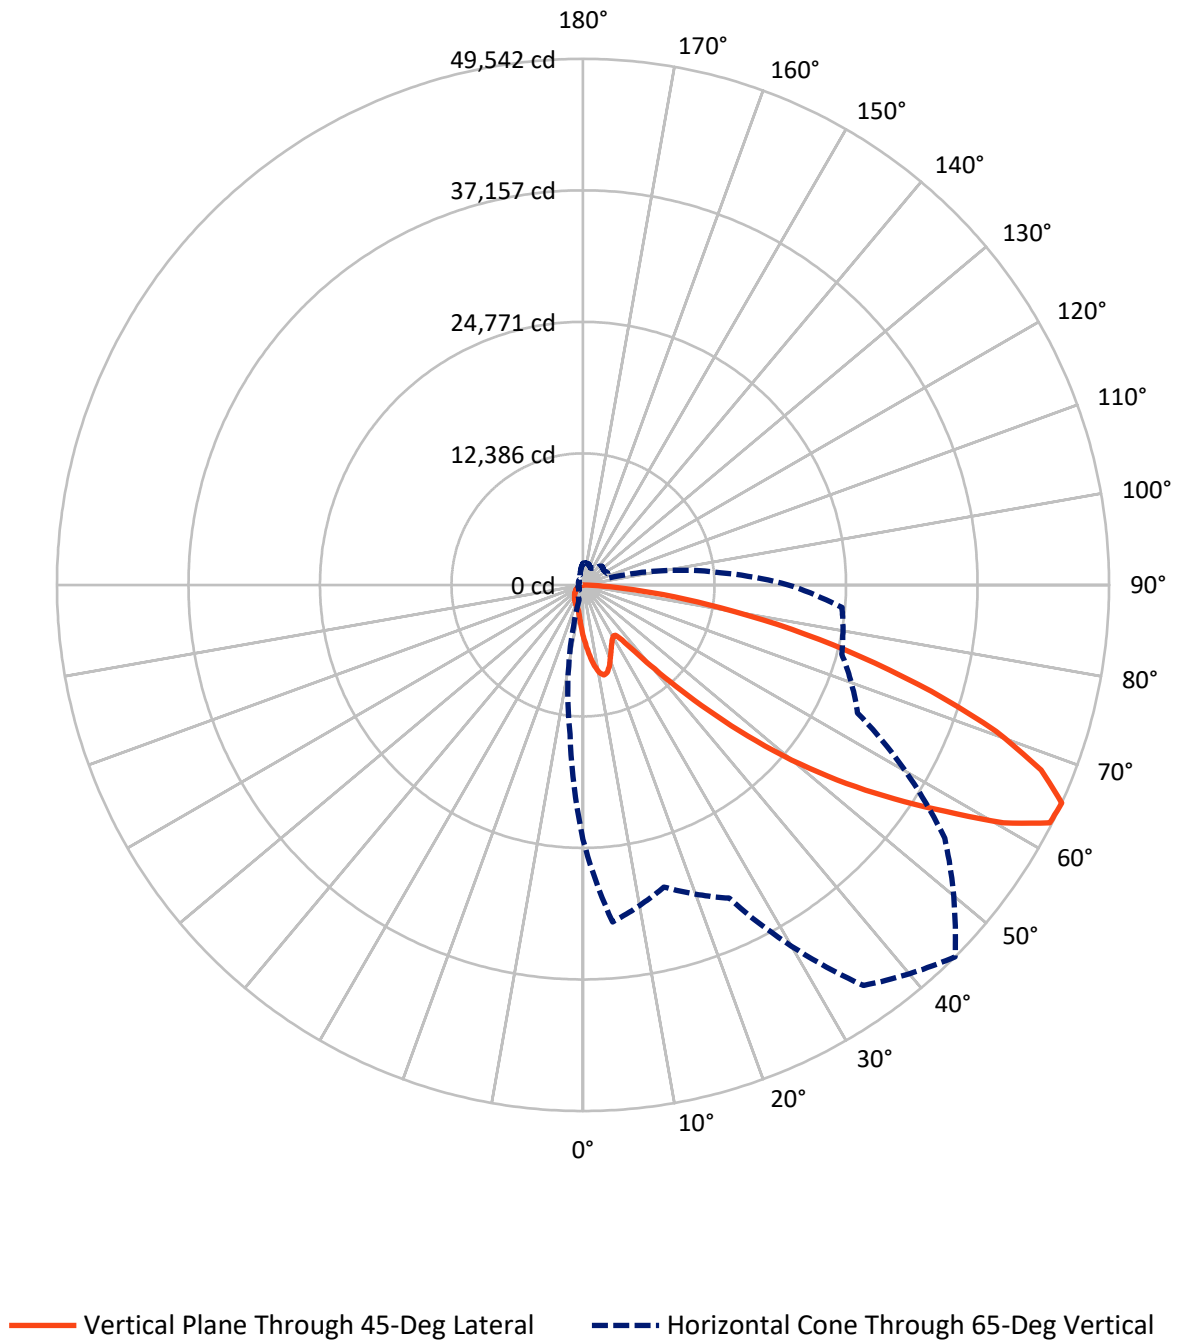

REPORT NUMBER: P951790

CATALOG NUMBER: GLAN-SB5D-830-U-SLL-HSS

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	7006.8	0.0	7006.8
	% Fixture	19.9	0.0	19.9
Street Side	Lumens	28244.2	0.0	28244.2
	% Fixture	80.1	0.0	80.1
Total	Lumens	35251.0	0.0	35251.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	480.6	1.4
10°-20°	1440.6	4.1
20°-30°	2122.3	6.0
30°-40°	2726.6	7.7
40°-50°	4409.7	12.5
50°-60°	7732.7	21.9
60°-70°	9675.8	27.4
70°-80°	5654.1	16.0
80°-90°	1008.8	2.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	35251.0	100.0
0°-180°	35251.0	100.0

Coefficient of Utilization



REPORT NUMBER: P951790


CATALOG NUMBER: GLAN-SB5D-830-U-SLL-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	2358.7	6.7			
FM	(30°-60°)	11062.2	31.4			
FH	(60°-80°)	13861.8	39.3			G5
FVH	(80°-90°)	961.5	2.7			G5
BL	(0°-30°)	1684.7	4.8	B3/2500		
BM	(30°-60°)	3806.8	10.8	B3/5000		
BH	(60°-80°)	1468.1	4.2	B3/2500		G3/2500
BVH	(80°-90°)	47.3	0.1			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G5

Type IV Short

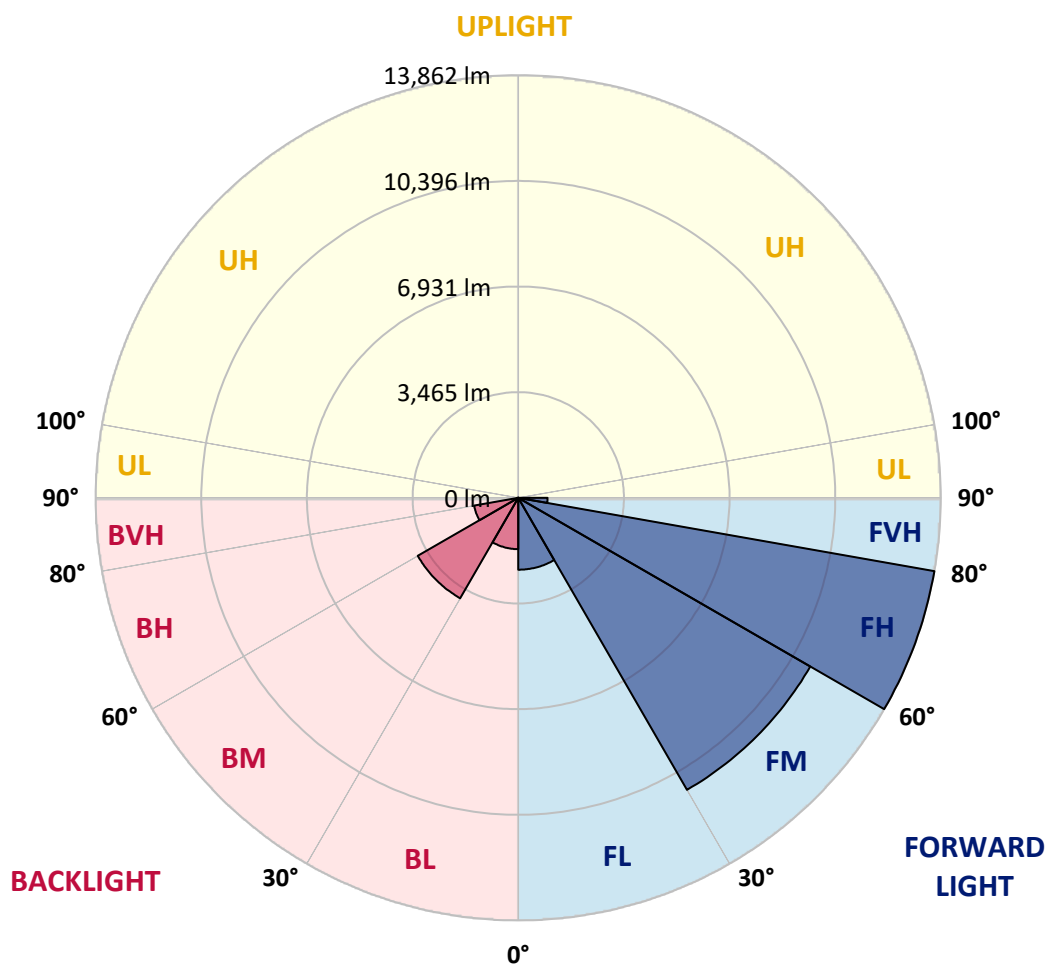

REPORT NUMBER: P951790

CATALOG NUMBER: GLAN-SB5D-830-U-SLL-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1
2.5°	5468.8	5510.1	5602.4	5650.9	5726.2	5731.1	5731.1	5665.5	5663.1	5529.5
5°	6112.3	6209.5	6428.0	6653.9	6702.5	6714.6	6690.3	6559.2	6462.0	6202.2
7.5°	6751.0	6938.0	7270.7	7571.8	7669.0	7669.0	7610.7	7397.0	7197.9	6821.4
10°	7280.4	7516.0	7967.7	8305.2	8416.9	8392.6	8273.6	8004.1	7729.7	7273.1
12.5°	7630.1	7894.8	8390.2	8662.2	8776.3	8713.2	8577.2	8314.9	8025.9	7545.1
15°	7805.0	8081.8	8511.6	8654.9	8623.3	8557.8	8540.8	8414.5	8195.9	7746.7
17.5°	7880.2	8137.7	8436.4	8346.5	8079.4	8028.4	8198.4	8358.6	8305.2	7921.5
20°	7950.7	8166.8	8256.6	7858.4	7392.1	7346.0	7671.4	8127.9	8361.1	8084.2
22.5°	8047.8	8181.4	7996.8	7343.6	6840.9	6734.0	7093.4	7780.7	8378.1	8290.6
25°	8181.4	8217.8	7710.3	6855.4	6350.3	6243.5	6578.6	7394.6	8348.9	8514.1
27.5°	8341.6	8266.4	7435.8	6447.5	5959.4	5859.8	6194.9	7023.0	8266.4	8737.5
30°	8550.5	8329.5	7163.9	6131.8	5680.1	5607.2	5930.2	6702.5	8164.4	9021.6
32.5°	8761.8	8356.2	6911.3	5947.2	5616.9	5643.7	5908.4	6530.0	8052.7	9293.6
35°	8990.0	8441.2	6787.4	6129.3	6143.9	6377.0	6486.3	6690.3	8035.7	9662.7
37.5°	9300.9	8630.6	6935.6	7035.1	7540.3	8023.5	7933.7	7474.7	8232.4	10214.0
40°	9747.7	8963.3	7581.5	8577.2	9614.1	10398.5	10056.1	8900.2	8834.6	11008.1
42.5°	10398.5	9492.7	8727.8	10461.7	12219.8	13511.8	12593.8	10738.5	9888.5	12142.1
45°	11360.2	10350.0	10114.4	12450.5	15432.6	17467.7	15558.9	12698.2	11365.0	13859.0
47.5°	12693.4	11610.3	11413.6	14546.3	19337.6	21970.0	18847.0	14514.7	13045.5	16200.0
50°	14463.7	13307.8	12644.8	16838.7	23618.9	26559.7	22132.7	16268.0	14971.2	19060.7
52.5°	16799.8	15675.5	14080.0	19021.9	28021.6	31052.3	25432.9	17807.6	17360.8	22380.4
55°	19985.9	19238.0	16042.2	21105.4	32421.9	35571.6	28604.4	19259.8	20517.8	26324.1
57.5°	23939.4	24473.7	18871.3	23521.7	36377.8	40229.3	31790.5	21290.0	24617.0	30734.2
60°	26489.3	31436.0	24289.1	27093.9	40872.8	45496.6	36156.8	25151.2	28925.0	32315.1
62.5°	25872.4	33650.7	30777.9	31654.5	45006.0	49326.2	40435.7	29029.4	29736.1	29986.2
65°	23980.7	31863.4	29454.4	32540.9	46052.7	49542.3	41579.5	28529.1	25224.1	24481.0
67.5°	21377.4	29743.4	26309.6	30190.2	44160.9	46521.4	39449.8	25236.2	19493.0	18371.0
70°	18567.7	27397.5	24245.4	27552.9	40554.7	41256.5	35829.0	22195.8	14337.4	12406.8
72.5°	15901.3	24954.5	22832.1	24850.1	35744.0	34291.8	31115.4	19507.5	10439.8	8948.7
75°	13174.2	21350.7	20818.9	21639.7	29417.9	27011.4	25853.0	16151.5	8193.5	6474.2
77.5°	10165.4	16683.3	17907.2	17329.2	20707.2	20063.7	20039.4	12137.3	5986.1	4320.2
80°	6957.4	11627.3	13990.2	12224.7	13438.9	13111.1	15092.7	8142.5	4342.0	2600.8
82.5°	4089.5	7078.9	9738.0	5918.1	7431.0	7627.7	8987.6	3960.8	2554.7	599.8
85°	1658.6	2795.1	3807.8	2316.7	3584.4	3023.4	3411.9	1112.2	711.5	14.6
87.5°	417.7	893.7	626.5	259.8	415.3	381.3	301.1	136.0	29.1	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P951790

CATALOG NUMBER: GLAN-SB5D-830-U-SLL-HSS

CANDELA DISTRIBUTION (continued):

90°		95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
4881.1	0°	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1
5515.0	2.5°	5420.2	5364.4	5226.0	5087.6	4975.8	4825.3	4725.7	4606.7	4492.6	4390.6
6146.3	5°	5993.4	5808.8	5556.2	5325.5	5090.0	4861.7	4635.9	4397.9	4179.3	4045.8
6680.6	7.5°	6459.6	6134.2	5799.1	5505.2	5221.1	4954.0	4655.3	4366.3	4023.9	3841.8
7088.6	10°	6806.9	6379.5	5939.9	5602.4	5315.8	5056.0	4803.4	4512.0	4099.2	3870.9
7336.3	12.5°	7035.1	6527.6	6012.8	5626.7	5306.1	5104.6	4992.8	4878.7	4468.3	4201.2
7518.4	15°	7193.0	6632.0	6063.8	5570.8	5177.4	5029.3	5141.0	5272.1	5009.8	4701.4
7707.8	17.5°	7365.4	6768.0	6085.6	5420.2	4927.3	4864.1	5153.1	5456.7	5444.5	5138.5
7887.5	20°	7547.5	6887.0	6071.1	5177.4	4623.7	4679.6	5048.7	5400.8	5549.0	5383.8
8093.9	22.5°	7734.5	7001.2	6015.2	4861.7	4339.6	4514.4	4883.6	5192.0	5366.8	5315.8
8346.5	25°	7970.1	7161.4	5932.6	4521.7	4104.0	4346.9	4691.7	4941.8	5063.3	5060.8
8618.5	27.5°	8251.8	7375.1	5888.9	4247.3	3936.5	4157.5	4463.4	4686.9	4771.9	4771.9
8956.0	30°	8579.6	7627.7	5840.4	4067.6	3839.3	3960.8	4198.7	4417.3	4502.3	4502.3
9325.2	32.5°	8943.9	7870.5	5723.8	3958.3	3766.5	3768.9	3919.5	4118.6	4220.6	4235.2
9786.6	35°	9381.0	8130.4	5468.8	3870.9	3681.5	3581.9	3654.8	3819.9	3941.3	3972.9
10444.7	37.5°	9954.1	8448.5	5104.6	3742.2	3550.4	3385.2	3402.2	3528.5	3662.1	3710.6
11352.9	40°	10723.9	8822.5	4725.7	3557.6	3365.8	3169.1	3161.8	3254.1	3385.2	3438.7
12581.7	42.5°	11741.4	9271.7	4363.9	3380.4	3142.4	2940.8	2928.7	3001.5	3115.7	3171.5
14203.9	45°	13043.1	9823.0	4053.0	3241.9	2923.8	2724.7	2719.8	2780.5	2880.1	2938.4
16280.2	47.5°	14852.3	10374.2	3841.8	3169.1	2751.4	2547.4	2557.1	2610.6	2700.4	2741.7
18968.4	50°	17210.3	10541.8	3734.9	3169.1	2659.1	2389.6	2438.1	2481.9	2549.8	2574.1
22191.0	52.5°	19473.5	9988.1	3637.8	3188.5	2671.3	2256.0	2360.4	2392.0	2450.3	2460.0
25177.9	55°	20583.3	8586.9	3504.2	3193.4	2746.5	2141.9	2297.3	2355.6	2377.4	2375.0
26911.8	57.5°	20202.1	6942.9	3278.4	3174.0	2797.5	2069.0	2219.6	2331.3	2345.9	2324.0
26581.5	60°	18864.0	5111.8	3106.0	3030.7	2778.1	2047.2	2100.6	2277.9	2299.7	2270.6
24036.6	62.5°	16620.1	3547.9	2972.4	2715.0	2693.1	2039.9	1913.6	2161.3	2214.7	2173.4
19320.6	65°	13084.4	2506.1	2559.6	2379.9	2508.6	2001.0	1719.3	2020.5	2093.3	2030.2
14016.9	67.5°	8854.0	1809.2	2073.9	2156.4	2209.9	1913.6	1578.5	1860.2	1957.3	1874.7
8994.9	70°	4781.6	1270.1	1369.6	1816.5	1877.2	1763.0	1452.2	1697.5	1809.2	1719.3
6394.0	72.5°	2824.3	913.1	959.2	1459.5	1563.9	1551.8	1311.3	1508.1	1644.0	1537.2
4412.4	75°	1556.6	616.8	684.8	1058.8	1270.1	1197.2	1126.8	1277.4	1415.8	1311.3
2766.0	77.5°	697.0	369.1	476.0	694.5	998.1	820.8	871.8	995.7	1124.4	1015.1
1539.6	80°	269.6	206.4	315.7	378.8	726.1	454.1	561.0	733.4	825.7	738.2
335.1	82.5°	34.0	92.3	136.0	148.1	422.5	240.4	325.4	461.4	454.1	393.4
0.0	85°	0.0	17.0	19.4	9.7	182.1	87.4	106.9	150.6	140.8	106.9
0.0	87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.9	0.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P951790

CATALOG NUMBER: GLAN-SB5D-830-U-SLL-HSS

CANDELA DISTRIBUTION (continued):

185°		195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
4881.1	0°	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1
4371.2	2.5°	4252.2	4164.7	4121.0	4084.6	4118.6	4138.0	4138.0	4220.6	4269.2	4288.6
3960.8	5°	3747.1	3584.4	3475.1	3409.5	3431.4	3455.6	3482.4	3586.8	3657.2	3703.3
3676.6	7.5°	3348.8	3101.1	2948.1	2868.0	2880.1	2897.1	2919.0	3021.0	3091.4	3152.1
3623.2	10°	3152.1	2802.4	2600.8	2503.7	2486.7	2477.0	2469.7	2530.4	2583.8	2632.4
3841.8	12.5°	3161.8	2673.7	2428.4	2309.4	2258.4	2200.2	2154.0	2163.7	2197.7	2258.4
4232.7	15°	3285.7	2632.4	2338.6	2190.4	2105.4	2037.4	1981.6	1969.5	1981.6	1991.3
4679.6	17.5°	3453.2	2627.6	2260.9	2076.3	1988.9	1933.0	1882.0	1865.0	1867.5	1879.6
4975.8	20°	3586.8	2613.0	2173.4	1967.0	1889.3	1840.7	1789.7	1772.8	1777.6	1780.0
5005.0	22.5°	3657.2	2591.1	2076.3	1857.7	1792.2	1743.6	1697.5	1695.0	1695.0	1709.6
4847.1	25°	3657.2	2545.0	1988.9	1753.3	1695.0	1651.3	1595.5	1605.2	1610.0	1629.5
4601.9	27.5°	3569.8	2457.6	1918.5	1663.5	1602.8	1559.0	1508.1	1520.2	1527.5	1549.3
4359.0	30°	3458.1	2353.1	1838.3	1578.5	1508.1	1476.5	1432.8	1437.6	1447.3	1471.6
4133.2	32.5°	3339.1	2229.3	1772.8	1493.5	1423.1	1398.8	1350.2	1357.5	1367.2	1393.9
3909.8	35°	3208.0	2083.6	1695.0	1415.8	1345.3	1325.9	1270.1	1274.9	1289.5	1318.6
3669.4	37.5°	3069.5	1964.6	1617.3	1340.5	1267.6	1248.2	1189.9	1194.8	1211.8	1245.8
3416.8	40°	2933.5	1848.0	1534.8	1260.4	1187.5	1170.5	1107.4	1112.2	1131.6	1168.1
3161.8	42.5°	2785.4	1758.2	1427.9	1177.8	1100.1	1083.1	1024.8	1032.1	1053.9	1090.4
2926.3	45°	2608.1	1699.9	1308.9	1100.1	1012.7	995.7	942.2	956.8	981.1	1017.5
2724.7	47.5°	2426.0	1675.6	1209.4	1017.5	922.8	908.2	864.5	888.8	915.5	944.7
2552.3	50°	2251.2	1644.0	1107.4	939.8	845.1	830.5	801.4	832.9	859.7	886.4
2428.4	52.5°	2052.0	1576.0	1015.1	871.8	779.5	774.7	760.1	789.2	813.5	837.8
2321.6	55°	1845.6	1466.8	934.9	811.1	723.7	728.5	721.2	745.5	765.0	786.8
2224.4	57.5°	1665.9	1328.3	871.8	745.5	675.1	689.7	680.0	692.1	704.2	731.0
2107.9	60°	1483.8	1163.2	801.4	667.8	626.5	643.5	616.8	614.4	619.2	626.5
1935.5	62.5°	1238.5	990.8	714.0	599.8	573.1	580.4	529.4	490.5	490.5	497.8
1695.0	65°	995.7	830.5	616.8	522.1	500.3	495.4	422.5	369.1	364.3	386.1
1415.8	67.5°	818.4	689.7	519.7	434.7	420.1	425.0	371.5	318.1	313.3	337.6
1153.5	70°	677.5	556.1	415.3	335.1	349.7	371.5	318.1	267.1	259.8	281.7
937.4	72.5°	539.1	434.7	318.1	247.7	289.0	315.7	259.8	211.3	206.4	225.8
723.7	75°	395.8	310.8	216.1	179.7	223.4	247.7	189.4	150.6	143.3	160.3
483.3	77.5°	245.3	174.8	136.0	106.9	153.0	165.1	99.6	87.4	85.0	97.1
293.8	80°	114.1	75.3	65.6	36.4	55.9	65.6	41.3	46.1	48.6	58.3
148.1	82.5°	31.6	12.1	2.4	0.0	0.0	19.4	9.7	19.4	24.3	36.4
12.1	85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	4.9	12.1	21.9
0.0	87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9.7
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P951790

CATALOG NUMBER: GLAN-SB5D-830-U-SLL-HSS

CANDELA DISTRIBUTION (continued):

285°		295°	305°	315°	325°	335°	345°	355°	360°
4881.1	0°	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1	4881.1
4424.6	2.5°	4526.6	4623.7	4779.1	4939.4	5097.3	5257.5	5413.0	5468.8
3914.6	5°	4106.5	4329.9	4638.3	4968.6	5308.5	5653.4	5969.1	6112.3
3387.7	7.5°	3637.8	3958.3	4422.2	4939.4	5481.0	6022.5	6520.3	6751.0
2865.5	10°	3137.5	3543.1	4072.5	4771.9	5549.0	6296.9	6981.7	7280.4
2406.6	12.5°	2661.6	3086.5	3671.8	4509.6	5495.5	6454.8	7278.0	7630.1
2083.6	15°	2263.3	2639.7	3271.1	4198.7	5323.1	6464.5	7418.8	7805.0
1903.9	17.5°	1964.6	2209.9	2863.1	3853.9	5097.3	6374.6	7467.4	7880.2
1806.7	20°	1816.5	1884.5	2333.7	3411.9	4886.0	6289.6	7516.0	7950.7
1729.0	22.5°	1729.0	1746.0	1908.7	2841.3	4633.4	6262.9	7601.0	8047.8
1658.6	25°	1658.6	1663.5	1707.2	2251.2	4247.3	6245.9	7732.1	8181.4
1585.8	27.5°	1588.2	1588.2	1612.5	1814.0	3722.8	6173.1	7902.1	8341.6
1512.9	30°	1517.8	1517.8	1534.8	1605.2	3108.4	6029.8	8106.1	8550.5
1440.1	32.5°	1444.9	1444.9	1459.5	1510.5	2481.9	5850.1	8293.1	8761.8
1364.8	35°	1372.1	1367.2	1386.6	1440.1	1974.3	5621.8	8480.1	8990.0
1289.5	37.5°	1294.4	1291.9	1311.3	1372.1	1704.8	5357.1	8620.9	9300.9
1214.2	40°	1211.8	1211.8	1233.6	1299.2	1627.0	5024.4	8844.3	9747.7
1136.5	42.5°	1136.5	1131.6	1155.9	1236.1	1568.8	4706.3	9245.0	10398.5
1066.1	45°	1063.7	1053.9	1075.8	1175.4	1466.8	4594.6	9993.0	11360.2
998.1	47.5°	995.7	971.4	990.8	1102.5	1374.5	5012.3	11216.9	12693.4
937.4	50°	939.8	893.7	910.7	1029.7	1304.1	5918.1	12805.1	14463.7
881.5	52.5°	881.5	820.8	830.5	939.8	1240.9	6780.2	14526.8	16799.8
825.7	55°	820.8	752.8	757.7	849.9	1151.1	6908.9	16207.3	19985.9
762.5	57.5°	752.8	689.7	689.7	767.4	1085.5	5988.5	17499.2	23939.4
684.8	60°	677.5	636.2	624.1	701.8	1143.8	4225.5	17649.8	26489.3
585.3	62.5°	595.0	573.1	556.1	638.7	1187.5	2503.7	16438.0	25872.4
461.4	65°	500.3	495.4	483.3	701.8	1000.5	1478.9	14111.6	23980.7
393.4	67.5°	420.1	412.8	412.8	735.8	760.1	930.1	11025.1	21377.4
335.1	70°	361.8	335.1	335.1	556.1	461.4	643.5	7698.1	18567.7
276.8	72.5°	303.6	274.4	255.0	444.4	344.8	471.1	4810.7	15901.3
211.3	75°	242.8	221.0	196.7	293.8	257.4	357.0	2795.1	13174.2
133.6	77.5°	174.8	165.1	138.4	216.1	187.0	257.4	1663.5	10165.4
82.6	80°	89.9	92.3	87.4	123.8	126.3	174.8	947.1	6957.4
53.4	82.5°	53.4	41.3	46.1	60.7	72.9	99.6	357.0	4089.5
38.9	85°	34.0	21.9	21.9	29.1	36.4	38.9	109.3	1658.6
19.4	87.5°	17.0	7.3	9.7	14.6	12.1	9.7	4.9	417.7
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)