

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P525456

Luminaire Tested: **IFLD-L-SA7A-927-U-44**

Issue Date: 05/27/2021



Test Information

Test Method: LM-79-08
Report Number: P525456
Test Lab: INNOVATION CENTER(G2)
Issue Date: 05/27/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: IFLD-L-SA7A-927-U-44
Description: Infrastructure Flood – Middle Tier Light Square Luminaire w/ 44 distribution lens
Light Source: (112) 2700K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 20371.1 lumens
Efficiency: N/A
Efficacy: 93.6 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G1

Input Watts (W): 217.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT


REPORT NUMBER: P525456

CATALOG NUMBER: IFLD-L-SA7A-927-U-44

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

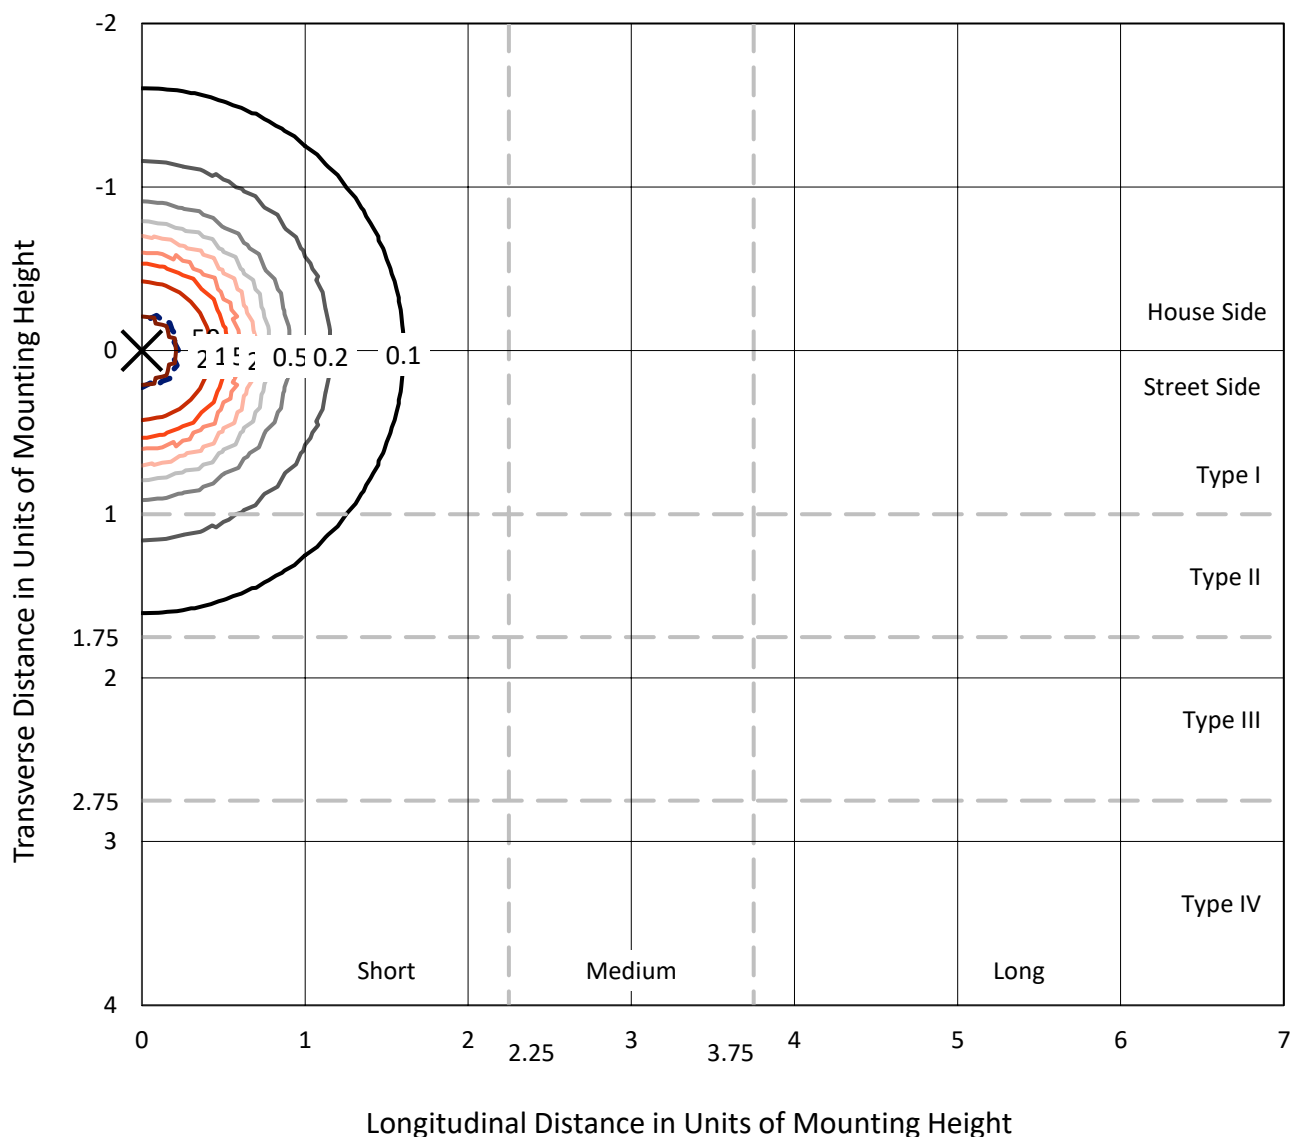


Based on 25 foot mounting height. Maximum calculated value = 97.7 fc

Type V - Short - N/A

REPORT NUMBER: P525456
CATALOG NUMBER: IFLD-L-SA7A-927-U-44

Luminous Intensity Polar Plot

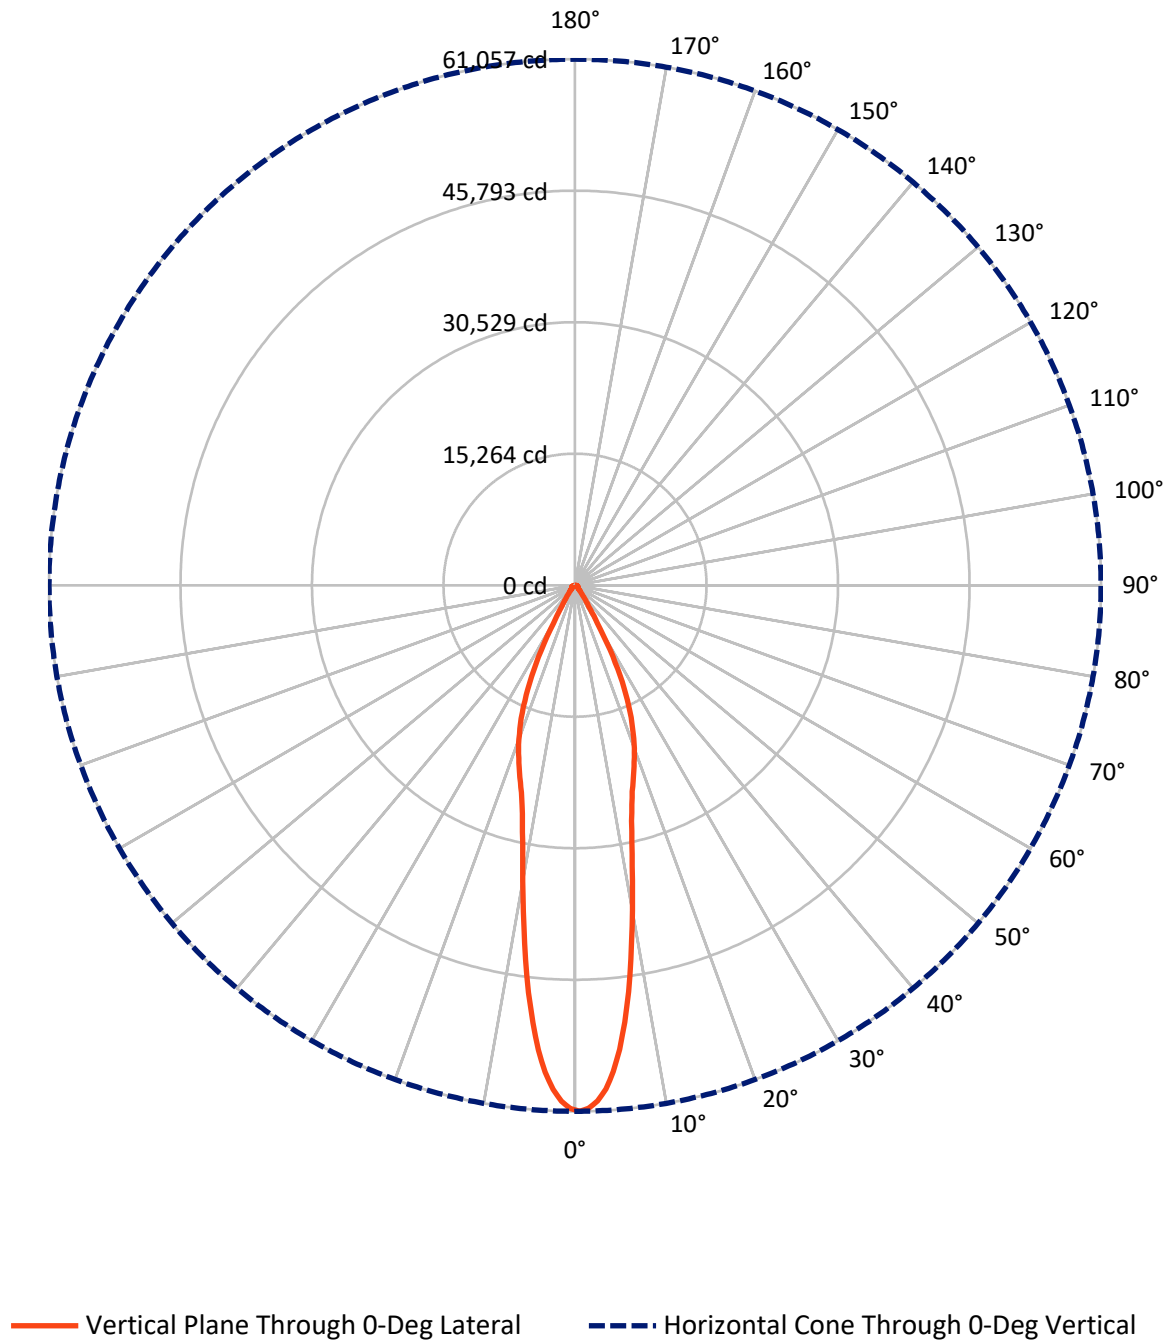

REPORT NUMBER: P525456

CATALOG NUMBER: IFLD-L-SA7A-927-U-44

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	10185.6	0.0	10185.6
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	10185.6	0.0	10185.6
	% Fixture	50.0	0.0	50.0
Total	Lumens	20371.1	0.0	20371.1
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	4570.6	22.4
10°-20°	7128.1	35.0
20°-30°	5776.1	28.4
30°-40°	1401.9	6.9
40°-50°	471.8	2.3
50°-60°	372.8	1.8
60°-70°	371.9	1.8
70°-80°	205.2	1.0
80°-90°	72.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	20371.1	100.0
0°-180°	20371.1	100.0

Coefficient of Utilization



REPORT NUMBER: P525456


CATALOG NUMBER: IFLD-L-SA7A-927-U-44

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	8737.4	42.9			
FM	(30°-60°)	1123.2	5.5			
FH	(60°-80°)	288.6	1.4			G0/660
FVH	(80°-90°)	36.4	0.2			G1/100
BL	(0°-30°)	8737.4	42.9	B5		
BM	(30°-60°)	1123.2	5.5	B2/2500		
BH	(60°-80°)	288.6	1.4	B1/500		G0/660
BVH	(80°-90°)	36.4	0.2			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G1

Type V Short

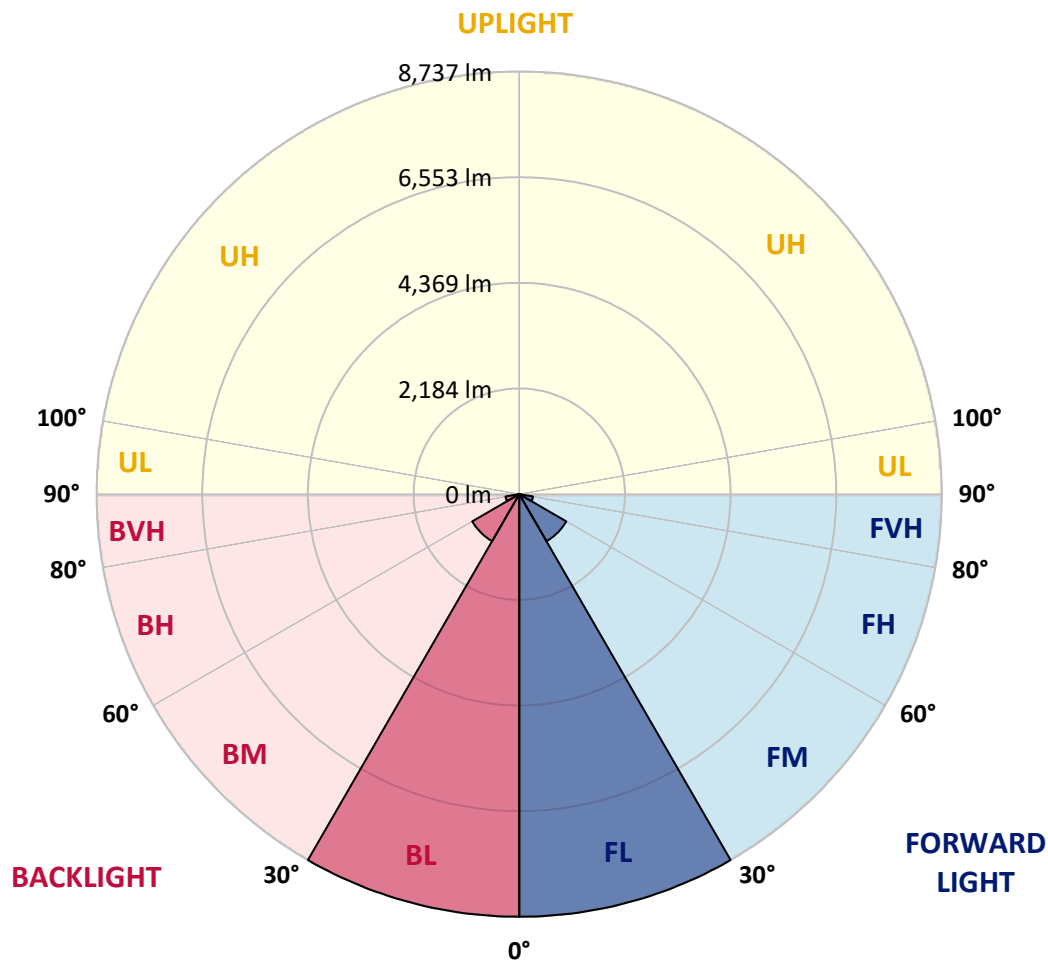

REPORT NUMBER: P525456

CATALOG NUMBER: IFLD-L-SA7A-927-U-44

CANDELA DISTRIBUTION (FULL):

0°	
0°	61057.3
1°	60739.5
2°	59922.6
3°	58568.2
4°	56622.6
5°	54112.7
6°	51038.5
7°	47601.9
8°	43871.2
9°	40116.7
10°	36525.7
11°	33294.0
12°	30463.3
13°	28137.6
14°	26284.1
15°	24825.7
17.5°	22125.7
20°	19612.8
22.5°	16669.3
25°	13250.5
27.5°	9353.4
30°	5082.2
32.5°	2922.8
35°	1951.5
37.5°	1330.7
40°	947.5
42.5°	733.7
45°	573.3
47.5°	469.3
50°	430.7
52.5°	409.9
55°	401.0
57.5°	415.8
60°	439.6
62.5°	430.7
65°	383.2
67.5°	329.7
70°	279.2
72.5°	231.7
75°	190.1
77.5°	154.5
80°	124.8
82.5°	101.0
85°	77.2
87.5°	26.7

REPORT NUMBER: P525456
CATALOG NUMBER: IFLD-L-SA7A-927-U-44

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)